




Commercial Refrigeration Catalogue 2022



Daikin world

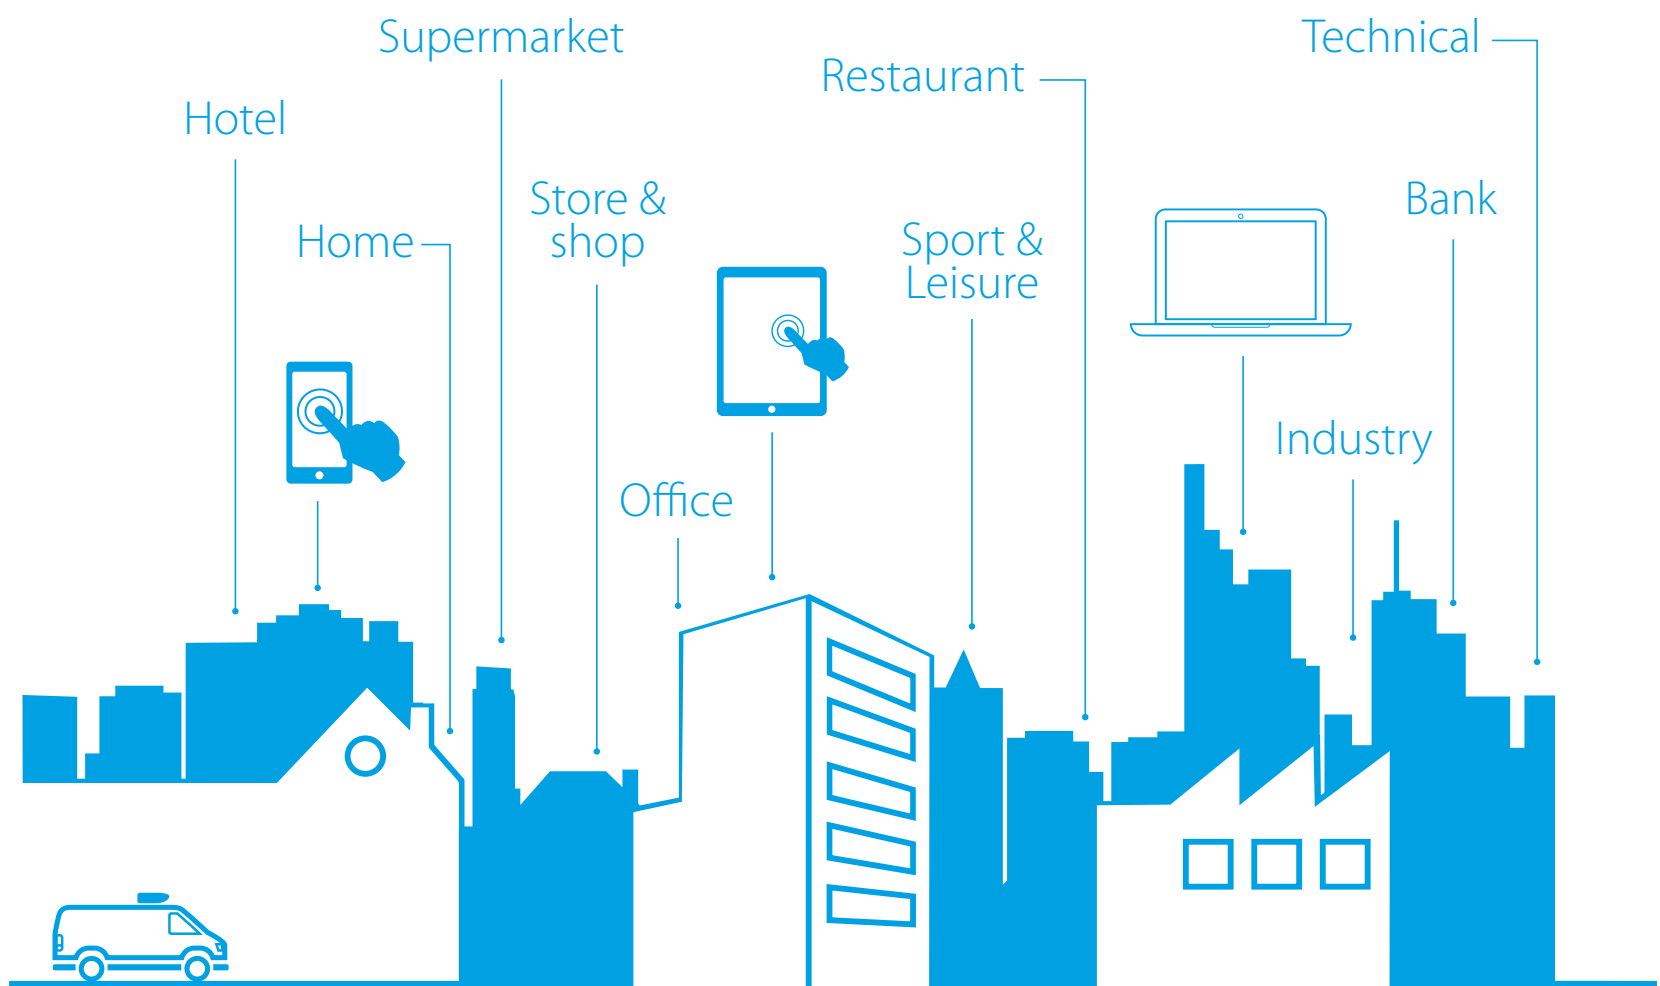

Daikin Europe N.V. is a leading manufacturer and supplier of heating, ventilation, air conditioning, refrigeration and control systems for the residential, commercial and industrial markets.

With more than 95 years of experience in air conditioning and climate control solutions, we know what it takes to create the perfect climate.

Our high-quality products are built to deliver maximum comfort, energy efficiency and reliability. Each unit also includes smart control, which means you have access to control your unit at any time, from anywhere and from any device.

We also offer a reliable network of technical and on-site support services through our online portal. Through web applications and tools, we help you monitor and manage your system to keep it running seamlessly.

As an innovation leader, we guarantee our products and services can help you achieve your perfect climate.

For more information, visit daikin.eu
or visit our Business Portal: my.daikin.eu 

Building a sustainable legacy together

Air is essential to our existence, and our role in protecting it continues to expand.

"Aiming for sustainable growth and a sustainable society through technological strength and outstanding human resources"

- Masanori Togawa, President and CEO, Daikin Industries, Ltd.



Since 1924, we have devoted ourselves with unbridled passion to overcome the ever-evolving challenges of air to become the leading manufacturer of heating, ventilation, air conditioning and refrigeration equipment. Leveraging our innovative technology, we deliver outstanding products and system solutions to provide comfortable and sustainable environments for all people and goods in all regions of the world.

This is, and always will be, the Daikin mission.



Innovation Means Continuous Improvement

We believe that there is always room for improvement, and this mindset is the driving force behind everything that we do at Daikin. From small advances in the production process, to major design breakthroughs that result in substantial energy savings, we aim to inspire technological change. With our regional development centers and global network of manufacturing and logistics facilities, we are serving the HVACR needs of the world.



Our Promise

For forward thinking consumers and businesses, Daikin is the all-inclusive partner, ensuring your peace of mind. For our professional customers, our brand promise is **Reliability - Sustainability - Efficiency.**

Building for the future

As market leaders in total solutions, we are constantly innovating to offer you a **comfortable, healthy and safe** environment, meeting your needs. Reliability, support and precision are characteristics of our future-proof products and services. We offer:

- A **wide range** of next-generation heat pumps to meet complex demands, including **easy upgrading**
- Expert **indoor air quality solutions** through our ventilation and filtration systems to eliminate pollutants and balance humidity levels

A journey we take together

Together we take on the sustainability journey. We provide expert **support** throughout the building life cycle and give **peace of mind** by ensuring what we do is **future-proof** and is helping to build a better future.

- Our team of **experts**, go beyond product support. Together we reach your green objectives.
- We are there for you, **all the time**: via our local customer support teams and e-commerce solutions.
- We're in it for the **long term**. We deliver what we commit to providing clear and trustworthy data.



INTRODUCTION
WHAT'S NEW
TOOLS AND PLATFORMS
PLUG AND PLAY SOLUTIONS FOR COLD ROOMS AND WINE ROOMS
DRYING AND AGEING UNITS
CONDENSING UNITS
CO ₂ CONDENSING UNITS
MULTI-COMPRESSORS PACKS AND RACKS
INTEGRATED SOLUTIONS
EVAPORATORS
OPTIONS FOR ZEAS AND CONVENI-PACK


Cold Chain Expertise

From production to delivery

Reshaping the future of cold chain supply

Combining refrigeration expertise with innovative technology, Daikin's comprehensive product portfolio delivers integrated temperature control solutions that improve quality and safety through every link in the distribution process from point of origin to the final consumer. Our range of products and services provide the flexibility to meet diverse customer needs across a range of applications, during production, storage, retail and transit. Energy-efficient technologies with low-GWP refrigerants provide reliable and cost-effective operation, safeguarding perishable supplies, whatever the climate, while protecting the environment.

We will leverage our strengths **to cover the entire cold chain.**

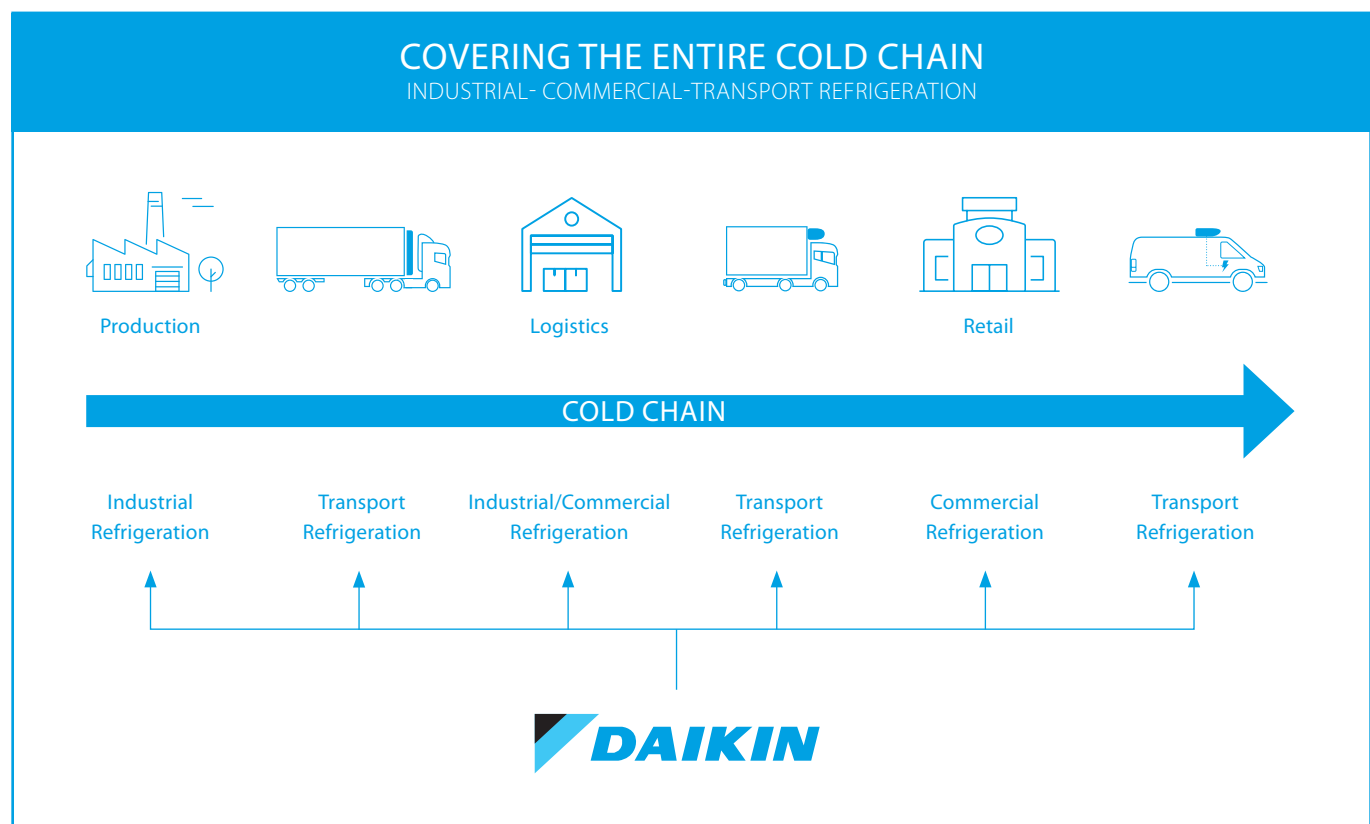

Vision 2050

Daikin Environmental Policy

Adopted in 2015, the Paris Agreement contains a target for the latter half of this century of reducing greenhouse gas emissions to net zero and limiting global warming by less than 2°C compared to pre-industrial levels. In the spirit of the Paris Agreement, Daikin has formulated Environmental Vision 2050, with a target of reducing greenhouse gas emissions to net zero by 2050. We have established a reduction target for 2030 and incorporated this into our efforts under the Fusion 25 Strategic Management Plan.


Our Vision 2050

We will reduce the greenhouse gas emissions generated throughout the entire lifecycle of our products by 2050. Furthermore, we are committed to creating solutions that link society and customers as we work with stakeholders to reduce greenhouse gas emissions to net zero. Using IoT and AI, and open innovation attempts, we will meet the world's needs for air solutions by providing safe and healthy air environments while at the same time contributing to solving global environmental problems.

Refrigeration Medium-Term Outlook

In our Cold Chain business, we are moving towards low-GWP and HFC-free natural refrigerants, while ensuring the correct safety standards are established in our markets. We maintain continuous focus on reducing the energy consumption of all our products. In the Transport Refrigeration industry, we will strive to lead the shift towards electrification and phase-down the reliance on combustion engine technologies.

Net-zero product lifecycle

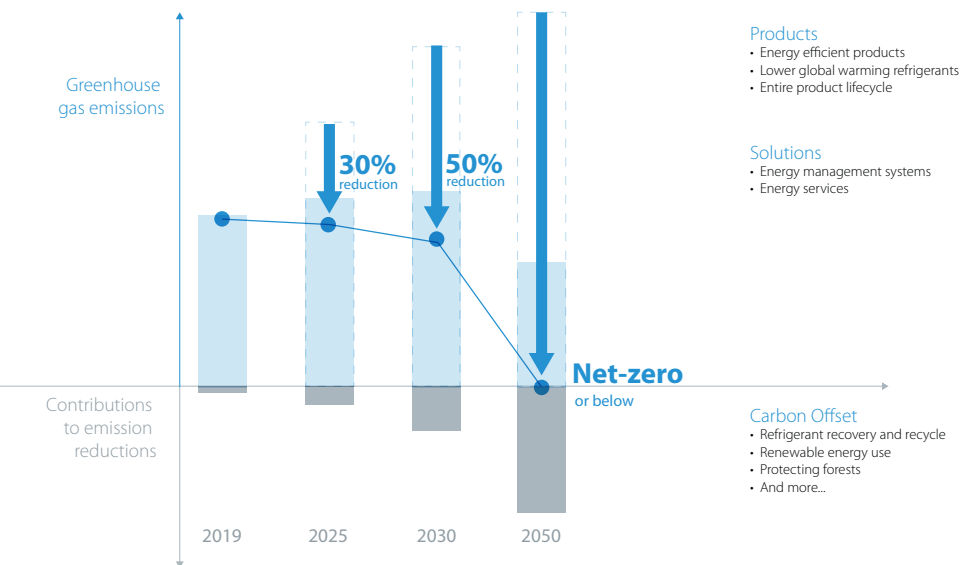

What's new in 2022



CO₂ ZEAS

COMING SOON!



Propane monoblock

COMING SOON!



CO₂ Round Flow Cassette


FXFN-A

p. 72 **NEW** Indoor unit compatible with
CO₂ Conveni-Pack / 360° air discharge
for optimum efficiency and comfort

Expansion Valve Box

BEV2N-A

p. 73 **NEW** To control the amount of refrigerant released into the evaporator of the CO₂ Cassette

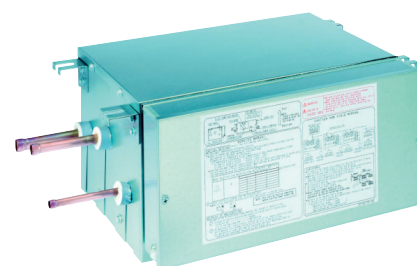

Kellner Acoustic Solution for Conveni-Pack

p. 75 **NEW** Developed to reduce the sound emissions of outdoor units



Solflex Acoustic Solution for Conveni-Pack

p. 76 **NEW** Developed to reduce the sound emissions of outdoor units



INTRODUCTION

WHAT'S NEW

TOOLS AND PLATFORMS

PLUG AND PLAY SOLUTIONS FOR COLD ROOMS AND WINE ROOMS

DRYING AND AGEING UNITS

CONDENSING UNITS

CO₂ CONDENSING UNITS

MULTI-COMPRESSORS PACKS AND RACKS

INTEGRATED SOLUTIONS

EVAPORATORS

OPTIONS FOR ZEAS AND CONVENI-PACK


Tools and platforms

We're here to help you!


Literature

See all the literature available (catalogues, flyers, solution guides, product profiles, product portfolios, reference book ...)

- › for you
- › for your customers

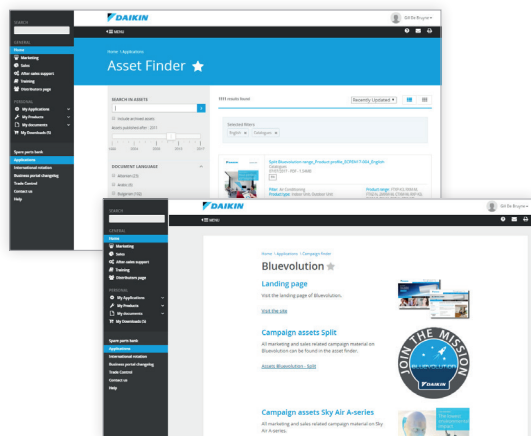

my.daikin.eu

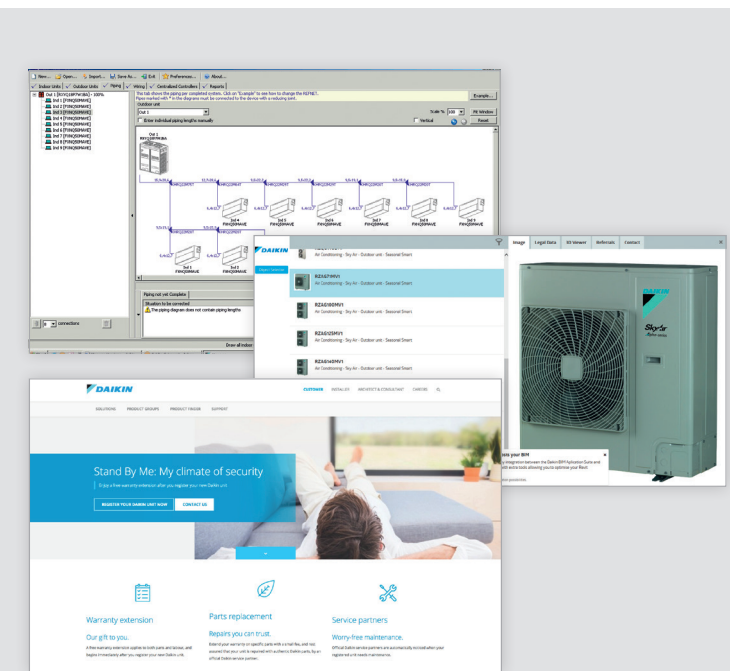

Sales supporting apps

We offer a variety of building modelling, selection, simulation and quotation software tools to support your sales.

An overview of all tools available can be found here



my.daikin.eu/denv/en_US/home/applications/select software finder



Webinar platform

Online seminars are a new way of sharing information with you. As this is not restricted in time or place, it is convenient for you to watch it whenever you want.

Check out our webinars now!






Online support

Business portal

- › Experience our Business Portal that thinks with you at my.daikin.eu
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop

my.daikin.eu 

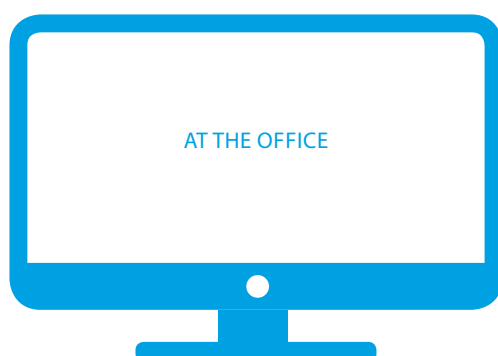

Internet

Find our solution for different applications:



www.daikin.eu 

› As Customer:

Experience your perfect climate with Daikin.



› As Installer:

Build your business with Daikin.



› As Architect & Consultant:

Create the perfect climate with Daikin.





Daikin is a strong challenger in the refrigeration market. We can create the ideal solution for each customer's specific situation.

As our products contain the latest technologies we ensure the highest energy efficiency. Our units are rigorously tested in order to provide you reliable operation.

With the acquisition of the Zanotti, Tewis and AHT groups, we expand our refrigeration business providing a larger and more diverse product line for all aspects in the cold chain.

Refrigeration

Why choose Daikin?	14
Daikin Refrigeration Group	16

Plug and Play solutions for cold rooms and wine rooms 20

Monoblocks	22
Bi-Blocks	28
Monoblocks for wine application	31

Drying and ageing units 33

Condensing units	37
JEHCCU / JEHSCU	38
GCI / HCI	42
ZEAS	44

CO₂ condensing units 49

GCU/HCU	50
NOVA	52
NV66	53
NV66+	54

Multi-compressor packs and racks 56

Integrated Solutions 64

Conveni-Pack	66
CO ₂ Conveni-Pack	68

Evaporators 80

Evaporators range	81
-------------------	----

Options 83

ZEAS and Conveni-Pack	83
-----------------------	----

Any refrigeration system that contains fluorinated greenhouse gases is in scope of the F-gas regulations.

For fully/partially pre-charged equipment: contains fluorinated greenhouse gases. Actual refrigerant charge depends on the final unit construction, details can be found on the unit labels.

For non pre-charged equipment (including, but not limited to racks): its functioning relies on fluorinated greenhouse gases.

The F-gas regulations do not apply to systems that contain only natural refrigerants such as propane (R-290) and carbon dioxide (R-744).

Refrigerant	GWP AR4	GWP AR5
R-134A	1,430	1,300
R-407C	1,774	1,620
R-407F	1,825	1,670
R-407H	1,490	1,380
R-410A	2,088	1,920
R-448A	1,387	1,270
R-449A	1,397	1,280
R-452A	2,141	1,945
R-290	3	3
R-744	1	1



Inverter technology



Scroll compressor



Screw compressor



Reciprocating compressor



Swing compressor

For latest data, please consult my.daikin.eu



Why choose Daikin?

We know refrigeration inside out

- We have over 100 years of experience in the Refrigeration business.
- We can meet all refrigeration needs from farm to fork, thanks to our wide range of refrigeration products.
- Innovative and reliable own technology and expertise on refrigerants, controls and compressors!
- Your advisor for solutions to meet your needs in line with legislation (F-gas regulation, ecodesign,...) and with focus on reliability, safety, Total Equivalent Warming Impact (see page 7) and running cost.

Controlled temperatures throughout the whole supply chain

POST HARVEST PROCESSING

FOOD PROCESSING

WAREHOUSING

FOOD RETAIL

RESTAURANTS/PUBS

HOME DELIVERY SOLUTIONS

PHARMA SOLUTIONS

Truck - Transport ref
LONG Distances

Light truck - Transport ref
MEDIUM Distances

Van - Transport ref
SHORT Distances

We can meet all refrigeration needs from farm to fork

Our extended product line-up is able to provide solutions for:

FOOD RETAIL

EVENT SPACES

COLD STORAGE

CATERING

CHILLED TRANSPORT

HOTELS

ICE SKATING RINKS

CLEANROOMS/HOSPITALS

BREWERY

BAR

FISHERY

SEASONING (CHEESE/MEAT)

BUTCHERS

RESTAURANTS

INDUSTRY

...

We can fulfill any refrigeration need

INTRODUCTION
WHAT'S NEW
TOOLS AND PLATFORMS
PLUG AND PLAY SOLUTIONS FOR COLD ROOMS AND WINE ROOMS
DRYING AND AGEING UNITS
CONDENSING UNITS
CO ₂ CONDENSING UNITS
MULTI-COMPRESSORS PACKS AND RACKS
INTEGRATED SOLUTIONS
EVAPORATORS
OPTIONS FOR ZEAS AND CONVENI-PACK

Daikin Refrigeration – United in cold



Hubbard Products Ltd., is one of the UK's leading designers, manufacturers and suppliers of commercial cooling equipment and has earned an enviable Global reputation for innovation and design-led excellence.



Daikin Europe N.V. is a major European producer of air conditioners, heating systems and refrigeration equipment, with approximately 5,500 employees throughout Europe and major manufacturing facilities based in Belgium, the Czech Republic, Germany, Italy, Turkey and the UK. Globally, Daikin is renowned for its pioneering approach to product development and the unrivalled quality and versatility of its integrated solutions.



AHT develops, manufactures and sells refrigerating and freezing showcases specifically suited for food retailers. Leading the "plug-in" type showcases segment, AHT leads the market by the active launch of new products corresponding to evolving store layouts. Furthermore, utilizing its technological capabilities and business resources, AHT serves large accounts which include major food retail chains worldwide.



Tewis is a leading company in the design and engineering of refrigeration systems. Along with their expertise in customising controls (including monitoring), Tewis offers total comprehensive solutions for Refrigeration and Climate applications. Over the last few years, Tewis has focused on developing a range of CO₂ based refrigeration systems and has established a long-lasting relationship with key Spanish and Portuguese food retailers. Its mission and philosophy to date has been to achieve high reliability and realise remarkable energy savings for their customer base.



Daikin Chemicals

Daikin Chemicals is one of the world's foremost manufacturer of fluorochemical products and is a leading expert in that field. We strive to find new possibilities for living and industry by making the most of fluorine characteristics using our own exclusively developed technologies.



Zanotti is a refrigeration specialist founded in 1962. With over 50 years of experience in food storing services covering the needs of commercial and industrial refrigeration, but also the needs of the transportation of fresh and frozen products. Zanotti changed the refrigeration world from the early days with the introduction of the Uniblock, an all in one plug and play refrigeration unit for cold rooms. Today they employ more than 600 people, with three production facilities and an annual turnover of approx 130 million Euro.




Meeting customer needs!

Depending on type of application, location and customers interest/values, the optimal refrigeration solution for the customer can potentially be different! **Thanks to our wide product portfolio, Daikin can offer what a customer really needs!**

The DNA of our Advice is:

- ✓ Safety and Reliability
- ✓ Reducing the Total Equivalent Warming Impact (TEWI)

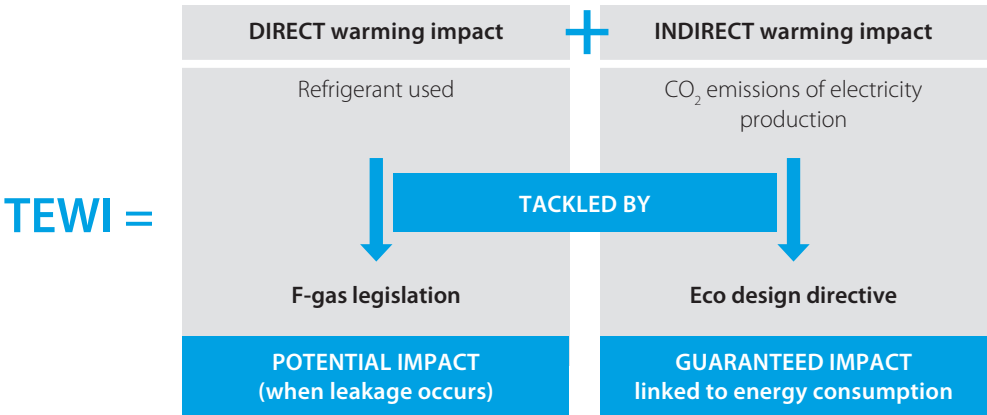

Reduction of CO₂ emissions is one of the main priorities for the future. A refrigeration plant’s global warming effect is the combination of the possible refrigerant losses (Direct warming impact) and the CO₂ emissions caused by electricity production (Indirect warming impact). Country per country situation is different, however on average in Europe CO₂ release at energy production is quite high (average 0,45kg/ kwh of Electrical Energy)! Due to this, there is a significant greenhouse effect over the lifetime of the refrigeration plant and efficiency is thus one of the crucial focus points in reducing TEWI!

When various refrigeration solutions are being compared it is thus important to take into account both aspects as in some cases optimizing the direct warming impact (eg: changing refrigerant) will have an opposite effect on the indirect warming impact!

- ✓ Reducing your running cost

Through focus on reliability & quality, through extensive testing on each product, and energy efficiency our aim is to reduce your operational cost to the absolute minimum!





E. LECLERC, HYPERMARKET
ZEAS



BEER COOLING FACILITY,
CHILLED WITH ZEAS



EDEKA, SUPERMARKET
CONVENI-PACK (2) AND ZEAS (1)




COOMBE FISHERIES
HIGH-PERFORMANCE ZANOTTI LT REFRIGERATION EQUIPMENT



ZIGGO DOME, EVENT HALL
ZEAS FOR COOLING (6) AND FREEZING (2)



YouTube





Plug and Play solutions for cold rooms and wine rooms

Zanotti

Touch control


Zanotti presents the new "Touch Screen" control panel for GM monobloc units and GS split units. This new one User interface consists of keypad and display and allows easy access to all manual functions of the units.

The control of the refrigeration cycle, switching the unit on and off, the lighting in the cold room, activating the manual defrost process and setting the parameters are the features that are more intuitive with the new keyboard.



GM Monobloc Unit

GS Split Unit

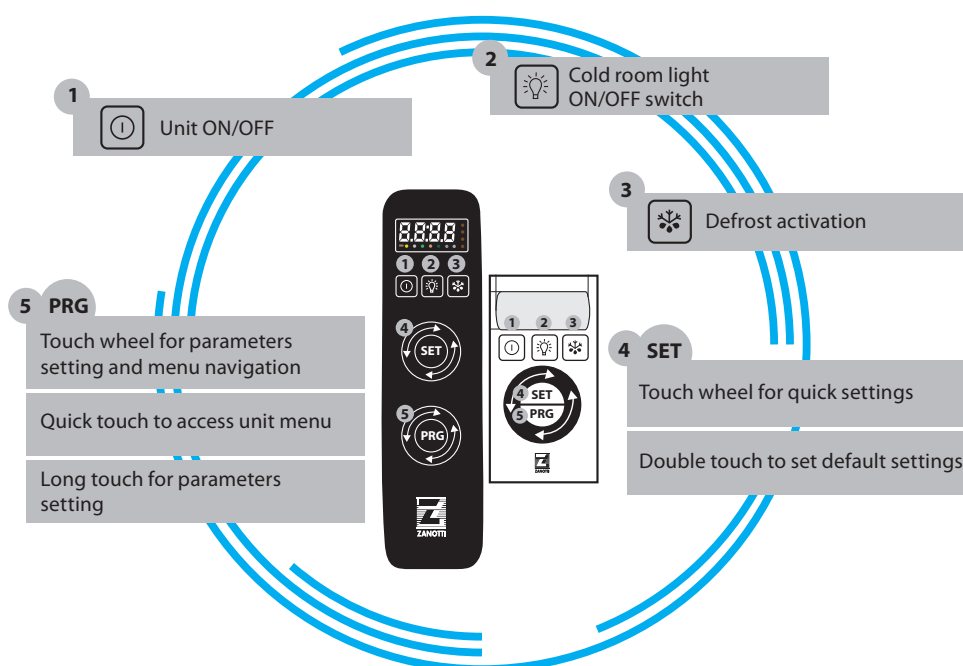

for two units in a cold storage cell

ALTERNATIVE REMOTE CONTROL

- › For cold rooms where it is required by law to maintain a certain temperature (Products for hospitals, Pharmaceutical products) for safety and control it is necessary to install 2 units in the same cold room, so that they can always be working in alternate hours - when one is off, the other unit is working.
- › If an aggregate in full function gets blocked, the second aggregate starts automatically. When the temperature for remote controls with thermostat is not achieved for a certain period of time (product feed, open cell door for longer period of time,...), the unit changes into the standby function.
- › Remote control for two aggregates. Adjustable timer for alternate operation.
- › In case of device failure of one the refrigeration units, the control can be switched on the other unit nearby. Alarm message through Lamp and buzzer.
- › Thermostat for Safety at high Temperatures in the cold room (only with models with Thermostat).

For customized options, please contact your sales representative.

Monoblock units suitable for container

AS-H is a special unit for outdoor installation

The AS-H series models are monoblock units for outdoor installation designed for the preservation of fresh products in small-medium size rooms and occasionally subject to movement. Ideal for refrigerating goods inside containers.

- › Suitable for refrigerating goods inside containers
- › Special units for outdoor installations
- › Extremely solid and effective
- › Easy, fast and cost-effective installation
- › Precise and functional control of the unit



Standard configuration

- › Hermetic compressor
- › Filter dryer
- › Four-pole condenser fan
- › Cataphoresis to the condenser coil
- › Capillary tube expansion
- › Separator/accumulator
- › Condensate evaporation tray
- › Cataphoresis to evaporator coil
- › Hot gas defrost
- › Refrigerant charge
- › Electronic thermostat for unit control
- › Switchboard with protection fuses
- › Condenser fan pressure switch
- › Fixed calibration Lp switch with automatic reset
- › Adjustable calibration Lp switch with automatic reset
- › 100mm panel for wall mounting
- › Crankcase heater
- › Double defrost solenoid valve
- › External power supply plug
- › 1m cold room lighting cable
- › 3m micro-switch door cable

Cooling capacity calculation conditions

Medium temperature units: [TC=0°C | TA=30°C]

Low temperature units: [TC=-20°C | TA=30°C]

Dual-temperature units: [TC=-20°C | TA=30°C]

	Medium temperature units								Low temperature units			
	MAS106EA23XH	MAS107EA23XH	MAS211EA23XH	MAS320EB23XH	MAS430EB24XH	MAS535EB24XH	MAS545EB24XH	MAS660EB24XH	BAS110DA23XH	BAS112DA23XH	BAS117DA23XH	
Refrigerant	R134a								R452A			
Power supply	V/Ph~/Hz	220-230/1N~/50			380-400/3N~/50				220-230/1N~/50			
HP compressor		3/4	1	1.2	3.5	5	6.5	8.5	10	1	1.2	1.7
Defrost		Hot gas										
PED category		0				1	2			0		
Working temperature	°C	+10 ÷ -5								-15 ÷ -25		
Cooling capacity	Watt	1,140	1,422	1,816	3,492	4,981	6,988	8,290	10,424	662	905	1,164

	Low temperature units							Dual-temperature units				
	BAS218DA23XH	BAS320DB23XH	BAS330DB23XH	BAS445DB24XH	BAS450DB24XH	BAS560DB24XH	BAS680DB24XH	PAS330DB23XH	PAS450DB24XH	PAS565DB24XH	PAS695DB24XH	
Refrigerant	R452A											
Power supply	V/Ph~/Hz	220-230/1N~/50		380-400/3N~/50								
HP compressor		1.7	2	3	4	5	7.5	10	3	5	7.5	10
Defrost		Hot gas										
PED category		0	0	0	2				0	2		
Working temperature	°C	-15 ÷ -25							+10 ÷ -5 -15 ÷ -25			
Cooling capacity	Watt	1,436	2,384	2,581	3,628	4,541	6,689	8,663	2,581	4,541	6,689	8,663

Monoblock units suitable for products storage in mobile cold rooms

The AS-E range models are monoblock units for outdoor installation designed for the storage of fresh products in rooms mounted on trailers subject to continuous movement.

- › Suitable for the storage of fresh products in cold rooms mounted on trailers subject to continuous movement
- › Special units for outdoor installations
- › Extremely solid and effective
- › Easy, fast and cost-effective installation
- › Precise and functional control of the unit

Standard configuration

- › Scroll compressor
- › Filter dryer
- › Four-pole condenser fan
- › Cataphoresis to the condenser coil
- › Capillary tube expansion
- › Thermal expansion valve (on dual-temperature models)
- › Separator/accumulator
- › Condensate evaporation tray
- › Cataphoresis to evaporator coil
- › Hot gas defrost
- › Refrigerant charge
- › Electronic thermostat for unit control
- › Switchboard with protection fuses
- › Condenser fan pressure switch
- › Fixed calibration Lp switch with automatic reset
- › Adjustable calibration Lp switch with automatic reset
- › 100mm panel for wall mounting
- › Crankcase heater
- › Double defrost solenoid valve
- › External power supply plug
- › 1m cold room lighting cable
- › 3m micro-switch door cable


Cooling capacity calculation conditions

Medium temperature units: [TC=0°C | TA=30°C]

Low temperature units: [TC=-20°C | TA=30°C]

Dual-temperature units: [TC=-20°C | TA=30°C]

		Medium temperature units									
		MAS320EB23TE	MAS430EB24TE	MAS535EB24TE	MAS545EB24TE	MAS660EB24TE	MAS320BB23TE	MAS430BB24TE	MAS535BB24TE	MAS545BB24TE	MAS660BB24TE
Refrigerant		R134a					R449A				
Supply voltage	V/Ph~/Hz	380-400/3N~/50									
HP compressor		4	6	7	9	10	2.3	3.5	4	6	7.5
Defrost		Hot gas									
PED category		1				2	1				2
Working temperature	°C	+10 ÷ -5									
Cooling capacity	Watt	3,770	5,942	7,462	9,007	12,084	3,561	5,606	6,853	9,325	11,011
		Low temperature units					Dual-temperature units				
		BAS330BB23TE	BAS450BB24TE	BAS555BB24TE	BAS560BB24TE	BAS680BB24TE	PAS330BB23TE	PAS450BB24TE	PAS565BB24TE	PAS695BB24TE	
Refrigerant		R449A									
Supply voltage	V/Ph~/Hz	380-400/3N~/50									
HP compressor		3.5	5	6	7.5	10	3.5	5	7.5	10	
Defrost		Hot gas									
PED category		1			2			1		2	
Working temperature	°C	-15 ÷ -25					+10 ÷ -5 -15 ÷ -25				
Cooling capacity	Watt	2,753	4,100	5,100	6,233	8,127	2,753	4,100	6,233	8,127	

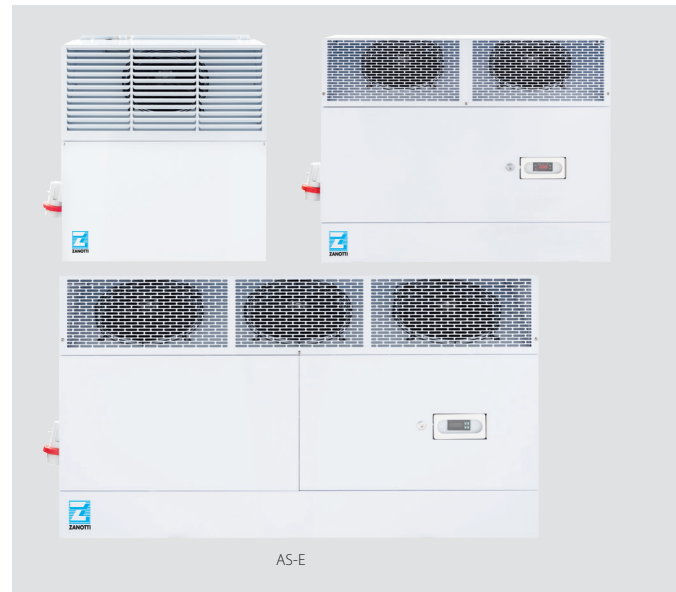

Monoblock units suitable for medium-large size cold rooms and freezing tunnels

Extreme versatility of use, suitable for freezing tunnels

The RS series models are monoblock units characterized by extreme versatility of use, ideal for medium-large rooms.

- › Extreme versatility of use, low-medium temperatures, polyvalent temperatures and freezing tunnels
- › Suitable for different types of applications
- › Compact and highly resistant to any environmental condition
- › Solenoid valve and thermostatic valve for high efficiency
- › Control panel with electromechanical instrumentation for controlling all the functionalities of the machine



Medium temperature units		MRS235T01E	MRS145T01E	MRS150T01E	MRS245N01E	MRS245T01E	MRS250N01E	MRS250T01E	MRS251T01E	MRS351N01E				
Refrigerant		R134a												
Power supply	V/Ph~/Hz	380-400/3N~/50												
Compressor type		Hermetic					Semi-hermetic							
HP compressor		5	6.5	8.5	10	13	12	15	25	25				
Defrost		Electric												
PED category		2												
Working temperature	°C	+10 ÷ -5												
Cooling capacity	Watt	5,140 (*)	6,776 (*)	8,063 (*)	10,179 (*)	14,774 (*)	17,183 (*)	20,973 (*)	26,945 (*)	28,672 (*)				
[TC=0°C TA=30°C]														
Medium temperature units		MRS351T01E	MRS235T11E	MRS145T11E	MRS150T11E	MRS245N11E	MRS245T11E	MRS235T01B	MRS145T01B	MRS150T01B	MRS245N01B	MRS245T01B	MRS250N01B	
Refrigerant		R134a						R449A						
Power supply	V/Ph~/Hz	380-400/3N~/50												
Compressor type		Semi-hermetic						Hermetic						
HP compressor		30	4		5		12	3	4	5	7.5	10		
Defrost		Electric												
PED category		2												
Working temperature	°C	+10 ÷ -5												
Cooling capacity	Watt	35,130 (*)	5,561 (*)	6,435 (*)	7,686 (*)	10,103 (*)	16,682 (*)	5,211	6,798	8,763	12,369	13,715	18,431	
[TC=0°C TA=30°C]														
Medium temperature units		MRS250T01B	MRS251T01B	MRS351N01B	MRS351T01B	MRS235T11B	MRS145T11B	MRS150T11B	MRS245N11B	MRS245T11B	MRS250N11B	MRS250T11B		
Refrigerant		R449A												
Power supply	V/Ph~/Hz	380-400/3N~/50												
Compressor type		Hermetic	Semi-hermetic											
HP compressor		15	20	25	30	3	3	4	5	7.5	10	15		
Defrost		Electric												
PED category		2												
Working temperature	°C	+10 ÷ -5												
Cooling capacity	Watt	21,990	26,114	35,976	38,891	6,770 (*)	8,825 (*)	10,426 (*)	14,035 (*)	19,097 (*)	23,350 (*)	25,372 (*)		
[TC=0°C TA=30°C]														
Low temperature units		BRS235N01B	BRS235T01B	BRS145N01B	BRS145T01B	BRS150N01B	BRS150T01B	BRS245N01B	BRS245T01B	BRS250N01B	BRS250T01B	BRS251T01B	BRS351N01B	BRS351T01B
Refrigerant		R449A												
Power supply	V/Ph~/Hz	380-400/3N~/50												
Compressor type		Semi-hermetic												
HP compressor		4	5	5	7.5	7.5	10	12.5	15	20	25	30	40	50
Defrost		Electric												
PED category		2												
Working temperature	°C	-15 ÷ -25												
Cooling capacity	Watt	3,547 (*)	4,297	5,609	7,413	8,191	8,670	11,102	14,423	18,531	21,344	23,648	31,599	35,030
[TC=-20°C TA=30°C]														
Freezing and dual-temperature units		Freezing					Dual-temperature							
		CRS150N001B	CRS150T001B	CRS250N001B	CRS250T001B	PRS235T001B	PRS145T001B	PRS150T001B	PRS245T001B	PRS251T001B				
Refrigerant		R449A												
Power supply	V/Ph~/Hz	380-400/3N~/50												
Compressor type		Semi-hermetic												
HP compressor		7.5	10	15	25	5	7.5	10	15	30				
Defrost		Electric												
PED category		2												
Working temperature	°C	-30 ÷ -50					+5 ÷ -5 -15 ÷ -25							
Cooling capacity	Watt	5,188	7,373	16,721	22,251	5,645	7,424	8,669	14,123	21,923				
Freezing [TC=30°C TEV=-35°C]														
Dual-temperature [TC=-20°C TA=30°C]														

(*) Tentative data


Monoblock system for low and medium temperature refrigeration

For wall mounted installation in small and medium sized cold rooms

- › Rapid mounting on the wall of the cold room by straddle-mounting, which is ideal for new installations or through-wall mounting and refurbishment projects
- › Metallic grey coloured finish of the outdoor unit
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Compressor compartment insulated with suitable soundproofing material to reduce sound levels
- › Microchannel condensers available in order to reduce the refrigerant charge as much as possible and ensuring higher energy efficiency
- › The units are provided with a new generation control panel with an easy-to-use interface



Installation type

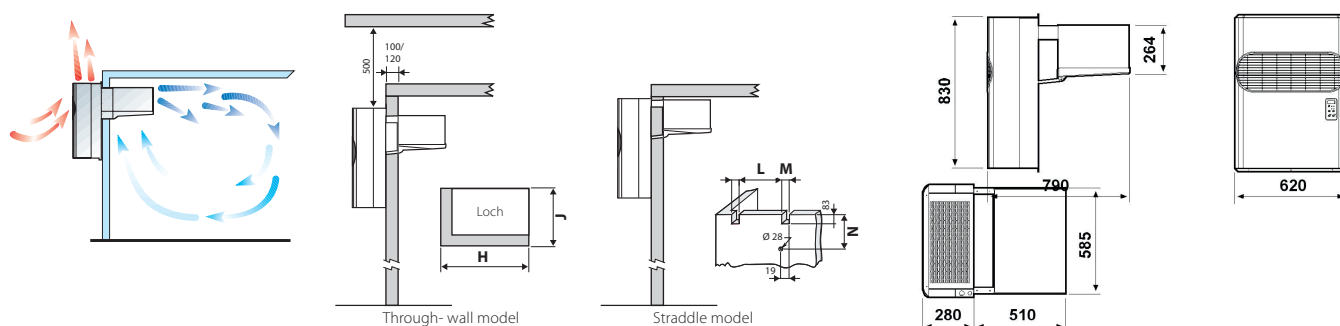

More details and final information can be found by scanning or clicking the QR codes.



Medium temperature units	MGM103EA11XA	MGM105EA11XA	MGM106EA11XA	MGM107EA11XA	MGM110EA11XA	MGM211EA11XA	MGM212EB11XA	MGM315EB11XA	MGM320EB11XA
Refrigerant	R134a								
Power supply V/Ph~/Hz	220-230/1N~/50						380-400/3N~/50		
HP compressor	1/2	5/8	3/4	1	1.2	1.2	2.3	3	3.5
Defrost	Hot gas								
PED category	0								
Working temperature °C	+10 ÷ -5								
Cooling capacity Watt [TC=0°C TA=30°C]	855	978	1,120	1,315	1,351	1,806	2,034	3,079	3,351
Low temperature units	BGM110DA11XA	BGM112DA11XA	BGM117DA11XA	BGM218DA11XA	BGM220DB11XA	BGM320DB11XA	BGM330DB11XA	BGM340DB11XA	
Refrigerant	R452A								
Power supply V/Ph~/Hz	220-230/1N~/50						380-400/3N~/50		
HP compressor	1	1.2	1.7	1.7	2	3	4		
Defrost	Hot gas								
PED category	0								
Working temperature °C	-15 ÷ -25								
Cooling capacity Watt [TC=-20°C TA=30°C]	679	889	1,155	1,429	1,688	2,491	2,701	3,160	




Monoblock system for low and medium temperature refrigeration

For wall mounted installation in medium sized cold rooms

- › Rapid mounting on the wall of the cold room by through-wall mounting
- › Extremely fast to assemble, reducing installation time and cost
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Very compact and very efficient
- › Remote electronic command station with easy-to-use user interface programmable according to various system requirements
- › Low temperature models are available. Please contact your local dealer



Installation type

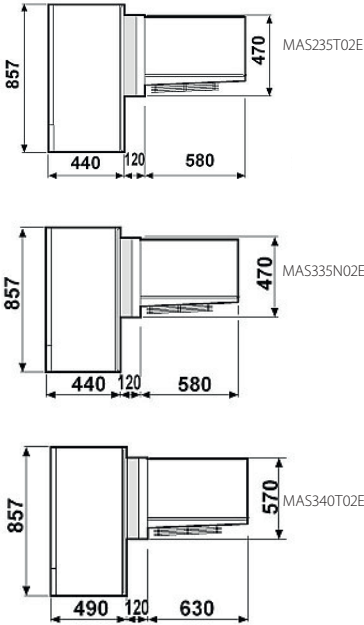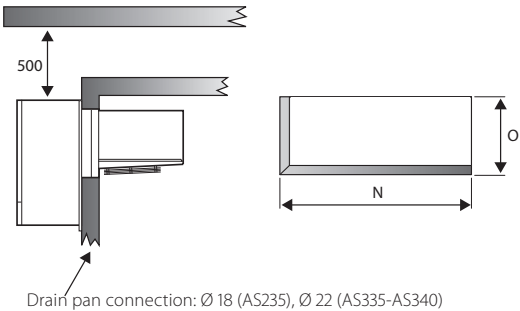

More details and final information can be found by scanning or clicking the QR codes.



	Medium temperature units				Low temperature units		
	MAS430EB13XX	MAS535EB13XX	MAS545EB13XX	MAS660EB13XX	BAS450DB13XX	BAS560DB13XX	BAS680DB13XX
Refrigerant	R134a				R452A		
Power supply	V/Ph~/Hz	380-400/3N~/50					
HP compressor	5	6.5	8.5	10	5	7.5	10
Defrost	Hot gas						
PED category	1	2					
Working temperature	°C	+10 ÷ -5					
Cooling capacity	Watt	4,981	6,988	8,290	10,424	-	
[TC=0°C TA=30°C]							
Cooling capacity	Watt	-			4,541	6,689	8,663
[TC=-20°C TA=30°C]							


Monoblock system for low and medium temperature refrigeration

For roof mounted installation in small and medium sized cold rooms

- › Rapid mounting on the roof of the cold room
- › Ceiling assembly leaves the space inside the cold room completely free
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Extremely fast to assemble, reducing installation time and cost
- › Best surface-to-capacity ratio
- › Remote electronic command station with easy-to-use user interface programmable according to various system requirements



Installation type

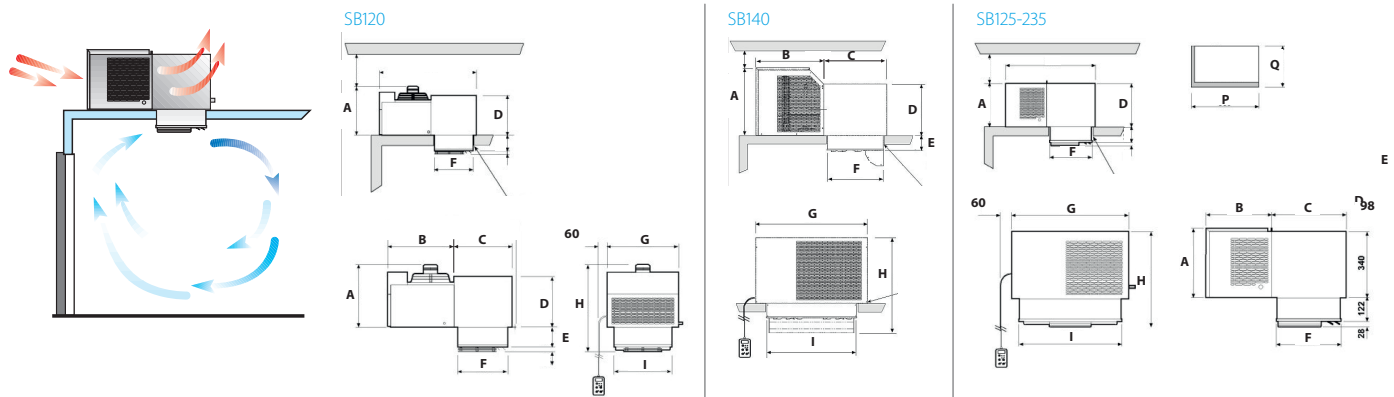

More details and final information can be found by scanning or clicking the QR codes.



Medium temperature units		MSB005EA11XX	MSB106EA11XX	MSB107EA11XX	MSB210EA11XX	MSB212EB11XX	MSB315EB11XX	MSB320EB11XX	MSB425EB11XX	MSB530EB13XX
Refrigerant		R134a								
Power supply	V/Ph~/Hz	220-230/1N~/50				380-400/3N~/50				
HP compressor		5/8	3/4	1	1.2	2.3	3	3.5	4	5
Defrost		Hot gas								
PED category		0								
Working temperature	°C	+10 ÷ -5								
Cooling capacity	Watt	857	1,120	1,338	1,799	2,022	3,282	3,550	3,774	4,871
[TC=0°C TA=30°C]										
Low temperature units		BSB010DA11XX	BSB117DA11XX	BSB220DB11XX	BSB330DB11XX	BSB440DB11XX	BSB545DB13XX	BSB550DB13XX		
Refrigerant		R452A								
Power supply	V/Ph~/Hz	220-230/1N~/50			380-400/3N~/50					
HP compressor		3/4	1.7	2	3	3.5	4	5		
Defrost		Hot gas								
PED category		0					2			
Working temperature	°C	-15 ÷ -25								
Cooling capacity	Watt	628	1,162	1,699	2,596	3,097	3,890	4,849		
[TC=-20°C TA=30°C]										


Bi-block system for low and medium temperature refrigeration

Condensing unit for wall mounted installation

- › Wall mounted condensing unit and ceiling mounted evaporator
- › Extremely rapid mounting
- › Best surface-to-capacity ratio
- › Low sound levels thanks to optional compressor compartment soundproofing
- › New generation control panel: possibility to connect it to classic remote management systems or to a Modbus system



Installation type



More details and final information can be found by scanning or clicking the QR codes.



GS

Medium temperature units		SB. MGS103EA11XX	SB. MGS105EA11XX	SB. MGS106EA11XX	SB. MGS107EA11XX	SB. MGS110EA11XX	SB. MGS211EA11XX	SB. MGS212EB11XX	SB. MGS315EB11XX	SB. MGS320EB11XX
Refrigerant		R134a								
Power supply	V/Ph~/Hz	220-230/1N~/50						380-400/3N~/50		
HP compressor		1/2	5/8	3/4	1	1.2	1.2	2.3	3	3.5
Defrost		Electric								
PED category		0								
Working temperature	°C	+10 ÷ -5								
Cooling capacity [TC=0°C TA=30°C]	Watt	855	978	1,120	1,315	1,351	1,806	2,034	3,079	3,351
Low temperature units		SB. BGS110DA11XX	SB. BGS112DA11XX	SB. BGS117DA11XX	SB. BGS218DA11XX	SB. BGS220DB11XX	SB. BGS320DB11XX	SB. BGS330DB11XX	SB. BGS340DB11XX	
Refrigerant		R452A								
Power supply	V/Ph~/Hz	220-230/1N~/50					380-400/3N~/50			
HP compressor		1	1.2	1.7	1.7	2	2	3	4	
Defrost		Electric								
PED category		0								2
Working temperature	°C	-15 ÷ -25								
Cooling capacity [TC=-20°C TA=30°C]	Watt	679	889	1,155	1,429	1,688	2,491	2,701	3,160	


Bi-block system for low and medium temperature refrigeration

Condensing unit for floor standing or roof mounted installation

- › Condensing unit for floor standing or roof mounted installation and ceiling mounted evaporator
- › Extremely fast to assemble thanks to quick connection joints
- › Reduced installation time and cost
- › Best surface-to-capacity ratio



Installation type



More details and final information can be found by scanning or clicking the QR codes.



Medium temperature units		SB. MSP106EA11XX	SB. MSP107EA11XX	SB. MSP212EA11XX	SB. MSP315EB11XX	SB. MSP320EB11XX		
Refrigerant		R134a						
Power supply	V/Ph~/Hz	220-230/1N~/50			380-400/3N~/50			
HP compressor		3/4	1	1.2	3	3.5		
Defrost		Electric						
PED category		0						
Working temperature	°C	+10 ÷ -5						
Cooling capacity	Watt	1,140	1,422	1,816	3,188	3,492		
[TC=0°C TA=30°C]								
Low temperature units		SB. BSP110DA11XX	SB. BSP112DA11XX	SB. BSP117DA11XX	SB. BSP218DA11XX	SB. BSP220DB11XX	SB. BSP320DB11XX	SB. BSP330DB11XX
Refrigerant		R452A						
Power supply	V/Ph~/Hz	220-230/1N~/50			380-400/3N~/50			
HP compressor		1	1.5	1.7	1.7	2	3	
Defrost		Electric						
PED category		0						
Working temperature	°C	-15 ÷ -25						
Cooling capacity	Watt	662	905	1,164	1,436	1,719	2,384	2,581
[TC=-20°C TA=30°C]								


Bi-block system for low and medium temperature refrigeration

Condensing unit for floor standing or roof mounted installation

- › Condensing unit for floor standing or roof mounted installation and ceiling mounted evaporator
- › Thermostatic expansion valve ensuring optimum capacity in accordance with the required load for better energy efficiency
- › Extremely fast to assemble thanks to quick connection joints
- › Reduced installation time and cost
- › Best surface-to-capacity ratio
- › For higher capacities, please contact your local dealer



Installation type



More details and final information can be found by scanning or clicking the QR codes.



DB-O

Medium temperature units		SB. MDB106EA11XX	SB. MDB107EA11XX	SB. MDB122EB11XX	SB. MDB315EB11XX	SB. MDB320EB11XX	SB. MDB425EB11XX	SB. MDB530EB13XX *	SB. MDB635EB13XX *	SB. MDB645EB13XX *	SB. MDB706EB13XX *	SB. MDB707EB13XX *
Refrigerant		R134a										
Power supply	V/Ph~/Hz	220-230/1N~/50				380-400/3N~/50						
HP compressor		3/4	1	1.2	3	3.5	4	3.7	4.8	6.3	7.4	9.5
Defrost		Electric										
PED category		1						2				
Working temp.	°C	+10 ÷ -5										
Cooling capacity [TC=0°C TA=30°C]	Watt	1,140	1,422	1,816	3,188	3,492	3,948	5,070	7,293	8,779	11,014	14,069
Cooling capacity [TC=-20°C TA=30°C]	Watt	-										

Low temperature units		SB. BDB110DA11XX	SB. BDB112DA11XX	SB. BDB117DA11XX	SB. BDB218DA11XX	SB. BDB220DB11XX	SB. BDB320DB11XX	SB. BDB330DB11XX	
Refrigerant		R452A							
Power supply	V/Ph~/Hz	220-230/1N~/50						380-400/3N~/50	
HP compressor		1	1.5	1.7			2		3
Defrost		Electric							
PED category		1							
Working temp.	°C	-15 ÷ -25							
Cooling capacity [TC=0°C TA=30°C]	Watt	-							
Cooling capacity [TC=-20°C TA=30°C]	Watt	662	905	1,164	1,436	1,719	2,384	2,581	

Low temperature units		SB. BDB440DB11XX	SB. BDB445DB11XX	SB. BDB550DB13XX *	SB. BDB660DB13XX *	SB. BDB680DB13XX *	SB. BDB710DB13XX *	SB. BDB713DB13XX *
Refrigerant		R452A						
Power supply	V/Ph~/Hz	380-400/3N~/50						
HP compressor		3.5	4	3.7	5.5	7.5	9.6	11
Defrost		Electric						
PED category		2						
Working temp.	°C	-15 ÷ -25						
Cooling capacity [TC=0°C TA=30°C]	Watt	-						
Cooling capacity [TC=-20°C TA=30°C]	Watt	3,283	3,604	4,925	7,492	8,940	11,537	12,735

* Only for external use




Monoblock units for wine application

Monoblock system suitable for through-wall installation

- › Accurate humidity and temperature control to guarantee the quality of products (e.g. wines)
- › Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- › Electronic controller managing both temperature and humidity of the cold room



Installation type

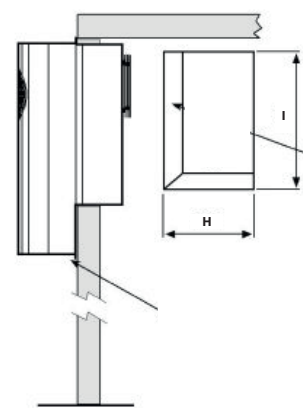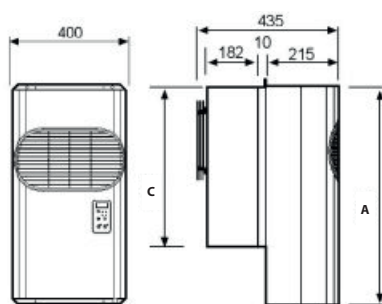

More details and final information can be found by scanning or clicking the QR codes.



	RCV103EA12S3	RCV105EA12S3	RCV206EA12S3	RCV207EA12S3
Refrigerant	R134a			
Power supply V/Ph~/Hz	220-230/1N~/50			
HP compressor	1/3	3/8	1/2	3/4
PED category	0			
Working temperature °C	+20 ÷ +10			
Range RH %	60-80			
Cooling capacity [TC=10°C TA=30°C] Watt	593	912	1,336	1,935



Bi-block system for wine application

Compact condensing unit and small-sized wall or ceiling mounted evaporators

- › Accurate humidity and temperature control to guarantee the quality of products (e.g. wines)
- › Thermostatic expansion valve ensuring optimum capacity in accordance with the required load for better energy efficiency
- › Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- › Electronic controller managing both temperature and humidity of the cold room



Installation type

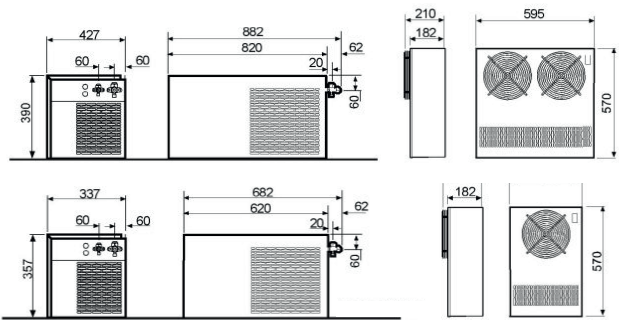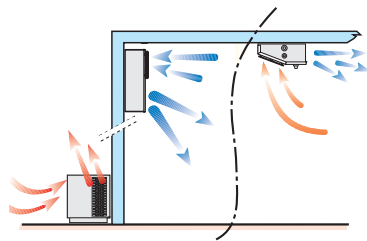

More details and final information can be found by scanning or clicking the QR codes.



RDV

		SB.RDV103EA12S3	SB.RDV105EA12S3	SB.RDV206EA12S3	SB.RDV207EA12S3	SB.RDV103EA12S7	SB.RDV105EA12S7	SB.RDV206EA12S7	SB.RDV207EA12S7
Refrigerant		R134a				R134a			
Power supply	V/Ph~/Hz	220-230/1N~/50				220-230/1N~/50			
HP compressor		1/3	3/8	1/2	3/4	1/3	3/8	1/2	3/4
Evaporator type		Wall mounting evaporator				Ceiling mounting evaporator			
PED category		1				1			
Working temperature	°C	+20 ÷ +10				+20 ÷ +10			
Range RH	%	60-80				60-80			
Cooling capacity	Watt	593	912	1,336	1,935	593	912	1,336	1,935
[TC=10°C TA=30°C]									



Drying and ageing units

INTRODUCTION

WHAT'S NEW

TOOLS AND
PLATFORMS

PLUG AND PLAY
SOLUTIONS FOR COLD
ROOMS AND WINE ROOMS

DRYING AND
AGEING UNITS

CONDENSING UNITS

CO₂ CONDENSING
UNITS

MULTI-COMPRESSORS
PACKS AND RACKS

INTEGRATED
SOLUTIONS

EVAPORATORS

OPTIONS FOR ZEAS
AND CONVENI-PACK

Monoblock and bi-block units for drying and ageing of meat and cheese

For small and medium size coldrooms

- › Quick and easy installation
- › Low noise and vibration
- › Electronic control
- › Constant and detailed control of temperature and humidity level during operation
- › Compact and functional, with removable panels to allow easy access to internal components
- › More units available suitable for large coldrooms




SAS: Drying and ageing units for small and medium cold rooms

- › Coldroom temperature: **+10°C to +25°C**
- › Humidity: **till 60%**

SAR: Units for post-salting resting of hams for small and medium cold rooms

- › Coldroom temperature: **+2°C to +4°C**
- › Humidity: **till 40%**

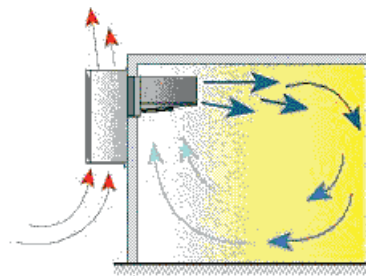

Cooling capacity :

- › from 2.900 to 18.500 Watt

	Monoblock units					Bi-block units				
SAR	SAR212DB13SM	SAR320DB13SM	SAR430DB13SM			SB.SAR212DB13SS	SB.SAR320DB13SS	SB.SAR430DB13SS		
Refrigerant	R134a					R134a				
Power supply	380-400/3N~/50					380-400/3N~/50				
HP compressor	1,5	2	4			1,5	2	4		
Defrost	Hot gas					Hot gas				
PED category	1		2			1		2		
Working temperature	+10 ÷ -5					+10 ÷ -5				
Range RH	40-60					40-60				
Cooling capacity	2,900	4,500	7,250			2,900	4,500	7,250		
[TC=10°C TA=30°C]										
	Monoblock units					Bi-block units				
SAS	SAS212EB10SM	SAS320EB10SM	SAS430EB10SM	SAS545EB10SM	SAS660EB10SM	SB.SAS212EB10SS	SB.SAS320EB10SS	SB.SAS430EB10SS	SB.SAS545EB10SS	SB.SAS660EB10SS
Refrigerant	R134a									
Power supply	380-400/3N~/50									
HP compressor	1	1.5	3	5	7.5	1	1.5	3	5	7.5
Drying	5	11	23	36	45	5	11	23	36	45
Drying	200	400	600	950	1,200	200	400	600	950	1,200
Ageing	20	40	70	125	160	20	40	70	125	160
Ageing	600	1,000	2,000	3,000	4,000	600	1,000	2,000	3,000	4,000
PED category	1		2			1		2		
Working temperature	+25 ÷ +10									
Range RH	60-80									
Cooling capacity	3,400	4,900	8,200	12,800	15,900	3,400	4,900	8,200	12,800	15,900
[TC=10°C TA=30°C]										

Air Handling Unit for industrial drying

The UAV series models are refrigeration units designed for drying cured meats, hams and cheeses with the need of temperature and relative humidity control in medium-large rooms for industrial applications. The operation range is from +25°C to +10°C while the achievable humidity range varies from 60% to 80%

- › Reproduction of customized drying and ageing cycles to guarantee the treatment of products in all seasons with any external climatic variation
- › Efficient air handling unit made of AISI 304 stainless steel
- › Equipped with removable panels for easy access to the components completely contained within the body
- › The units are precharged with refrigerant and complete with liquid receiver, taps, safety valve, filter drier and sight glass

Standard configuration

- › Hermetic compressor
- › Liquid Receiver
- › Safety valve
- › Liquid receiver shut off valves
- › Filter dryer
- › Sight glass
- › Four-pole condenser fan
- › Horizontal air flow remote condenser
- › Thermostatic expansion valve
- › Evaporator centrifugal fan
- › T duct for air distribution (galvanised sheet) complete with motorized flap
- › Air suction duct
- › Condensing unit with refrigerant charge
- › Electronic control board
- › Electronic thermostat for unit control
- › Switchboard with protection fuses
- › Thermal overload protection for compressor
- › Connection joints for air treatment unit/condenser
- › Adjustable calibration Hp switch with automatic reset
- › Adjustable calibration Lp switch with automatic reset
- › Condenser fan speed regulator with pressure control
- › Humidity control during dehumidification with heat recovery postheating
- › Temperature control with electrical heating
- › Humidity control with automatic water inlet
- › Crankcase heater
- › Fresh air intake

**For customized options,
please contact your sales representative.**




Air distribution systems with textile channels

The UAV industrial drying units are equipped with large and efficient evaporators with centrifugal fan, capable of generating air flow from 1.500 to 14.600m³/h.

This allows, thanks to the special galvanized sheet T-shaped ducts designed according to the room dimensions, an optimized distribution of the treated air in the room suitable for the required process.

The T-shaped ducts are complete with motorized damper.

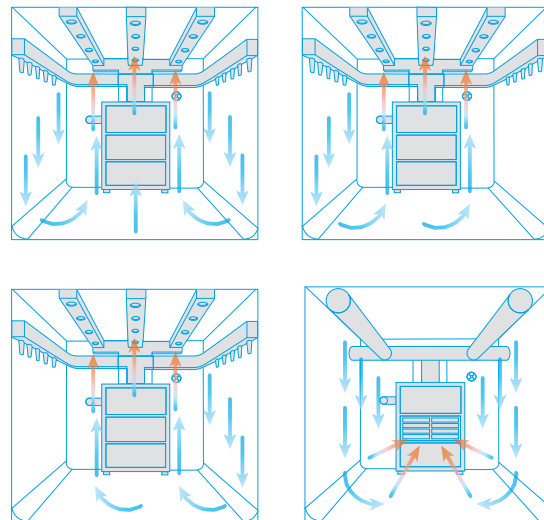

	SB.	SB.	SB.	SB.	SB.	SB.	SB.	SB.	SB.	SB.
	UAV002ER01B	UAV003ER01B	UAV004ER01B	UAV005ER01B	UAV007ER01B	UAV010ER01B	UAV015ER01B	UAV020ER01B	UAV025ER01B	UAV030ER01B
Refrigerant	R449A									
Power supply	V/Ph~/Hz									
HP compressor	2	3	4	5	7,5	10	15	20	25	30
Cold room volume	m ³	20	30	40	60	75	90	130	160	200
Product quantity	kg	400	800	1,200	1,600	2,000	2,400	3,200	4,800	8,000
PED category	2									
Working temperature	°C									
Range RH	%									
Cooling capacity	Watt									
[TC=10°C TA=30°C]	7,200	10,600	13,000	14,400	27,000	33,000	38,000	45,500	59,000	68,000

Air handling units for industrial ageing

The USV series models are refrigeration units designed for seasoning processes of cured meats and hams and for treating cheeses with the need of temperature and relative humidity control in medium-large rooms for industrial applications. The operation range is from +25°C to +10°C while the achievable humidity range varies from 60% to 80%.

- › Reproduction of customized drying and ageing cycles, to guarantee the production in all seasons with any external climatic variation
- › Efficient air handling unit made of AISI 304 stainless steel
- › Equipped with removable panels for easy access to the components completely contained within the body
- › The units are precharged with refrigerant and complete with liquid receiver, taps, safety valve, filter drier and sight glass

Standard configuration

- › Hermetic compressor
- › Liquid Receiver
- › Safety valve
- › Liquid receiver shut off valves
- › Filter dryer
- › Sight glass
- › Four-pole condenser fan
- › Horizontal air flow remote condenser
- › Thermostatic expansion valve
- › Evaporator centrifugal fan
- › T duct for air distribution (galvanised sheet) complete with motorized flap
- › Air suction duct
- › Condensing unit with refrigerant charge
- › Electronic control board
- › Electronic thermostat for unit control
- › Switchboard with protection fuses
- › Thermal overload protection for compressor
- › Connection joints for air treatment unit/condenser
- › Adjustable calibration Hp switch with automatic reset
- › Adjustable calibration Lp switch with automatic reset
- › Condenser fan speed regulator with pressure control
- › Humidity control during dehumidification with heat recovery postheating
- › Temperature control with electrical heating
- › Humidity control with automatic water inlet
- › Crankcase heater
- › Fresh air intake

For customized options, please contact your sales representative.




Air distribution systems with textile channels

The USV industrial drying units are equipped with large and efficient evaporators with centrifugal fan, capable of generating air flow from 1.500 to 14.600m³/h.

This allows, thanks to the special galvanized sheet T-shaped ducts designed according to the room dimensions, an optimized distribution of the treated air in the room suitable for the required process.

The T-shaped ducts are complete with motorized damper.

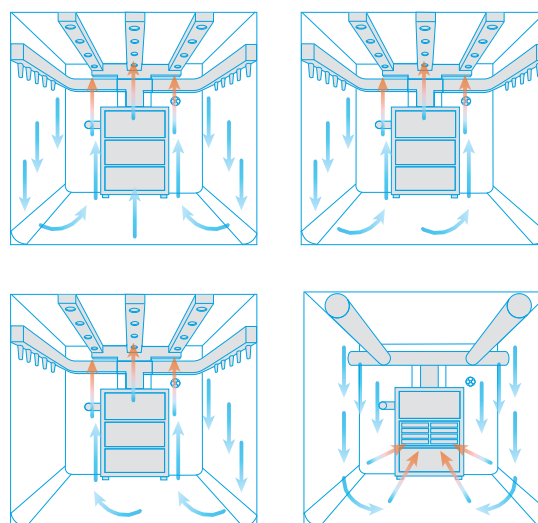

	SB.	SB.	SB.	SB.	SB.	SB.	SB.	SB.	SB.	SB.
	USV002ER01B	USV003ER01B	USV004ER01B	USV005ER01B	USV007ER01B	USV010ER01B	USV015ER01B	USV020ER01B	USV025ER01B	USV030ER01B
Refrigerant	R449A									
Power supply	V/Ph~/Hz 380-400/3N~/50									
HP compressor	2	3	4	5	7,5	10	15	20	25	30
Cold room volume	m ³ 75	90	120	180	225	240	390	490	550	680
Product quantity	kg 1,200	2,400	3,600	5,400	7,200	9,000	10,800	14,400	19,200	24,000
PED category	2									
Working temperature	°C +25 ÷ +10									
Range RH	% 60-80									
Cooling capacity [TC=10°C TA=30°C]	Watt 7,200	10,600	13,000	14,400	27,000	33,000	38,000	45,500	59,000	68,000



Condensing units

INTRODUCTION

WHAT'S NEW

TOOLS AND PLATFORMS

PLUG AND PLAY SOLUTIONS FOR COLD ROOMS AND WINE ROOMS

DRYING AND AGEING UNITS

CONDENSING UNITS

CO₂ CONDENSING UNITS

MULTI-COMPRESSORS PACKS AND RACKS

INTEGRATED SOLUTIONS

EVAPORATORS

OPTIONS FOR ZEAS AND CONVENI-PACK

Condensing unit for commercial refrigeration with reciprocating technology

Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



More details and final information can be found by scanning or clicking the QR codes.



JEHCCU-CM3



JEHCCU-CM1

Medium Temperature Refrigeration			JEHCCU-CM1/CM3													
Refrigerating capacity	Medium temperature (t)		R-134a	R-407A	R-407F	R-448A	R-449A	R-452A	R-134a	R-407A	R-407F	R-448A	R-449A	R-452A	R-134a	R-407A
		Nom	kW	0.59	-	0.89	1.06	-	-	1.29	1.60	-	-	-	-	-
		Nom	kW	-	0.80	-	-	1.07	-	-	-	1.33	1.66	1.92	-	1.92
		Nom	kW	-	0.86	-	-	1.15	-	-	-	1.41	1.74	2.08	-	2.08
		Nom	kW	-	0.87	-	-	1.12	-	-	-	1.35	1.64	2.15	2.57	2.15
		Nom	kW	-	0.87	-	-	1.12	-	-	-	1.35	1.64	2.15	2.57	2.15
		Nom	kW	-	0.95	-	-	1.23	-	-	-	1.48	1.79	2.20	2.69	2.20
		Nom	kW	-	-	-	-	-	-	-	-	-	-	-	-	-
Seasonal energy performance ratio SEPR	R-134a	Te -10°C		1.50	-	1.77	1.77	-	1.85	1.86	-	1.66	1.78	1.74	-	1.66
	R-407A	Te -10°C		-	1.59	-	-	1.62	-	-	-	1.77	1.85	1.93	-	1.85
	R-407F	Te -10°C		-	1.77	-	-	1.76	-	-	-	1.64	1.71	2.09	1.73	2.00
	R-448A	Te -10°C		-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00
	R-449A	Te -10°C		-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00
	R-452A	Te -10°C		-	1.67	-	-	1.67	-	-	-	1.68	1.73	1.92	1.65	1.83
Parameters at full load and ambient temp. 25°C	R-134a	Te -10°C	Declared COP (COP2)	1.84	-	2.01	2.05	-	2.22	2.30	-	1.74	1.90	1.87	-	2.09
	R-407A	Te -10°C	Declared COP (COP2)	-	1.69	-	-	1.69	-	-	-	1.95	2.07	2.22	-	1.78
	R-407F	Te -10°C	Declared COP (COP2)	-	1.93	-	-	1.94	-	-	-	1.89	1.95	2.42	1.93	2.11
	R-448A	Te -10°C	Declared COP (COP2)	-	1.91	-	-	1.90	-	-	-	1.89	1.95	2.42	1.93	2.32
	R-449A	Te -10°C	Declared COP (COP2)	-	1.91	-	-	1.90	-	-	-	1.89	1.95	2.42	1.93	2.32
	R-452A	Te -10°C	Declared COP (COP2)	-	1.90	-	-	1.90	-	-	-	1.90	1.98	2.18	1.85	2.32
Parameters at full load and ambient temp. 32°C (Point A)	R-134a	Te -10°C	Rated COP (COPA)	1.5	-	1.77	1.77	-	1.85	1.86	-	1.66	1.78	1.74	-	1.66
	R-407A	Te -10°C	Rated COP (COPA)	-	1.59	-	-	1.62	-	-	-	1.77	1.85	1.93	-	1.85
	R-407F	Te -10°C	Rated COP (COPA)	-	1.77	-	-	1.76	-	-	-	1.64	1.71	2.09	1.73	2.00
	R-448A	Te -10°C	Rated COP (COPA)	-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00
	R-449A	Te -10°C	Rated COP (COPA)	-	1.66	-	-	1.64	-	-	-	1.64	1.71	2.09	1.73	2.00
	R-452A	Te -10°C	Rated COP (COPA)	-	1.67	-	-	1.67	-	-	-	1.68	1.73	1.92	1.65	1.83
	R-134a	Te -10°C	Rated cooling capacity (PA)	kW	0.59	-	0.89	1.06	-	1.29	1.60	-	-	-	-	-
	R-407A	Te -10°C	Rated cooling capacity (PA)	kW	-	0.80	-	-	1.07	-	-	1.33	1.66	1.92	-	1.92
	R-407F	Te -10°C	Rated cooling capacity (PA)	kW	-	0.86	-	-	1.15	-	-	1.41	1.74	2.08	-	2.08
	R-448A	Te -10°C	Rated cooling capacity (PA)	kW	-	0.87	-	-	1.12	-	-	1.35	1.64	2.15	2.57	2.15
	R-449A	Te -10°C	Rated cooling capacity (PA)	kW	-	0.87	-	-	1.12	-	-	1.35	1.64	2.15	2.57	2.15
	R-452A	Te -10°C	Rated cooling capacity (PA)	kW	-	0.95	-	-	1.23	-	-	1.48	1.79	2.20	2.69	2.20
	R-134a	Te -10°C	Rated power input (DA)	kW	0.39	-	0.50	0.60	-	0.70	0.86	-	-	-	-	-
	R-407A	Te -10°C	Rated power input (DA)	kW	-	0.50	-	-	0.66	-	-	0.80	0.94	1.11	-	1.16
	R-407F	Te -10°C	Rated power input (DA)	kW	-	0.49	-	-	0.65	-	-	0.79	0.94	1.07	-	1.12
	R-448A	Te -10°C	Rated power input (DA)	kW	-	0.53	-	-	0.68	-	-	0.82	0.96	1.03	1.49	1.08
	R-449A	Te -10°C	Rated power input (DA)	kW	-	0.53	-	-	0.68	-	-	0.82	0.96	1.03	1.49	1.08
	R-452A	Te -10°C	Rated power input (DA)	kW	-	0.57	-	-	0.74	-	-	0.88	1.03	1.15	1.63	1.20
Parameters at full load and ambient temp. 43°C	R-134a	Te -10°C	Declared COP (COP3)	1.42	-	1.40	1.40	-	1.49	1.50	-	-	-	-	-	-
	R-407A	Te -10°C	Declared COP (COP3)	-	1.42	-	-	-	-	-	-	-	-	-	-	-
	R-407F	Te -10°C	Declared COP (COP3)	-	1.46	-	-	-	-	-	-	-	-	-	-	-
	R-448A	Te -10°C	Declared COP (COP3)	-	1.27	-	-	1.26	-	-	-	1.25	1.33	1.62	1.42	1.53
	R-449A	Te -10°C	Declared COP (COP3)	-	1.27	-	-	1.26	-	-	-	1.25	1.33	1.62	1.42	1.53
	R-452A	Te -10°C	Declared COP (COP3)	-	1.31	-	-	1.32	-	-	-	1.34	1.37	1.52	1.35	1.44
	R-134a	Te -10°C	Cooling capacity (P3)	kW	-	0.75	0.86	-	1.06	1.34	-	-	-	-	-	-
	R-407A	Te -10°C	Cooling capacity (P3)	kW	-	0.75	-	-	-	-	-	-	-	-	-	-
	R-407F	Te -10°C	Cooling capacity (P3)	kW	-	0.79	-	-	-	-	-	-	-	-	-	-
	R-448A	Te -10°C	Cooling capacity (P3)	kW	-	0.73	-	0.91	-	-	-	1.10	1.34	1.79	2.23	1.77
	R-449A	Te -10°C	Cooling capacity (P3)	kW	-	0.73	-	0.91	-	-	-	1.10	1.34	1.79	2.23	1.77
	R-452A	Te -10°C	Cooling capacity (P3)	kW	-	0.80	-	1.01	-	-	-	1.23	1.46	1.83	2.28	1.81
	R-134a	Te -10°C	Power input (D3)	kW	0.36	-	0.53	0.62	-	0.71	0.89	-	-	-	-	-
	R-407A	Te -10°C	Power input (D3)	kW	-	0.53	-	-	-	-	-	-	-	-	-	-
	R-407F	Te -10°C	Power input (D3)	kW	-	0.54	-	-	-	-	-	-	-	-	-	-
	R-448A	Te -10°C	Power input (D3)	kW	-	0.58	-	0.73	-	-	-	0.88	1.01	1.11	1.57	1.16
	R-449A	Te -10°C	Power input (D3)	kW	-	0.58	-	0.73	-	-	-	0.88	1.01	1.11	1.57	1.16
	R-452A	Te -10°C	Power input (D3)	kW	-	0.61	-	0.77	-	-	-	0.92	1.06	1.20	1.69	1.26
Dimensions	Unit	HeightxWidthxDepth	mm	607x876x420												662x1,101x444
Weight	Unit		kg	49	-	57	-	56	-	58	-	57	-	58	-	67
Compressor	Type			Reciprocating compressor												
	Piston displacement	m ³ /h		1.8	-	3.18	-	2.64	-	4.51	-	3.18	-	4.21	-	4.52
Fan	Type			Axial												
Sound pressure level	Nom.		dBA	28												32
Piping connections	Liquid line connection	inch		1/4"												3/8"
	Suction line connection	inch		3/8"												5/8"
Refrigerant	Type/GWP			R-134a/1,430	R-452A/2,141	R-134a/1,430	R-452A/2,141	R-134a/1,430	R-452A/2,141	R-407A/2,107	R-407F/1,825	R-448A/1,387	R-449A/1,397	R-452A/2,141	R-407A/2,107	R-448A/1,387
	Type 2 - GWP Type 2			-	-	-	-	-	-	-	-	-	-	-	-	-
	Type 3 - GWP Type 3			-	-	-	-	-	-	-	-	-	-	-	-	-
	Type 4 - GWP Type 4			-	-	-	-	-	-	-	-	-	-	-	-	-
	Type 5 - GWP Type 5			-	-	-	-	-	-	-	-	-	-	-	-	-
	GWP Type 6			-	-	-	-	-	-	-	-	-	-	-	-	-
Power supply	Phase/Frequency/Voltage	Hz/V		1~50/230												3~50/400









(1) Refer to condition: Outside ambient temperature = 32°C, Evaporation temperature = -10°C and Return Gas 20°C (medium temperature application) | (2) Average sound pressure level is measured at 10m in anechoic room

Condensing unit for commercial refrigeration with scroll technology

Refrigeration solution for small food retailers

- Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- Compact and lightweight for even the smallest of city centre locations
- All components can be accessed, making maintenance quick and easy
- Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



Medium Temperature Refrigeration				JEHSCU-CM1/CM3		0200CM1	0250CM1	0300CM1	0200CM3	0250CM3	0300CM3	0350CM3	0360CM3	0400CM3	0500CM3	0600CM3	0680CM3	0800CM3	1000CM3										
Refrigerating capacity		Medium temperature (t)		R-134a	Nom	kW	2.13	-	-	2.24	-	-	3.48	3.80	4.37	-	-	-	8.21	10.75									
				R-407A	Nom	kW	3.48	4.09	-	3.45	4.05	4.69	-	5.77	6.76	8.28	9.54	10.7	12.95	-									
				R-407F	Nom	kW	3.33	3.82	4.63	3.33	3.94	4.58	-	5.73	6.75	8.18	9.59	-	12.9	-									
				R-407H	Nom	kW	-	-	-	3.30	3.76	4.51	-	-	5.96	-	9.24	10.3	12.3	-									
				R-448A	Nom	kW	3.33	3.82	4.73	3.33	3.82	4.73	5.46	5.76	6.37	7.88	9.45	10.5	12.8	15.85									
				R-449A	Nom	kW	3.33	3.82	4.73	3.33	3.82	4.73	5.46	5.76	6.37	7.88	9.45	10.5	12.8	15.85									
 Seasonal energy performance ratio SEPR	R-134a	Te -10°C					1.92	-	-	2.19	-	-	2.08	2.36	2.36	-	-	-	3.10	3.37									
	R-407A	Te -10°C					2.18	2.06	-	2.12	1.99	1.92	-	3.48	3.79	3.21	3.19	2.96	3.12	-									
	R-407F	Te -10°C					1.92	1.83	1.74	1.88	1.83	1.69	-	3.22	3.49	3.07	3.12	-	2.95	-									
	R-407H	Te -10°C					-	-	-	1.93	2.02	1.80	-	3.15	3.03	-	2.90	2.68	3.24	-									
	R-448A	Te -10°C					2.02	1.93	1.85	2.02	1.93	1.85	2.72	3.02	3.13	2.97	3.22	2.96	2.88	2.83									
	R-449A	Te -10°C					2.02	1.93	1.85	2.02	1.93	1.85	2.72	3.02	3.13	2.97	3.22	2.96	2.88	2.83									
 Annual electricity consumption Q	R-134a	Te -10°C							-	-	-	-		10,187	10,973	15,848	18,408	22,240	16,257	19,586									
	R-407A	Te -10°C							-	-	-	-		10,933	11,873	16,401	18,903	-	26,882	-									
	R-407F	Te -10°C							-	-	-	-		10,664	12,082	-	19,576	23,664	-	-									
	R-407H	Te -10°C							-	-	-	-																	
	R-448A	Te -10°C							-	-	-	12,363	11,736	12,512	16,305	18,395	22,298	27,302	34,432										
	R-449A	Te -10°C							-	-	-	12,363	11,736	12,512	16,305	18,395	22,298	27,302	34,432										
 Parameters at full load and ambient temp. 25°C	R-134a	Te -10°C	Declared COP (COP2)				2.21	-	-	2.62	-	-	2.46	2.86	2.90	-	-	-	-	-									
	R-407A	Te -10°C	Declared COP (COP2)				2.61	2.44	-	2.55	2.36	2.26	-	-	-	-	-	-	-	-									
	R-407F	Te -10°C	Declared COP (COP2)				2.46	2.33	2.21	2.39	2.29	2.14	-	-	-	-	-	-	-	-									
	R-407H	Te -10°C	Declared COP (COP2)				-	-	-	2.37	2.48	2.21	-	-	-	-	-	-	-	-									
	R-448A	Te -10°C	Declared COP (COP2)				2.53	2.32	2.23	2.53	2.32	2.23	-	-	-	-	-	-	-	-									
	R-449A	Te -10°C	Declared COP (COP2)				2.53	2.32	2.23	2.53	2.32	2.23	-	-	-	-	-	-	-	-									
 Parameters at part load and ambient temp. 25°C (Point B)	R-134a	Te -10°C	Declared COP (COPB)						-	-	-	-						2.49	2.7										
	R-407A	Te -10°C	Declared COP (COPB)						-	-	-	-		2.77	2.90	2.60	2.51	2.37	2.55	-									
	R-407F	Te -10°C	Declared COP (COPB)						-	-	-	-		2.53	2.66	2.36	2.39	-	2.5	-									
	R-407H	Te -10°C	Declared COP (COPB)						-	-	-	-		2.47	2.37	-	2.32	2.17	2.68	-									
	R-448A	Te -10°C	Declared COP (COPB)						-	-	-	-		2.18	2.56	2.51	2.41	2.39	2.18	2.33									
	R-449A	Te -10°C	Declared COP (COPB)						-	-	-	-		2.18	2.56	2.51	2.41	2.39	2.18	2.33									
 Parameters at full load and ambient temp. 32°C (Point A)	R-134a	Te -10°C	Rated COP (COPA)				1.92	-	-	2.19	-	-	2.08	2.36	2.36	-	-	-	2.2	2.21									
	R-407A	Te -10°C	Rated COP (COPA)				2.18	2.06	-	2.12	1.99	1.92	-	2.24	2.28	2.11	2.05	1.93	2.08	-									
	R-407F	Te -10°C	Rated COP (COPA)				1.92	1.83	1.74	1.88	1.83	1.69	-	1.97	2.10	1.88	1.91	-	2.1	-									
	R-407H	Te -10°C	Rated COP (COPA)				-	-	-	1.93	2.02	1.80	-	-	1.89	-	1.92	1.78	2.2	-									
	R-448A	Te -10°C	Rated COP (COPA)				2.02	1.93	1.85	2.02	1.93	1.85	1.77	2.04	1.98	1.78	1.96	1.79	2.05	1.83									
	R-449A	Te -10°C	Rated COP (COPA)				2.02	1.93	1.85	2.02	1.93	1.85	1.77	2.04	1.98	1.78	1.96	1.79	2.05	1.83									
 Parameters at full load and ambient temp. 43°C	R-134a	Te -10°C	Rated cooling capacity (PA)			kW	2.13	-	-	2.24	-	-	3.48	3.80	4.37	-	-	-	8.21	10.75									
	R-407A	Te -10°C	Rated cooling capacity (PA)			kW	3.48	4.09	-	3.45	4.05	4.69	-	5.77	6.76	8.28	9.54	10.7	12.95	-									
	R-407F	Te -10°C	Rated cooling capacity (PA)			kW	3.33	3.82	4.63	3.33	3.94	4.58	-	5.73	6.75	8.18	9.59	-	12.9	-									
	R-407H	Te -10°C	Rated cooling capacity (PA)			kW	-	-	-	3.30	3.76	4.51	-	-	5.96	-	9.24	10.3	12.3	-									
	R-448A	Te -10°C	Rated cooling capacity (PA)			kW	3.33	3.82	4.73	3.33	3.82	4.73	5.46	5.76	6.37	7.88	9.45	10.5	12.8	15.85									
	R-449A	Te -10°C	Rated cooling capacity (PA)			kW	3.33	3.82	4.73	3.33	3.82	4.73	5.46	5.76	6.37	7.88	9.45	10.5	12.8	15.85									
	R-134a	Te -10°C	Rated power input (DA)			kW	1.11	-	-	1.03	-	-	1.68	1.61	1.85	-	-	-	3.74	4.86									
	R-407A	Te -10°C	Rated power input (DA)			kW	1.60	1.99	-	1.63	2.04	2.45	-	2.58	2.97	3.93	4.65	5.54	6.24	-									
	R-407F	Te -10°C	Rated power input (DA)			kW	1.74	2.09	2.66	1.78	2.16	2.71	-	2.91	3.21	4.36	5.03	-	6.13	-									
	R-407H	Te -10°C	Rated power input (DA)			kW	-	-	-	1.71	1.86	2.50	-	-	3.15	-	4.82	5.79	5.58	-									
	R-448A	Te -10°C	Rated power input (DA)			kW	1.65	1.98	2.56	1.65	1.98	2.56	3.09	2.83	3.22	4.43	4.83	5.85	6.23	8.68									
	R-449A	Te -10°C	Rated power input (DA)			kW	1.65	1.98	2.56	1.65	1.98	2.56	3.09	2.83	3.22	4.43	4.83	5.85	6.23	8.68									
	R-134a	Te -10°C	Declared COP (COP3)				1.42	-	-	-	-	-	1.52	-	-	-	-	-	1.59	1.60									
	R-448A	Te -10°C	Declared COP (COP3)				1.31	1.36	1.31	1.31	1.36	1.31	1.26	1.41	1.37	1.24	1.42	1.32	-	-									
	R-449A	Te -10°C	Declared COP (COP3)				1.31	1.36	1.31	1.31	1.36	1.31	1.26	1.41	1.37	1.24	1.42	1.32	-	-									
	R-134a	Te -10°C	Cooling capacity (P3)			kW	1.87	-	-	-	-	-	3.06	-	-	-	-	-	7.26	9.46									
	R-448A	Te -10°C	Cooling capacity (P3)			kW	2.80	3.35	4.12	2.80	3.35	4.12	4.78	4.99	5.57	6.79	8.29	9.25	-	-									
	R-449A	Te -10°C	Cooling capacity (P3)			kW	2.80	3.35	4.12	2.80	3.35	4.12	4.78	4.99	5.57	6.79	8.29	9.25	-	-									
R-134a	Te -10°C	Power input (D3)			kW	1.32	-	-	-	-	-	2.02	-	-	-	-	-	4.56	5.92										
R-448A	Te -10°C	Power input (D3)			kW	2.14	2.47	3.14	2.14	2.47	3.14	3.78	3.54	4.08	5.46	5.82	7.00	-	-										
R-449A	Te -10°C	Power input (D3)			kW	2.14	2.47	3.14	2.14	2.47	3.14	3.78	3.54	4.08	5.46	5.82	7.00	-	-										
 Parameters at part load and ambient temp. 15°C (Point C)	R-134a	Te -10°C	Declared COP (COPC)				-	-	-	-	-	-	3.71	4.02	3.43	-	-	3.26	3.58										
	R-407A	Te -10°C	Declared COP (COPC)				-	-	-	-	-	-	3.46	3.69	3.24	3.35	3.13	3.34	-										
	R-407F	Te -10°C	Declared COP (COPC)				-	-	-	-	-	-	3.34	3.22	-	3.3	-	3.14	-										
	R-407H	Te -10°C	Declared COP (COPC)				-	-	-	-	-	-	3.18	3.34	3.20	3.06	2.84	3.47	-										
	R-448A	Te -10°C	Declared COP (COPC)				-	-	-	-	-	-	2.88	3.18	3.34	3.20	3.15	2.85	3.02										
	R-449A	Te -10°C	Declared COP (COPC)				-	-	-	-	-	-	2.88	3.18	3.34	3.20	3.15	2.85	3.26										
 Parameters at part load and ambient temp. 5°C (Point D)	R-134a	Te -10°C	Declared COP (COPD)				-	-	-	-	-	-	4.85	5.41	4.40	-	-	4.25	4.66										
	R-407A	Te -10°C	Declared COP (COPD)				-	-	-	-	-	-	4.48	5.05	4.43	4.49	4.1	4.25	-										
	R-407F	Te -10°C	Declared COP (COPD)				-	-	-	-	-	-	4.45	4.3	-	4.5	-	3.90	-										
	R-407H	Te -10°C	Declared COP (COPD)				-	-	-	-	-	-	4.05	4.32	4.12	4.03	3.67	4.36	-										
	R-448A	Te -10°C	Declared COP (COPD)				-	-	-	-	-	-	3.77	-	-	4.05	3.68	3.92	3.96										
	R-449A	Te -10°C	Declared COP (COPD)				-	-	-	-	-	-	3.77	-	-	4.05	3.68	3.92	3.96										
Dimensions	Unit	HeightxWidthxDepth			mm	662 x1,101 x444										872 x1,353 x575										1,727 x1,348 x641			
Weight	Unit				kg	70	72	74	70	72	74	74	74	112	119	123	125	126	222	226									
Compressor	Type					Reciprocating compressor										Scroll compressor										Reciprocating compressor			
						Piston displacement										Axial													
Fan	Type				m³/h	5.9	6.8	8.6	5.9	6.8	8.6	9.9	9.9	11.4	14.4	17.1	18.8	22.1	29.1										
Sound pressure level	Nom.				dBA	33	34	36	33	34	36	39	37	37	38	40	40	43	43										
Piping connections	Liquid line connection				inch	3/8"										1/2"										3/4"			
	Suction line connection				inch	3/4"										7/8"										1 1/8"		1 3/8"	
Refrigerant	Type/GWP					R-134a/1,430	R-407A/2,107	R-407A/2,107	R-134a/1,430	R-407A/2,107	R-407A/2,107	R-134a/1,430.0	3/4"		7/8"		1 1/8"		1 3/8"										
	Type 2 - GWP Type 2					R-407A/2,107	R-407F/1,825	R-448A/1,387	R-407A/2,107	R-407F/1,825	R-407F/1,825	-	R-407A/2,107		R-407A/2,107		R-407F/1,825		R-407H/1,495.0										
	Type 3 - GWP Type 3					R-407F/1,825	R-448A/1,387	R-449A/1,397</																					

Condensing unit for commercial refrigeration with scroll / reciprocating technology

Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



Low Temperature Refrigeration				JEHCCU-CL1/JEHSCU-CL3	0115CL1	0135CL1	0180CL3	0210CL3	0300CL3	0400CL3	0500CL3	0600CL3	0750CL3	0950CL3 EVI
Refrigerating capacity	Medium temperature (1)	R-407A	Nom	kW	-	-	-	-	-	2.29	2.77	3.31	4.29	4.96
		R-407F	Nom	kW	-	-	-	-	-	2.38	2.87	-	-	4.88
		R-448A	Nom	kW	-	-	0.98	1.36	1.62	2.53	-	3.49	4.81	4.86
		R-449A	Nom	kW	-	-	0.98	1.36	1.62	2.53	-	-	-	4.86
		R-452A	Nom	kW	0.64	0.81	1.13	1.53	-	-	-	-	-	-
Seasonal energy performance ratio SEPR	R-407A	Te -35°C			-	-	-	-	-	1.67	1.67	1.64	-	1.76
	R-407F	Te -35°C			-	-	-	-	-	1.65	1.64	-	-	1.63
	R-448A	Te -35°C			-	1.00	1.00	0.97	1.67	-	-	1.64	1.64	1.76
	R-449A	Te -35°C			-	1.00	1.00	0.97	1.67	-	-	1.64	1.64	1.76
	R-452A	Te -35°C			1.05	0.98	1.07	1.05	-	-	-	-	-	-
Annual electricity consumption Q	R-407A	Te -35°C		kWh/a	-	-	-	-	-	10,212	12,364	15,026	-	20,958
	R-407F	Te -35°C		kWh/a	-	-	-	-	-	10,730	13,018	-	-	22,348
	R-448A	Te -35°C		kWh/a	-	-	-	-	-	11,276	-	15,878	21,856	20,551
	R-449A	Te -35°C		kWh/a	-	-	-	-	-	11,276	-	15,878	21,856	20,551
	R-452A	Te -35°C		kWh/a	-	-	-	-	-	-	-	-	-	-
Parameters at full load and ambient temp. 25°C	R-448A	Te -35°C	Declared COP (COP2)		-	1.15	1.09	1.16	-	-	-	-	-	-
	R-449A	Te -35°C	Declared COP (COP2)		-	1.15	1.09	1.16	-	-	-	-	-	-
	R-452A	Te -35°C	Declared COP (COP2)		1.20	1.15	1.26	1.25	-	-	-	-	-	-
Parameters at part load and ambient temp. 25°C (Point B)	R-407A	Te -35°C	Declared COP (COPB)		-	-	-	-	1.24	1.25	1.35	-	-	1.51
	R-407F	Te -35°C	Declared COP (COPB)		-	-	-	-	1.23	1.23	-	-	-	1.35
	R-448A	Te -35°C	Declared COP (COPB)		-	-	-	-	1.30	-	1.29	1.43	1.42	1.42
	R-449A	Te -35°C	Declared COP (COPB)		-	-	-	-	1.30	-	1.29	1.43	1.42	1.42
Parameters at full load and ambient temp. 32°C (Point A)	R-407A	Te -35°C	Rated COP (COPA)		-	-	-	-	0.98	0.97	0.93	1.03	1.03	1.26
	R-407F	Te -35°C	Rated COP (COPA)		-	-	-	-	0.95	0.93	-	-	-	1.08
	R-448A	Te -35°C	Rated COP (COPA)		-	1.00	1.00	0.97	1.02	-	0.83	1.18	1.24	1.24
	R-449A	Te -35°C	Rated COP (COPA)		-	1.00	1.00	0.97	1.02	-	0.83	1.18	1.24	1.24
	R-452A	Te -35°C	Rated COP (COPA)		1.05	0.98	1.08	1.05	-	-	-	-	-	-
Parameters at full load and ambient temp. 43°C	R-407A	Te -35°C	Rated cooling capacity (PA)	kW	-	-	-	-	2.29	2.77	3.31	4.29	4.96	4.96
	R-407F	Te -35°C	Rated cooling capacity (PA)	kW	-	-	-	-	2.38	2.87	-	-	-	4.88
	R-448A	Te -35°C	Rated cooling capacity (PA)	kW	-	0.98	1.36	1.62	2.53	-	3.49	4.81	4.86	4.86
	R-449A	Te -35°C	Rated cooling capacity (PA)	kW	-	0.98	1.36	1.62	2.53	-	3.49	4.81	4.86	4.86
	R-452A	Te -35°C	Rated cooling capacity (PA)	kW	0.64	0.81	1.13	1.53	-	-	-	-	-	-
	R-407A	Te -35°C	Rated power input (DA)	kW	-	-	-	-	2.33	2.85	3.57	4.17	3.94	3.94
	R-407F	Te -35°C	Rated power input (DA)	kW	-	-	-	-	2.51	3.08	-	-	-	4.51
	R-448A	Te -35°C	Rated power input (DA)	kW	-	0.98	1.36	1.67	2.48	-	4.19	4.08	3.93	3.93
	R-449A	Te -35°C	Rated power input (DA)	kW	-	0.98	1.36	1.67	2.48	-	4.19	4.08	3.93	3.93
	R-452A	Te -35°C	Rated power input (DA)	kW	0.61	0.83	1.06	1.47	-	-	-	-	-	-
	R-407A	Te -35°C	Declared COP (COP3)		-	-	-	-	0.67	0.66	0.64	0.73	-	-
Parameters at part load and ambient temp. 15°C (Point C)	R-407F	Te -35°C	Declared COP (COP3)		-	-	-	-	0.62	-	-	-	-	-
	R-448A	Te -35°C	Declared COP (COP3)		-	-	-	-	0.68	-	0.46	0.81	-	-
	R-449A	Te -35°C	Declared COP (COP3)		-	-	-	-	0.68	-	0.46	0.81	-	-
	R-452A	Te -35°C	Declared COP (COP3)		0.82	0.71	-	-	0.68	-	-	-	-	-
	R-407A	Te -35°C	Cooling capacity (P3)	kW	-	-	-	-	2.01	2.40	2.88	3.79	-	-
Parameters at part load and ambient temp. 5°C (Point D)	R-407F	Te -35°C	Cooling capacity (P3)	kW	-	-	-	-	2.04	-	-	-	-	-
	R-448A	Te -35°C	Cooling capacity (P3)	kW	-	-	-	-	2.23	-	2.82	4.26	-	-
	R-449A	Te -35°C	Cooling capacity (P3)	kW	-	-	-	-	2.23	-	2.82	4.26	-	-
	R-452A	Te -35°C	Cooling capacity (P3)	kW	0.49	0.57	-	-	1.43	-	-	-	-	-
	R-407A	Te -35°C	Power input (D3)	kW	-	-	-	-	2.98	3.64	4.48	5.20	-	-
	R-407F	Te -35°C	Power input (D3)	kW	-	-	-	-	3.30	-	-	-	-	-
	R-448A	Te -35°C	Power input (D3)	kW	-	-	-	-	3.29	-	6.15	5.28	-	-
	R-449A	Te -35°C	Power input (D3)	kW	-	-	-	-	3.29	-	6.15	5.28	-	-
	R-452A	Te -35°C	Power input (D3)	kW	0.60	0.81	-	-	2.11	-	-	-	-	-
	R-407A	Te -35°C	Declared COP (COPD)		-	-	-	-	1.69	1.69	1.68	-	-	1.74
	R-407F	Te -35°C	Declared COP (COPD)		-	-	-	-	1.68	1.69	-	-	-	1.67
	R-448A	Te -35°C	Declared COP (COPD)		-	-	-	-	1.75	-	1.78	1.71	1.75	1.75
Dimensions	Unit	HeightxWidthxDepth	mm	607 x876 x420	606 x876 x430	-	662 x1,101 x444	-	-	872 x1,353 x575	-	1,727 x1,348 x605	-	-
	Weight		kg	55	61	83	81	78	132	132	133	203	200	200
	Compressor	Type		Reciprocating compressor										
		Piston displacement	m ³ /h	4.55	6	9.45	11.83	8	11.8	14.5	17.1	21.4	17.1	17.1
	Fan	Type		Axial										
Sound pressure level	Nom.		dBA	31	27	38	33	37	39	41	37	37	37	37
	Liquid line connection		inch	3/8"										
	Suction line connection		inch	1/2"										
Refrigerant	Type/GWP			R-404A/3,921,6	R-404A/3,922	R-448A/1,387	R-448A/1,387	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922	R-404A/3,922
	Type 2 - GWP Type 2			-	R-452A/2,141	R-449A/1,397	R-449A/1,397	R-449A/1,397	R-407A/2,107	R-407A/2,107	R-407A/2,107	R-448A/1,387	R-407A/2,107	R-407A/2,107
	Type 3 - GWP Type 3			-	-	R-452A/2,141	R-452A/2,141	-	R-407F/1,825	R-407F/1,825	R-449A/1,397	R-449A/1,397	R-407F/1,825	R-407F/1,825
	Type 4 - GWP Type 4			-	-	-	-	-	R-448A/1,387	-	-	-	R-448A/1,387	R-448A/1,387
	Type 5 - GWP Type 5			-	-	-	-	-	R-449A/1,397	-	-	-	R-449A/1,397	R-449A/1,397
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /230										
				3~/50 /400										

1) Refer to condition: Outside ambient temperature = 32°C, Evaporation temperature = -35°C and Return Gas 20°C (low temperature application) | (2) Average sound pressure level is measured at 10m in anechoic room |

* Condition with high discharge temperature



INTRODUCTION
WHAT'S NEW
TOOLS AND PLATFORMS
PLUG AND PLAY SOLUTIONS FOR COLD ROOMS AND WINE ROOMS
DRYING AND AGEING UNITS
CONDENSING UNITS
CO ₂ CONDENSING UNITS
MULTI-COMPRESSORS PACKS AND RACKS
INTEGRATED SOLUTIONS
EVAPORATORS
OPTIONS FOR ZEAS AND CONVENI-PACK

Condensing units with inverter driven compressor

High reliability, low cost and easy installation

- › Evaporating working temperatures from +5°C to -20°C
- › Power control box with magnetothermic switches
- › Thermal protection
- › Electronic controller (Dixell)
- › Inverter driven compressor
- › Power supply 380-400/3N~/50
- › Oil separator
- › Condenser fans speed regulator with pressure probe
- › Liquid receiver with safety valve and liquid line
- › HP and LP pressure switches
- › Crankcase heater
- › Antivibration on suction and discharge line
- › Condenser with 6 poles axial fans
- › Condensing unit under nitrogen pressure
- › Condensation type: air with axial fan
- › Refrigerating system configuration: crankcase heater, pressure controlled condenser fan speed regulator, oil separator



- › Electrical box: power control box with thermal protection and capacity regulation
- › Soundproofing: double noise insulation (residential)

				GCI	GCI2010B381D4R	GCI2020B381D4R	GCI2022B381D4R	GCI2030B381D4R	GCI2040B381D4R	GCI3050B381D4R	GCI3060B381D4R	GCI4120B381D4R	
Frame type				2					3			4	
Power supply				V/ph~/Hz	380-400/3N~/50								
Max absorbed current (70Hz)				A	2.7	3.6	4.1	5.6	7.2	8.4	10.3	13.3	
Max absorbed power (70Hz)				kW	1.3	1.8	2.1	3.0	4.0	4.7	5.8	7.8	
Working temperature				°C	+5 ÷ -20								
Compressor	Type	Semihermetic											
	Brand	Bitzer											
	Model	2HES-1Y 2FES-2Y 2EES-2Y 2CES-3Y 4EES-4Y 4DES-5Y 4CES-6Y 4PES-12Y											
	Refrigerant	R134a											
Condenser	Fin pitch	mm	2.1										
	Fans nr.		1					2					
	Fans ø	mm	450										
	Model	ph/p	1ph-6P										
	Air flow	m3/h	2943					5850					5366
	Noise pressure level at 10 m (50Hz)	dB(A)	33	34	35	35	39	40	41	42			
	Suction	Ø mm	16	18	22	22	28	28	35	35			
	Liquid	Ø mm	10					12					
Connections	Standard liquid receiver	lt	5.7					10			21		
	PED category		1					2					
	Unit net weight	kg	160	170	193	195	210	225	230	300			
	Min./Max. Tev 5°C												
Cooling capacity	Tamb 20°C	kW	2.63/6.01	3.81/8.43	4.65/10.19	6.6/14.04	8.66/17.46	10.65/22.27	12.72/25.72	18.23/34.95			
	Tamb 25°C	kW	2.49/5.68	3.56/7.89	4.37/9.59	6.22/13.23	8.14/16.4	10/20.91	11.95/24.16	17.02/32.63			
	Tamb 30°C	kW	2.34/5.36	3.32/7.35	4.1/8.99	5.84/12.42	7.62/15.35	9.35/19.56	11.18/22.61	15.83/30.35			
	Tamb 35°C	kW	2.2/5.04	3.08/6.82	3.83/8.4	5.47/11.63	7.1/14.31	8.71/18.22	10.42/21.07	14.66/28.11			
	Tamb 40°C	kW	2.07/4.72	2.84/6.28	3.56/7.82	5.09/10.84	6.59/13.28	8.07/16.89	9.66/19.54	13.52/25.91			
	Tamb 45°C	kW	1.93/4.41	2.6/5.76	3.3/7.24	4.72/10.05	6.08/12.26	7.44/15.57	8.91/18.02	12.4/23.77			
	Tev 0°C	Tamb 20°C	kW	2.18/4.99	3.18/7.04	3.9/8.55	5.59/11.89	7.44/15	9/18.84	10.86/21.97	15.72/30.14		
	Tamb 25°C	kW	2.06/4.71	2.97/6.58	3.66/8.03	5.26/11.19	6.98/14.08	8.45/17.69	10.2/20.63	14.66/28.11			
	Tamb 30°C	kW	1.94/4.44	2.76/6.12	3.43/7.52	4.94/10.51	6.53/13.17	7.9/16.54	9.55/19.31	13.62/26.11			
	Tamb 35°C	kW	1.82/4.16	2.56/5.67	3.2/7.02	4.62/9.83	6.09/12.27	7.36/15.39	8.9/17.99	12.59/24.14			
	Tamb 40°C	kW	1.73/3.89	2.36/5.22	2.97/6.52	4.3/9.16	5.65/11.38	6.81/14.25	8.25/16.68	11.58/22.21			
	Tamb 45°C	kW	1.58/3.62	2.16/4.78	2.75/6.03	3.99/8.49	5.21/10.5	6.27/13.13	7.6/15.37	10.6/20.33			
	Tev -5°C	Tamb 20°C	kW	1.79/4.09	2.61/5.79	3.22/7.06	4.66/9.92	6.3/12.69	7.5/15.69	9.14/18.47	13.32/25.55		
	Tamb 25°C	kW	1.69/3.86	2.44/5.4	3.02/6.62	4.38/9.33	5.91/11.91	7.04/14.73	8.58/17.35	12.41/23.8			
	Tamb 30°C	kW	1.59/3.62	2.27/5.02	2.82/6.19	4.11/8.75	5.52/11.14	6.58/13.76	8.03/16.23	11.51/22.06			
	Tamb 35°C	kW	1.48/3.39	2.1/4.64	2.63/5.77	3.85/8.18	5.14/10.37	6.12/12.8	7.48/15.12	10.61/20.35			
	Tamb 40°C	kW	1.38/3.16	1.93/4.27	2.44/5.35	3.58/7.62	4.77/9.61	5.66/11.85	6.93/14.02	9.74/18.67			
	Tamb 45°C	kW	1.28/2.93	1.76/3.91	2.25/4.94	3.32/7.06	4.39/8.86	5.21/10.9	6.39/12.92	8.88/17.03			
	Tev -10°C	Tamb 20°C	kW	1.45/3.31	2.11/4.68	2.62/5.74	3.82/8.13	5.25/10.57	6.14/12.84	7.55/15.26	11.07/21.22		
	Tamb 25°C	kW	1.36/3.11	1.97/4.36	2.45/5.37	3.59/7.65	4.92/9.91	5.76/12.05	7.09/14.34	10.29/19.74			
	Tamb 30°C	kW	1.27/2.91	1.83/4.05	2.29/5.01	3.37/7.17	4.6/9.26	5.38/11.26	6.64/13.42	9.52/18.25			
	Tamb 35°C	kW	1.19/2.72	1.69/3.74	2.13/4.66	3.15/6.7	4.28/8.62	5/10.46	6.18/12.5	8.75/16.78			
	Tamb 40°C	kW	1.1/2.52	1.55/3.43	1.97/4.32	2.93/6.23	3.96/7.98	4.62/9.67	5.73/11.58	8/15.33			
	Tamb 45°C	kW	1.02/2.33	1.42/3.14	1.81/3.98	2.71/5.77	3.64/7.34	4.25/8.88	5.28/10.67	7.26/13.91			
	Tev -20°C	Tamb 20°C	kW	1.15/2.63	1.68/3.71	2.08/4.57	3.08/6.55	4.29/8.66	4.93/10.32	6.12/12.38	8.99/17.24		
	Tamb 25°C	kW	1.08/2.47	1.56/3.45	1.95/4.27	2.89/6.14	4.02/8.11	4.63/9.68	5.75/11.63	8.34/15.99			
	Tamb 30°C	kW	1.01/2.3	1.44/3.2	1.81/3.98	2.7/5.75	3.75/7.57	4.32/9.03	5.38/10.88	7.68/14.73			
	Tamb 35°C	kW	0.93/2.13	1.33/2.95	1.68/3.69	2.52/5.37	3.49/7.03	4.01/8.38	5.01/10.13	7.03/13.48			
	Tamb 40°C	kW	0.86/1.97	1.22/2.7	1.55/3.41	2.34/4.99	3.22/6.49	3.7/7.74	4.64/9.38	6.38/12.23			
	Tamb 45°C	kW	0.79/1.81	1.11/2.46	1.43/3.13	2.17/4.61	2.96/5.96	3.39/7.09	4.27/8.63	5.74/11			
	Tev -15°C	Tamb 20°C	kW	0.9/2.06	1.3/2.89	1.63/3.57	2.43/5.16	3.45/6.96	3.89/8.13	4.87/9.85	7.12/13.66		
	Tamb 25°C	kW	0.84/1.92	1.21/2.67	1.51/3.32	2.27/4.83	3.23/6.5	3.64/7.62	4.58/9.25	6.58/12.62			
	Tamb 30°C	kW	0.78/1.78	1.11/2.47	1.4/3.08	2.12/4.51	3/6.05	3.39/7.1	4.28/8.65	6.02/11.55			
	Tamb 35°C	kW	0.72/1.64	1.02/2.26	1.3/2.84	1.98/4.2	2.78/5.61	3.14/6.57	3.98/8.04	5.46/10.47			
	Tamb 40°C	kW	0.66/1.5	0.93/2.07	1.19/2.61	1.83/3.9	2.56/5.16	2.89/6.04	3.67/7.42	4.9/9.39			
	Tamb 45°C	kW	0.6/1.36	0.85/1.88	1.09/2.38	1.69/3.59	2.34/4.72	2.63/5.51	3.36/6.8	4.34/8.32			

Condensing units with inverter driven compressor

High reliability, low cost and easy installation

- › Evaporating working temperatures from -15°C to -40°C
- › Power control box with magnetothermic switches
- › Thermal protection
- › Electronic controller (Dixell)
- › Inverter driven compressor
- › Power supply 380-400/3N~/50
- › Oil separator
- › Condenser fans speed regulator with pressure probe
- › Liquid receiver with safety valve and liquid line
- › HP and LP pressure switches
- › Crankcase heater
- › Antivibration on suction and discharge line
- › Condenser with 6 poles axial fans
- › Condensing unit under nitrogen pressure
- › Condensation type: air with axial fan
- › Refrigerating system configuration: crankcase heater, pressure controlled condenser fan speed regulator, oil separator



- › Electrical box: power control box with thermal protection and capacity regulation
- › Soundproofing: double noise insulation (residential)

HCI				HCI2015B2B1D4R	HCI2018B2B1D4R	HCI2020B2B1D4R	HCI2030B2B1D4R	HCI2050B2B1D4R	HCI3060B2B1D4R	HCI4120B2B1D4R	HCI4140B2B1D4R
Frame type				2				3		4	
Power supply		V/ph~/Hz		380-400/3N~/50							
Max absorbed current (70Hz)		A		3.0	3.4	4.3	6.0	7.4	10.1	11.8	14.5
Max absorbed power (70Hz)		kW		1.4	1.7	2.2	3.1	4.2	5.6	6.8	8.5
Working temperature		°C		-15 ÷ -40							
Compressor	Type			Semihermetic							
	Brand			Bitzer							
	Model			2GES-2Y	2FES-2Y	2DES-2Y	4FES-3Y	4DES-5Y	4CES-6Y	4PES-12Y	4NES-14Y
Condenser	Refrigerant			R449A							
	Fin pitch	mm		2.1							
	Fans nr.			1				2			
	Fans ø	mm		450							
	Model	ph/p		1ph-6P							
Connections	Air flow	m3/h		2943		2701		5850		5366	
	Noise pressure level at 10 m (50Hz)	dB(A)		34	35	36	37	40	42	45	48
	Suction	Ø mm		16		22		28		35	
	Liquid	Ø mm		10				12			
	Standard liquid receiver	lt		2.3		5.7		10		21	
	PED category			1				2			
	Unit net weight	kg		170		193		208		215	
Cooling capacity	Min./Max. Tev 5°C	Tamb 20°C	kW	2.27/5.1	2.82/6.22	3.88/8.38	5.18/10.71	7.14/14.06	9.3/19.06	12.68/23.34	15.36/28.01
		Tamb 25°C	kW	2.1/4.73	2.61/5.77	3.6/7.77	4.8/9.92	6.6/13	8.63/17.68	11.65/21.44	14.12/25.76
	Tev 0°C	Tamb 30°C	kW	1.93/4.34	2.4/5.3	3.32/7.17	4.42/9.15	6.08/11.96	7.97/16.33	10.63/19.57	12.9/23.53
		Tamb 35°C	kW	1.76/3.95	2.18/4.82	3.05/6.58	4.06/8.4	5.57/10.96	7.33/15.02	9.63/17.73	11.7/21.33
		Tamb 40°C	kW	1.58/3.56	1.96/4.33	2.78/6	3.71/7.68	5.07/9.98	6.71/13.75	8.65/15.93	10.5/19.16
		Tamb 45°C	kW	1.41/3.16	1.74/3.84	2.51/5.43	3.38/6.98	4.59/9.04	6.11/12.52	7.7/14.17	9.33/17.01
		Tev -5°C	Tamb 20°C	kW	1.82/4.09	2.27/5.02	3.19/6.89	4.31/8.91	6/11.81	7.77/15.92	10.69/19.69
	Tamb 25°C		kW	1.68/3.79	2.1/4.64	2.94/6.36	3.98/8.22	5.53/10.88	7.19/14.73	9.79/18.02	11.95/21.79
	Tamb 30°C		kW	1.54/3.47	1.92/4.25	2.71/5.85	3.66/7.56	5.07/9.98	6.62/13.56	8.9/16.38	10.89/19.86
	Tamb 35°C		kW	1.4/3.15	1.74/3.85	2.47/5.34	3.34/6.91	4.63/9.11	6.07/12.43	8.03/14.78	9.84/17.95
	Tamb 40°C		kW	1.25/2.82	1.55/3.43	2.24/4.85	3.04/6.29	4.2/8.27	5.53/11.34	7.18/13.21	8.81/16.06
	Tev -10°C	Tamb 45°C	kW	1.1/2.48	1.36/3.01	2.02/4.36	2.75/5.69	3.79/7.46	5.02/10.29	6.34/11.68	7.79/14.21
		Tamb 20°C	kW	1.43/3.21	1.79/3.96	2.57/5.55	3.52/7.27	4.94/9.73	6.38/13.07	8.83/16.25	10.82/19.73
		Tamb 25°C	kW	1.32/2.97	1.65/3.65	2.37/5.11	3.24/6.69	4.54/8.93	5.88/12.05	8.04/14.81	9.9/18.06
		Tamb 30°C	kW	1.21/2.71	1.51/3.33	2.16/4.68	2.96/6.12	4.14/8.16	5.4/11.05	7.28/13.4	9/16.41
		Tamb 35°C	kW	1.09/2.45	1.36/3	1.97/4.25	2.69/5.57	3.77/7.41	4.93/10.09	6.53/12.02	8.1/14.77
	Tev -20°C	Tamb 40°C	kW	0.97/2.17	1.2/2.65	1.77/3.83	2.44/5.04	3.4/6.69	4.48/9.17	5.8/10.68	7.22/13.16
		Tamb 45°C	kW	0.84/1.89	1.04/2.29	1.58/3.42	2.19/4.53	3.05/6	4.04/8.28	5.09/9.37	6.35/11.58
		Tamb 20°C	kW	1.09/2.45	1.38/3.05	2.02/4.37	2.81/5.81	3.97/7.82	5.12/10.49	7.1/13.06	8.77/16
		Tamb 25°C	kW	1.01/2.27	1.27/2.8	1.85/4.01	2.57/5.32	3.63/7.15	4.7/9.63	6.43/11.84	8/14.59
		Tamb 30°C	kW	0.92/2.06	1.15/2.54	1.69/3.65	2.34/4.84	3.3/6.5	4.3/8.8	5.78/10.64	7.23/13.2
	Tev -15°C	Tamb 35°C	kW	0.82/1.84	1.03/2.27	1.52/3.29	2.12/4.38	2.98/5.86	3.9/8	5.14/9.47	6.48/11.82
		Tamb 40°C	kW	0.72/1.61	0.9/1.98	1.36/2.93	1.93/3.94	2.67/5.26	3.53/7.23	4.53/8.33	5.74/10.46
		Tamb 45°C	kW	0.61/1.37	0.76/1.67	1.2/2.59	1.7/3.51	2.38/4.68	3.16/6.48	3.92/7.22	5.01/9.13
		Tamb 20°C	kW	0.8/1.81	1.02/2.26	1.55/3.34	2.18/4.51	3.1/6.1	4/8.19	5.51/10.15	6.9/12.59
		Tamb 25°C	kW	0.74/1.66	0.94/2.07	1.41/3.04	1.98/4.1	2.81/5.54	3.65/7.48	4.95/9.12	6.25/11.41
	Tev -15°C	Tamb 30°C	kW	0.67/1.5	0.84/1.86	1.27/2.74	1.79/3.7	2.53/4.99	3.31/6.79	4.41/8.11	5.61/10.24
		Tamb 35°C	kW	0.59/1.32	0.74/1.64	1.13/2.45	1.61/3.32	2.27/4.46	2.99/6.13	3.87/7.13	4.98/9.09
		Tamb 40°C	kW	0.5/1.12	0.63/1.4	1/2.15	1.43/2.96	2.01/3.96	2.68/5.49	3.35/6.17	4.36/7.96
		Tamb 45°C	kW	0.41/0.92	0.51/1.13	0.86/1.86	1.26/2.61	1.77/3.48	2.38/4.88	2.85/5.25	3.75/6.85
		Tamb 20°C	kW	0.56/1.26	0.72/1.58	1.13/2.45	1.63/3.36	2.32/4.56	3/6/15	4.09/7.53	5.22/9.51
		Tamb 25°C	kW	0.51/1.14	0.65/1.44	1.02/2.2	1.46/3.03	2.08/4.09	2.72/5.57	3.62/6.67	4.68/8.53
		Tamb 30°C	kW	0.45/1.01	0.58/1.28	0.91/1.96	1.31/2.7	1.85/3.64	2.44/5.01	3.16/5.82	4.14/7.55
		Tamb 35°C	kW	0.38/0.86	0.5/1.1	0.79/1.71	1.16/2.39	1.63/3.2	2.18/4.46	2.72/5	3.61/6.59
		Tamb 40°C	kW	0.31/0.7	0.4/0.89	0.68/1.47	1.01/2.09	1.42/2.79	1.92/3.94	2.28/4.2	3.1/5.65
		Tamb 45°C	kW	0.23/0.52	0.3/0.66	0.57/1.23	0.87/1.8	1.22/2.39	1.68/3.45	1.86/3.43	2.59/4.73



ZEAS condensing unit for medium and low temperature refrigeration

Why choose ZEAS?

Whether it is restaurants, supermarkets or event halls – Zeas from Daikin is as individual as the requirements of the industries where it is used.

High energy efficiency

- › Daikin DC inverter scroll compressor with economizer technology
- › DC inverter fan technology
- › Eco-design compliant

Reliable operation

- › Zeas condensing units are rigorously tested on the assembly line
- › Proven inverter scroll technology
- › Proven onboard innovating economizer technology
- › Anti-corrosion treatment on the housing ensures long life even in extreme conditions

BENEFITS

› Lower energy bills

The use of Daikin proven DC technology results in lower energy bill compared to the use of standard ON/OFF units and even other capacity controller refrigeration units

› Our units are future proof

Combining Daikin innovating economizer technology with in house DC technology results in very high efficient units allowing us to outperformed the most severe eco-design minimum performance for the coming decades

BENEFITS

› Optimal food conservation

Accurate temperature and humidity control can be easily suited to the requirements for different foods and beverages resulting in less waste of precious products

› Longer lifetime expectation of our compressor

Less thermal stress on our bearings and motor windings due to the implementation of Daikin High quality DC technology in our compressor

› Longer lifetime expectations of our units

The use of our innovating economizer technology in our units guarantee that our the compressor always operates within his operating envelop even in the most harvest conditions: excessive superheat at the inlet of the compressor resulting from improper quality of installation on the refrigerated cabinets side

› No leaks

Each new Daikin designed unit is put on a vibration plate in the factory to be sure that no leak and component damage can occur during transport. Even further, in the assemble line the Zeas unit undergo several leak test

› No “dead on arrival”

ALL units leaving the factory, have already run at the end of the assembly line

› Lower installation cost

Due to the use of the onboard economizer technology and the use of the correct low GWP refrigerant we only required the use of smaller pipes compared to other traditional systems, thus also lowered the refrigerant charge of the system



Small foot print and low weight

- › Extremely compact and space-saving design
- › Easy to install, even in the smallest spaces
- › Indoor installation possible
- › Best surface to capacity ration on the market
- › Low weight thanks to compact design

Peace of mind

- › Quiet operation, unobtrusive for customers and neighbours
 - High grade sound on panels and compressors
 - Condenser fans designed to limit the noise
 - 4 low noise operation settings including night mode
- › Wide temperature range allows multiple cabinet, freezer and cold room combinations

Intelligent control

- › Unit can be connected to third party monitoring system
- › Remote control of target evaporation temperature, reset errors and other functions
- › Refrigeration unit can be controlled remotely through a power full interface

BENEFITS

- › **Only light weight supporting structures are required**
- › **No installation restrictions anymore**
Our mini Zeas due to his compact design, light weight and very silent operation can be installed everywhere!
- › **No special crane are required**
The ZEAS units are so compact that it can fit in an elevator


BENEFITS

- › **Happy neighbours and no installation restrictions anymore**
The focus on sound criteria during the design of the units results in the most silent unit(s) of the market (till 25 dB(A) @ 10 m free field conditions)

BENEFITS

- › **Quick installation and commissioning**
Advanced software solution for easy system configuration and commissioning
- › **Peace of mind**
Easy monitoring of ZEAS unit by third party Building Management Systems through the use of our Modbus interface

ZEAS, the smart choice for medium and low temperature refrigeration

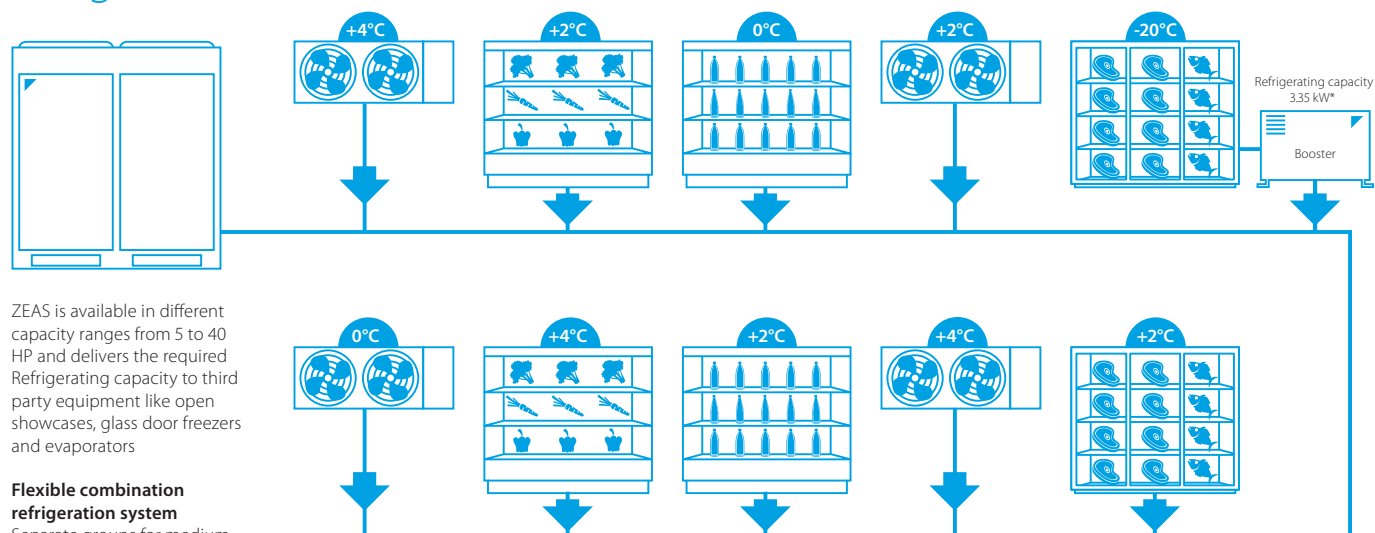

ZEAS is available in different capacity ranges from 5 to 40 HP and delivers the required Refrigerating capacity to third party equipment like open showcases, glass door freezers and evaporators

Flexible combination refrigeration system

Separate groups for medium and low temperature cooling, each with multiple cabinets and different temperatures. This flexibility and energy savings of up to 50% are only possible with ZEAS-systems.

Operating range

Ambient temperatures: -20°C to +43 °C
Evaporating temperatures: -45°C to +10°C


* $T_e = -35^\circ\text{C}$, $T_c = -10^\circ\text{C}$, 10 K SH, $T_{amb} = 32^\circ\text{C}$

* Only Zeas. Not applicable for Mini-Zeas and Multi-Zeas

Why R-410A?

R-410A is a lower GWP refrigerant (less than 2500) than R404A and is fully F-gas compliant. Its future proof: it can be used even after 2030!


Use of refrigerant in refrigeration system with a refrigeration lower than 40 kW

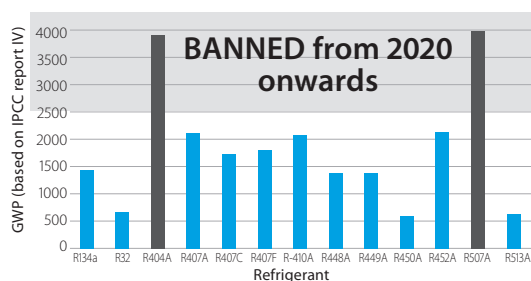

Contributes to reducing installation cost and refrigerant charge

R-410A is a high pressure refrigerant which for the same swept volume can deliver much more refrigeration capacity than standard mid pressure and low pressure refrigerants.

Delivered capacity per used refrigerant

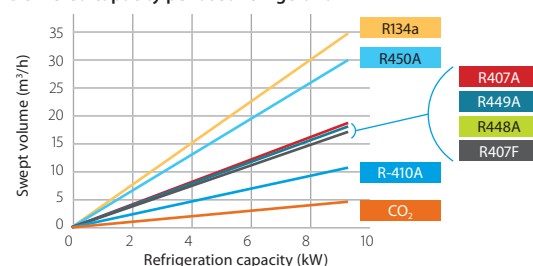


This means that for the same delivered refrigeration capacity we can use smaller components, thus reducing the installation cost and the amount of refrigerant charge in the system!

For a capacity of 8,4 kW ($T_e = -10^\circ\text{C}$ / $T_{amb} = 32^\circ\text{C}$)

Refrigerant	Suction piping diameter
R134a	1 1/8"
R407A	7/8"
R407F	7/8"
R448A	7/8"
R449A	7/8"
R450A	1 1/4"
R-410A	3/4"
CO ₂	1/2"

Refrigerant charge per used refrigerant ($T_e = -10^\circ\text{C}$ / $T_{amb} = 32^\circ\text{C}$)



R-410A is also:

- › an easy to handle, common used refrigerant in the air conditioning world, therefore it is easy to find an installer which can work with this refrigerant, compared to CO₂, Ammonia and Propane.
- › an A1 refrigerant, therefore no special safety measurements are required.

Mini-ZEAS condensing unit

Refrigeration solution for small food retailers

- › Inverter technology guarantees optimal food conservation by ensuring an accurate temperature and humidity control
- › The economized scroll contributes to a longer lifetime expectation of the refrigeration equipment and less maintenance requirement
- › The use of R-410A refrigerant allows the use of smaller piping diameters, thus reducing the refrigerant content in the system helping to lower our CO₂ footprint. R-410A is fully compliant with the latest F-Gas regulation and can be still used after 2020 and beyond
- › The DC economized compressor improves drastically the efficiency of the unit, thus helps lowering the energy bill!
- › Lowest sound level in the market down to 31 dBA. Sound level can be even further reduced thanks to the low noise modes
- › The weight of the unit is very low, therefore the unit can even be mounted on the wall
- › Up to 75% smaller than equivalent products in the market, ideal for those places where space is limited
- › Advanced software solution for easy system configuration and commissioning










More details and final information can be found by scanning or clicking the QR codes.



LRMEQ-BY1



LRLEQ-BY1

Medium Temperature Refrigeration				LRMEQ/LRLEQ	3BY1	4BY1	3BY1	4BY1
Connectable capacity	Minimum~Maximum			%	50~100			
Refrigerating capacity	Low	Nom.		kW	-		2.78 (1)	3.62 (1)
	Medium	Nom.		kW	5.90	8.40	-	-
Power input	Low	Nom.		kW	-		2.60 (1)	3.41 (1)
	Medium	Nom.		kW	2.53	3.65	-	-
COP	Medium	Nom.			2.33	2.30	-	
Seasonal energy performance ratio SEPR	R-410A 	Te -10°C - Te -35°C			4.17	4.08	1.74	1.68
Annual electricity consumption Q	R-410A 	Te -10°C - Te -35°C		kWh/a	8,698	12,651	11,920	16,048
Parameters at part load and ambient temp. 25°C (Point B)	R-410A 	Te -10°C - Te -35°C	Declared COP (COPB)		2.93	2.87	1.26	1.23
Parameters at full load and ambient temp. 32°C (Point A)	R-410A 	Te -10°C	Rated COP (COPA)		2.33	2.30	-	
		Te -35°C	Rated COP (COPA)		-		1.07	1.06
		Te -10°C - Te -35°C	Rated cooling capacity (PA)	kW	5.90	8.40	2.78	3.62
		Te -10°C - Te -35°C	Rated power input (DA)	kW	2.53	3.65	2.60	3.41
Parameters at full load and ambient temp. 43°C	R-410A 	Te -10°C	Declared COP (COP3)		1.51	1.48	-	
		Te -35°C	Declared COP (COP3)		-		0.59	0.66
		Te -10°C - Te -35°C	Cooling capacity (P3)	kW	5.28	7.22	2.13	3.02
		Te -10°C - Te -35°C	Power input (D3)	kW	3.50	4.89	3.58	4.57
Parameters at part load and ambient temp. 15°C (Point C)	R-410A 			Declared COP (COPC)	4.12	3.92	1.63	
Parameters at part load and ambient temp. 5°C (Point D)	R-410A 			Declared COP (COPD)	5.15	5.20	2.13	1.98
Dimensions	Unit	HeightxWidthxDepth		mm	1,345x900x320			
Weight	Unit			kg	126		130	
Heat exchanger	Type				Cross fin coil			
Compressor	Type				Hermetically sealed scroll compressor			
	Starting method				Direct on line (inverter driven)			
Fan	Type				Propeller			
	Quantity				2			
Fan motor	Air flow rate Cooling	Nom.		m³/min	106			
	Output Drive			W	70			
					Direct drive			
Sound pressure level	Nom.			dBA	51 (1)		51.0 (2)	
Piping connections	Liquid	OD		mm	9,52			
	Gas	OD		mm	19.1			
Refrigerant	Type/GWP				R-410A/2,087.5			
Refrigerant	Charge			kg/TCO2Eq	4.50/9.39		6.90/14.4	
	Control				Electronic expansion valve			
Power supply	Phase/Frequency/Voltage			Hz/V	3N~/50/380-415			

(1) Sound pressure data: measured at 1m in front of unit, at 1.5m height | (2) Cooling: evaporating temp. -35°C; outdoor temp. 32°C; suction SH10°C | Cooling: evaporating temp. -10°C; outdoor temp. 32°C; suction SH10°C

ZEAS condensing unit for commercial refrigeration with scroll technology

Refrigeration solution for medium to large capacity applications featuring proven VRV technology





- › One model for all applications from -45°C to 10°C evaporating temperature
- › Perfect solution for all cooling and freezing applications with variable load conditions and high energy efficiency requirements. In particular used in supermarkets, cold storage, blast coolers and freezers etc.
- › DC inverter scroll compressor with economiser function results in high energy efficiency and reliable performance
- › Reduced CO₂ emissions thanks to the use of R-410A refrigerant and low energy consumption
- › Factory tested and pre-programmed for quick and easy installation and commissioning
- › VRV (Variable Refrigerant Volume) technology for flexible application range
- › Increased installation flexibility thanks to limited dimensions
- › Low sound level including „night mode“ operation
- › For small freezing capacity, single ZEAS units can be connected to a booster unit
- › Dedicated unit to allow multi combination of 2 x 15 HP or 2 x 20 HP resulting in less pipework or installation time



More details and final information can be found by scanning or clicking the QR codes.



LREQ-BY1

LREQ-BY1				5	6	8	10	12	15	20	
Refrigerating capacity	Low temperature	Nom.	kW	5.51 (1)	6.51 (1)	8.33 (1)	10.0 (1)	10.7 (1)	13.9 (1)	15.4 (1)	
	Medium temperature	Nom.	kW	12.5 (2)	15.2 (2)	19.8 (2)	23.8 (2)	26.5 (2)	33.9 (2)	37.9 (2)	
	Power input	Low temperature	Nom.	kW	4.65 (1)	5.88 (1)	7.72 (1)	9.27 (1)	9.89 (1)	12.8 (1)	14.1 (1)
	Medium temperature	Nom.	kW	5.10 (2)	6.56 (2)	8.76 (2)	10.6 (2)	12.0 (2)	15.2 (2)	17.0 (2)	
Seasonal energy performance ratio SEPR		R-410A	Te -10°C		3.86	3.79	3.64	3.42	3.51	3.38	3.23
			Te -35°C		1.80	1.77	1.84	1.88	1.80	1.70	1.70
Annual electricity consumption Q		R-410A	Te -10°C	kWh/a	19,907	24,681	33,483	42,794	46,377	61,683	72,030
			Te -35°C	kWh/a	22,805	27,453	33,817	39,747	44,363	61,090	67,325
Parameters at full load and ambient temp. 32°C (Point A)		R-410A	Te -10°C	Rated COP (COPA)	2.45	2.32	2.26	2.25	2.21	2.23	
			Te -35°C	Rated COP (COPA)	1.18	1.11		1.08		1.09	
Parameters at full load and ambient temp. 43°C		R-410A	Te -10°C	Declared COP (COP3)	1.54	1.57	1.40	1.46	1.47	1.46	1.51
			Te -35°C	Declared COP (COP3)	0.76	0.74	0.68	0.70		0.71	0.74
Dimensions	Unit	Height	mm	1,680							
		Width	mm	635			930		1,240		
		Depth	mm	765							
Weight	Unit		kg	166			242		331	337	
Heat exchanger	Type	Cross fin coil									
Compressor	Type	Hermetically sealed scroll compressor									
	Output		W	2,600	3,200	2,100	3,000	3,400	2,600	3,400	
	Piston displacement		m³/h	11.18	13.85	19.68	23.36	25.27	32.24	35.8	
	Speed		rpm	5,280	6,540	4,320	6,060	6,960	5,280	6,960	
	Starting method	Direct on line (inverter driven)									
Compressor 2	Output		W	-			3,600				
	Speed		rpm	-			2,900				
Compressor 3	Output		W				-		3,600		
	Speed		rpm				-		2,900		
Fan	Type	Propeller fan									
	Quantity			1					2		
	Air flow rate	Cooling	Nom.	m³/min	95	102	171	179	191	230	240
Fan motor	Output		W	350			750		350	750	
	Drive			Direct drive							
Fan motor 2	Output		W				-		350	750	
Sound pressure level	Nom.		dBA	55.0 (3)	56.0 (3)	57.0 (3)	59.0 (3)	61.0 (3)	62.0 (3)	63.0 (3)	
Operation range	Evaporator	Cooling	Max.~Min.	°CDB	10~45						
Refrigerant	Type / GWP			R-410A / 2,087.5							
	Charge		kg	5.2			7.9		11.5		
			TCO ₂ eq	10.9			16.5		24.0		
	Control			Electronic expansion valve							
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/380-415							
LREQ-BY1				30				40			
System	Outdoor unit module 1			LREQ15BY1R				LREQ20BY1R			
	Outdoor unit module 2			LREQ15BY1R				LREQ20BY1R			
Refrigerating capacity	Medium temperature	Nom.	kW	67.8 (1)				75.8 (1)			
	Low temperature	Nom.	kW	27.8				29.6			
Power input	Medium temperature	Nom.	kW	30.4				34.0			
	Low temperature	Nom.	kW	25.6				27.6			
Sound pressure level	Nom.		dBA	65.0				66.0			
Piping connections	Liquid			ø 19.05							
	Gas			ø 41.28							

(1) Cooling: evaporating temp. -10°C; outdoor temp. 32°C; suction SH10°C (2) Cooling: evaporating temp. -35°C; outdoor temp. 32°C; suction SH10°C (3) Sound pressure data: measured at 1m in front of unit, at 1.5m height | RLA is based on following conditions: outdoor temp. 32°CDB; suction SH 10°C; saturated temperature equivalent to suction pressure -10°C



CO₂ Condensing units

INTRODUCTION
WHAT'S NEW
TOOLS AND PLATFORMS
PLUG AND PLAY SOLUTIONS FOR COLD ROOMS AND WINE ROOMS
DRYING AND AGEING UNITS
CONDENSING UNITS
CO ₂ CONDENSING UNITS
MULTI-COMPRESSORS PACKS AND RACKS
INTEGRATED SOLUTIONS
EVAPORATORS
OPTIONS FOR ZEAS AND CONVENI-PACK

Hubbard Condensing units with CO₂ refrigerant



- › Transcritical CO₂ Commercial Condensing Units for food retailers
- › Wide range of capacities: 2 to 10HP MT
- › Designed for quiet and energy-saving operation
- › Inverter technology reduces energy consumption by up to 30%
- › EC fans work efficiently and quietly
- › Easy and flexible installation
- › Designed as plug & play solutions



F-Gas Free



Protective Case



Plug&Play



Switchboard

Proportional
Modulation

Electronic Control

More details and final information
can be found by scanning or
clicking the QR codes.



GCU-PXB1

Medium Temperature			GCU 2020 PXB1	GCU 2040 PXB1	GCU 4070 PXB1
Capacity *		HP	2	4	10
	Min.	kW	1.80	3.25	6.25
	Max.		3.39	6.50	12.54
Power & Energy EcoDesign (2009/125/EC)		Ph./Hz./VAC	3PH / 50Hz / 400VAC		
	FLC	A	8.64	16.04	18.25
	COP/SEPR		1.87 / 3.57 SEPR	3.24 SEPR	2.92 SEPR
		kWh/a	5,840	12,307	26,393
Compressor	Compression		2 Stage (Intercooler)		
	Type		Panasonic Hermetic Rotary		
	Cap Ctrl.		ABB Frequency Inverter		
	RPM		2,200 ~ 4,200	2,200 ~ 4,800	1,800 ~ 3,600
	Qty.		1		
	Oil		DAPHNE PZ68S		
Gas cooler fans		l	0.7	1.15	1.80
	Type		Ebmpapst EC		
	Qty.		1		2
		m³/s	1.05		2.10
Sound pressure		mm		450	
	(10 m)	dB(A)	40.0	45.0	48.0
Refrigerant	Type/GWP		R744/1		
Receiver volume		l	12.50		20.00
Standard pipe run		m	25	35	40
Liquid connections	Inch/Type		3/8"/K65		
Suction connections	Inch/Type		3/8"/K65		1/2"/K65
Oil separator	Standard		no		yes/Turbooil
Oil level control	Standard		N/A		Cappillary
Dimensions	Unit	L x D x H	1,452 x 574 x 799		
Surface area		m²	0.83		1.29
Weight		kg	151	155	285
Colour	RAL		Light Grey RAL 7035 (Powder Coated & Baked)		
Controller	Type		CAREL pRack pR300 Electronic Controller		
High side PRV		Bar	N/A	120	
Intermediate PRV		Bar	90		80
Compressor HP Switch	Standard		Yes x 1		
PED 2014/68/EU	Category		Cat. III		

* Nominal Tevap. -10°C | Tamb. +32°C | 10K Superheat

Hubbard Condensing units with CO₂ refrigerant



- › Transcritical CO₂ Commercial Condensing Units for food retailers
- › Wide range of capacities: 4 to 10HP LT
- › Designed for quiet and energy-saving operation
- › Inverter technology reduces energy consumption by up to 30%
- › EC fans work efficiently and quietly
- › Easy and flexible installation
- › Designed as plug & play solutions



F-GAS Free



Protective Case



Plug&Play



Switchboard

Proportional
Modulation

Electronic Control

More details and final information
can be found by scanning or
clicking the QR codes.



HCU-PXB1

Low Temperature				HCU2040PXB1		HCU4070PXB1	
Capacity *		HP		4HP		10HP	
	Min.	kW		1.7		3.3	
	Max.			3.03		6.56	
Power & Energy EcoDesign (2009/125/EC)		Ph./Hz./VAC		3PH/50Hz/400VAC			
	FLC	A		16.04		18.25	
	COP/SEPR			1.5		1.55	
		kWh/a		15,046		31,478	
Compressor	Compression			2 Stage (Intercooler)			
	Type			Panasonic Hermetic Rotary			
	Cap Ctrl.			ABB Frequency Inverter			
	RPM			2,700 to 4,800		1,800 to 3,600	
	Qty.			1			
	Oil			Daphne PZ68S			
		l		1.15		2.3	
Gas cooler fans	Type			Ebmpapst EC			
	Qty.			1			
		m³/s		1.05		2.1	
	Ø (dia.)	mm		450			
Sound pressure (10 m)		dB(A)		45		48	
Refrigerant	Type/GWP			R744/1			
Reciever volume		l		12.5		20	
Standard pipe run		m		35		40	
Liquid connections	Inch/Type			3/8" (K65)		1/2" (K65)	
Suction connections	Inch/Type			1/2" (K65)			
Oil seperator	Standard			Yes/Turboil			
Oil level control	Standard			Capillary			
Dimensions	Unit	L x D x H	mm	1,452 x 574 x 799		1,684 x 773 x 1,438	
Surface area			m²	0.83		1.29	
Weight			kg	161		300	
Colour	RAL			Light Grey RAL7035 (Powder Coated & Baked)			
Controller	Type			CAREL pRack pR300 Electronic Controller & Ultracap			
High side PRV			Bar	120			
Intermetdiate PRV			Bar	90		80	
Compressor HP Switch	Standard			Yes x 1			
PED 2014/68/EU	Category			Cat. III			

* Nominal Tevap -35°C | Tamb +32°C | 10K Superheat

Compact CO₂ transcritical

Compact compressor racks fully equipped with gas cooler (CO₂) to generate cold both with CO₂ transcritical cycle

- › Double V battery (NV58 only).
- › Greater exchange surface that allows a lower refrigerant flow and charge.
- › A battery can act as an evaporator in case of heat demand and when cold generation is not required (optional rhx plus nv58).
- › Electrical panel with controller and disconnect switch with external control.
- › NV58 drivable EC fans.
- › Reduced footprint.
- › EPOXY resin treatment option for battery protection.
- › Two independent modules to contain the compressors and the gas cooler
- › Condenser with 5 mm tubes (high performance) and with low refrigerant charge.
- › VF on the first compressor of each group.
- › Gas cooler with EC fans and maximum pressure of 120 bar.
- › Optional: up to 1 exchanger (RHX or IHX).
- › It covers refrigeration services in one or two temperatures, working as a booster.
- › Design pressures:
 - MP (MT Suction): 52 bar.
 - LP (LT Suction): 30 bar.
 - IP (Receiv. and liquid line): 70 bar.
 - HP (Discharge): 120 bar.



1 to 2 piston compressors



Low noise level [Optional]




1 to 3 scroll compressors



Electrical panel



Axial/Radial AC/EC versions



Electronic control [Optional]




Outdoor unit [Axial]




Proportional Modul. [Optional]

FNV42

Axial version




Radial version

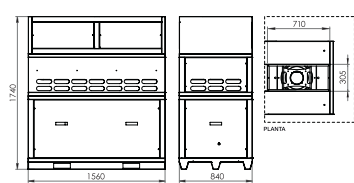


FNV58

Axial version



Radial version

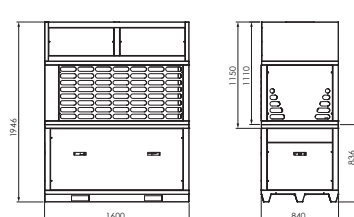

NV42 CO ₂						
Application		MT		MT + LT		
Cooling capacity	kW	12 kW		12 + 4 kW	18 + 4 kW	
Number of compressors	n°	1		1 + 1	1 + 1	
Inverter compressors	n°	1		1 + 0	1 + 0	
Extra Equipment	Tipo	RHX		RHX	RHX	
Recovery (max)	kW	13 kW		13 kW	13 kW	
NV58 CO ₂						
Application		MT			MT + LT	
Cooling capacity	kW	32 kW	36 kW	28 + 4 kW	32 + 4 kW	
Number of compressors	n°	1	2	1 + 1	2 + 1	
Inverter compressors	n°	1	1	1 + 0	1 + 0	
Extra Equipment	Tipo	RHX	RHX	RHX	RHX	
Recovery (max)	kW	23 kW	25 kW	23 kW	25 kW	

* Calculation conditions: T_{ev} MT -8°C, T_{ev} LT -32°C, T_sgc +35°C.

Compact CO₂ transcritical

Compact compressor racks fully equipped for cold generation with CO₂ in transcritical cycle

- › Double V battery.
- › Greater exchange surface, that allows a lower refrigerant flow and charge.
- › Possibility of installing a heat recovery unit.
- › Electrical panel with controller and disconnect switch with external control.
- › Two independent modules to contain the compressors and the gas cooler.
- › NV58 drivable EC fans.
- › EPOXY resin treatment option for battery protection.
- › Complete solution.
- › Plug & Play.
- › Indoor & outdoor.
- › Gas Cooler included.
- › 360° access.
- › Compact equipment.
- › Soundproofing.
- › Selectable electronic brand.
- › Condenser with 5 mm tubes (high performance) and with low refrigerant charge.
- › Optional: proportional compressor.



Selectable electronic brand



NOVA66: 360° accessibility



AXIAL VERSION NV66

Fans

› 3x Ø500 mm

Air flow

› 24.000 m³/h

Sound pressure at 10 m

› 46 up to 57 dB(A)



RHX



PS 120 / 70 /
52 / 30 Bar



Plug & Play



Emergency unit



Compact design



RADIAL VERSION NV66

Fans

› 3x Ø500 mm

Air flow



› 22.500 m³/h

Available pressure

› 100 Pa

Sound pressure at 10 m

› 50 up to 56 dB(A)

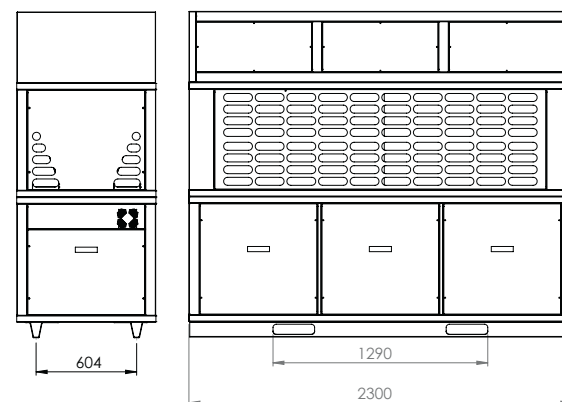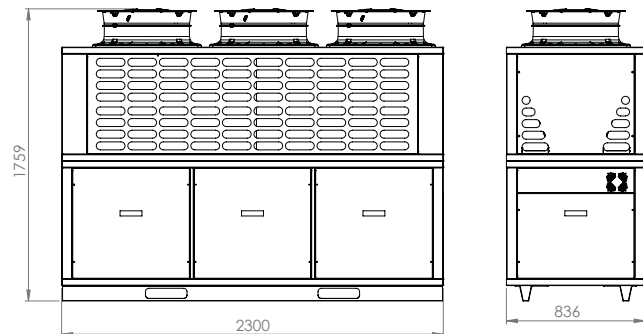

NV66 CO ₂				
Application		MT		MT + CP
Cooling capacity	kW	44 kW	54 kW	63 kW
Number of compressors	nº	2	3	2 + 1
Inverter compressors	nº	1	1	1 + 1
Extra equipment	Tipo	IHX / RHX	IHX / RHX	IHX / RHX
Recovery (max)	kW	30 kW	38 kW	40 kW
				40 + 4 kW
				2 + 1
				1 + 0 (opt.)
				IHX / RHX
				30 kW

* Calculation conditions: T_{ev} MT -8°C, T_{ev} LT -32°C, T_{sgc} +35°C.

Compact transcritical CO₂ compressor racks

Compact compressor racks fully equipped for cold generation with CO₂ in transcritical cycle


- › Double V battery with great exchange surface and lower flow rate required.
- › Two independent modules to contain the compressors and the gas cooler.
- › 360° accessible.
- › Up to 5 compressors.
- › 3 air outlet configurations.
- › Electrical panel with controller.
- › Multiple possibilities of loading and transportation.
- › Complete solution.
- › Plug & Play.
- › Indoor & outdoor.
- › Gas Cooler included.
- › 360° access.
- › Compact equipment.
- › Soundproofing.
- › Selectable electronic brand.
- › Parallel compressor (option).
- › Oil separator accumulator.
- › 90 l liquid receiver with internal exchanger for connection to the emergency unit.
- › Two electronic refrigerant level sensors (high and low level).
- › Emergency unit on board.
- › Parallel compressor (option).
- › Copper pipes and connections.
- › Frequency inverter for the first MT compressor and optional for the LT compressor.
- › Selectable electronic brands: Tewis (EWCM9000pro), Danfoss (AK-PC 772) or Carel (pRack PR300T).
- › Axial/radial fans option.
- › RHX option.
- › Design pressures:
 - MP (MT Suction) : 52 bar.
 - LP (LT Suction) : 30 bar.
 - IP (Receiver and liquid line) : 70 bar.
 - HP (Discharge) : 120 bar.




Selectable electronic brand



RADIAL VERSION

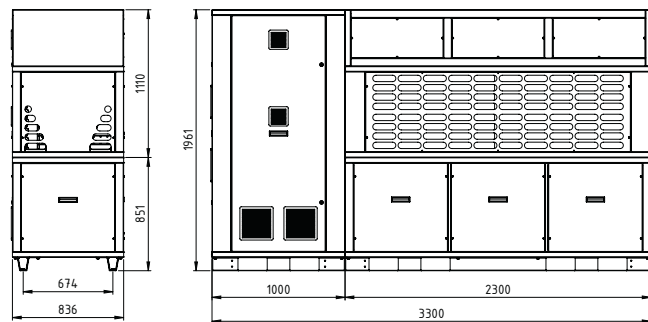

AXIAL VERSION

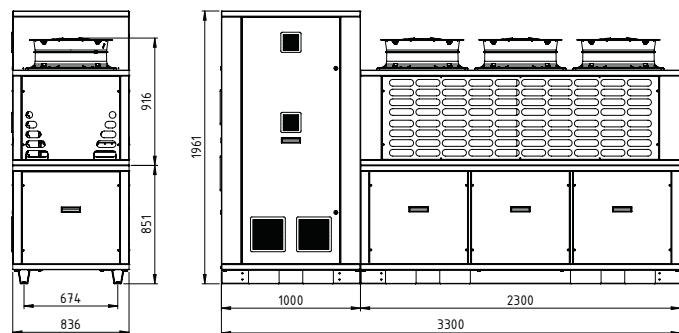

RHX



Emergency unit



PS 120 / 70 /
52 / 30 Bar



Compact design



Plug & Play

	GNV66**291YBX	GNV66**045XBX	TNV66**951YBX	TNV66**921YBX	TNV66**170XBX	TNV66**042XBX	TNV66**301XBX	TNV66**965YBX	TNV66**767XDX
Application	MT		MT + LT						
Compressor			Bitzer						
Capacity MT*	kW	47.37	70.05	43.44	49.33	66.12	46.52	63.31	28.42
Capacity LT*	kW	—	—	3.9	3.9	3.9	6.68	6.68	7.27
MT compressors		1x 4JTC-15K (V.F.) + 1x 4HTC-15K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4JTC-15K (V.F.) + 1x 4HTC-15K	1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4MTC-10K (V.F.) + 1x 4KTC-10K
LT compressors		—	—	1x 2MSL-07K	1x 2MSL-07K	1x 2MSL-07K	2x 2MSL-07K	2x 2MSL-07K	2x 2MSL-07K

	TNV66**919YBX	TNV66**762XDX	TNV66**768XDX	TNV66**310XBX	TNV66**322XBX	TNV66**966YBX	TNV66**769XDX	TNV66**775XDX	TNV66**323XBX
Application	MT + LT								
Compressor	Bitzer			Dorin			Bitzer		
Capacity MT*	kW	44.96	26.44	34.8	42.09	58.88	23.99	30.85	41
Capacity LT*	kW	8.26	9.68	9.68	11.1	11.1	11.1	13.54	13.54
MT compressors		1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x CD490-6.4H (V.F.) + 1x CD490-9.2M	1x CD4120-9.2H (V.F.) + 1x CD490-9.2M	1x 4MTC-10K (V.F.) + 2x 4KTC-10K	1x 4JTC-15K (V.F.) + 2x 4HTC-15K	1x 4MTC-10K (V.F.) + 1x 4KTC-10K	1x CD4120-9.2H (V.F.) + 1x CD490-9.2M	1x CD490-6.4H (V.F.) + 2x CD490-9.2M
LT compressors		1x 2JSL-2K	2x CDS151B	2x CDS151B	2x 2KSL-1K	2x 2KSL-1K	2x 2KSL-1K	2x CDS181B	2x CDS181B

* Calculation conditions: T_{ev} MT -8°C, T_{ev} LT -32°C, T_{sgc} +35°C.



INTRODUCTION
WHAT'S NEW
TOOLS AND PLATFORMS
PLUG AND PLAY SOLUTIONS FOR COLD ROOMS AND WINE ROOMS
DRYING AND AGEING UNITS
CONDENSING UNITS
CO ₂ CONDENSING UNITS
MULTI-COMPRESSORS PACKS AND RACKS
INTEGRATED SOLUTIONS
EVAPORATORS
OPTIONS FOR ZEAS AND CONVENI-PACK



Multi-compressor packs and racks

Compressor packs & racks



Multi compressor units

- ☑ Open frame for multi-compressors racks
- ☑ Three or four compressors on parallel
- ☑ Many different compressor types
 - › Hermetic Scroll (Brand: Copeland)
 - › Semihermetic reciprocating (Brand: Bitzer, Dorin, Copeland Stream & Frascold)
 - › Screw (Brand: J&E Hall (single screw) and Bitzer (twin screw))
 - Larger Refrigeration capacities or solution with screw compressors has to be selected from our technical department.
 - Consist in many models for medium and low temperature, with a refrigeration capacity up to 900,000 Watt.
- ☑ Compatible with latest refrigerants*




Standard features

- › Metal open frame with electrical switchboard
- › Compressor parallel with discharge and suction header
- › Liquid receiver
- › Liquid line
- › High and low pressure switch
- › Electrical switchboard complete with electronic control



Single Screw compressor

The single screw compressor consists of a main single screw and two gate rotors. They are designed for high capacities and optimal performances through the step less capacity control.

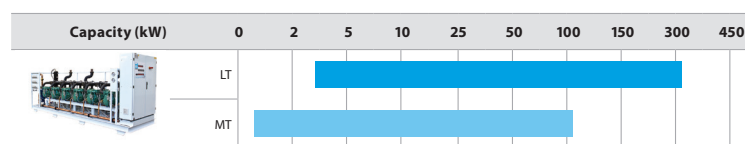

Most common used options:

- › Panels to close the frame and put it outside
- › Oil equalization through mechanical floating valve
- › Oil equalization through electronic valve
- › Oversized liquid receiver
- › Refrigerant charge

Other options available on request

*Note: Selection from Selection software based on R404A, R134a and R407F



Compact CO₂ mini compressor racks

Mini compact compressor racks with less than 1 m² footprint, highly competitive, with CO₂ in transcritical cycle for cold generation


- › Highly accessible front opening door with hinges.
- › Lateral practicable door.
- › Vertical liquid receiver with exchanger prepared for connection to the emergency unit.
- › Practicable electrical panel with controller and complete wiring.
- › Compatible with Tewis remote management systems.
- › Adapted design for proper loading and transportation.
- › Up to 2 MT compressors and 1 LT compressor.
- › 360° access for easy maintenance.
- › Oil separator accumulator.
- › Two refrigerant level electronic sensors (high and low level).
- › Frequency inverter for the first MT compressor and optional for the LT compressor.
- › Optional frame for outdoor use.
- › 48l liquid receiver, with internal exchanger for connection to the emergency unit.
- › Optional connection to an external RHX. RHX can be installed on MT models.
- › Emergency unit not included (junctions included). Required power: 280 W @R134a Tev +5°C.
- › Selectable electronic brands: Tewis (EWCM9000pro), Danfoss (AK-PC 772) or Carel (pRack PR300T Medium).
- › Bitzer & Dorin compressors.
- › Design pressures:
 - MP (MT suction) : 52 bar.
 - LP (LT suction) : 30 bar.
 - IP (Receiver and liquid line) : 70 bar.
 - HP (Discharge): 120 bar.



360° access, with lateral practicable door.



Reduced dimensions to allow an easy access to all the components of the machine.

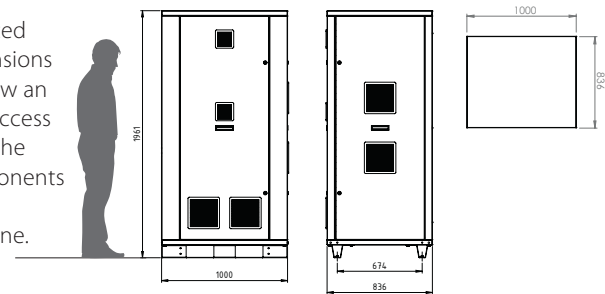

RHX



PS 120 / 70 / 52 / 30 Bar



Plug & Play



Sound-proofing [Optional]



Compact design



< Maintan. costs

BITZER		GNS21JC302XBX	GNS21JC872YBX	GNS21JC882YBX	TNS21JC304XBX	TNS21JC881YBX	TNS21JC880YBX
Application		MT			MT+LT		
Capacity MT*	kW	18.17	22.63	35.15	14.24	31.88	31.22
Capacity LT*	kW	-			3.90	3.23	3.90
GC needed	kW	32.08	39.96	62.08	32.08	62.08	62.08
MT Compressors	n°	1x 2MTE-5K + 1x 2KTE-7K	1x 4PTC-7K + 1x 4MTC-7K	1x 4MTC-10K + 1x 4KTC-10K	1x 2MTE-5K + 1x 2KTE-7K	1x 4MTC-10K + 1x 4KTC-10K	1x 4MTC-10K + 1x 4KTC-10K
LT Compressors	n°	-			1x 2MSL-07K	1x 2NSL-05K	1x 2MSL-07K
Lp**	dB(A)	38.7	46.7	47.3	39.4	47.4	47.4

DORIN		GNS21JC677XDX	GNS21JC684XDX	GNS21JC750XDX	TNS21JC670XDX	TNS21JC679XDX	TNS21JC678XDX	TNS21JC658XDX	TNS21JC753XDX	TNS21JC659XDX
Application		MT			MT+LT					
Capacity MT*	kW	25.58	36.35	44.71	21.07	27.93	30.33	31.83	34.05	40.19
Capacity LT*	kW	-			4.37	8.15	5.83	4.37	10.30	4.37
GC Capacity	kW	45.17	64.18	78.95	45.17	64.18			78.95	
MT Compressors	n°	1x CD475-4.7H + 1x CD475-6.4M	1x CD490-6.4H + 1x CD490-9.2M	1x CD4120-9.2H + 1x CD490-9.2M	1x CD475-4.7H + 1x CD475-6.4M	1x CD490-6.4H + 1x CD490-9.2M	1x CD490-6.4H + 1x CD490-9.2M	1x CD490-6.4H + 1x CD490-9.2M	1x CD4120-9.2H + 1x CD490-9.2M	1x CD4120-9.2H + 1x CD490-9.2M
LT Compressors	n°	-			1x CDS101B	1x CDS181B	1x CDS151B	1x CDS101B	1x CDS301B	1x CDS101B
Lp**	dB(A)	39.6	41.2	42.1	39.7	41.3		42.2		

* Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsgc +35°C. | **Sound pressure at 10m, considering a spherical surface, in open ground and with soundproofing. Tolerance ±2 dB.

AXIAL		GNV58PE	GNV58PE LPS	GNV66PE	GNV66PE LPS
Capacity	kW	58.84	52.15	88.4	79.27
Air flow	m³/h	16,400	12,800	24,000	19,200
Sound pressure 10m	dBA	52	46	53	45
Fans	n°	2x Ø500 EC		3x Ø500 EC	

RAD.		GNV58NE	GNV66NE
Capacity	kW	56.28	85.61
Air flow	m³/h	15,000	22,500
Sound pressure 10m	dBA	49	50
Fans	n°	2x Ø500 EC	3x Ø500 EC

* Calculation conditions: Air T. 35°C, GC outlet 37°C, Gas Inlet T. 115°C, Gas Pressure 92 bar. Available pressure radial models. 100 Pa



GNV58

GNV66

CO₂ compact compressor rack

Compact compressor racks fully equipped for the generation of cold with CO₂ in transcritical cycle

- › Horizontal liquid receiver: 92/120/160 lit.
- › Tubular chassis.
- › Electrical panel located above the compressors.
- › Separator accumulator.
- › Up to 6 compressors.
- › Easy start-up and maintenance: all connections on the same side.
- › Reduced width of 790 mm that allows it to pass through any standard door.
- › Copper connections.
- › Oil separator accumulator.
- › 92/120/160 l liquid receiver, with internal exchanger for connection to emergency unit.
- › Two electronic refrigerant level sensors (high and low levels).
- › Frequency inverter for the first MT compressor and optional for the LT compressor.
- › Selectable electronics brand: Tewis (EWCM9000pro), Danfoss (AK-PC 772 or 782) or Carel (pRack PR300T Medium or Large).
- › All copper connections.
- › Design pressures:
 - MP (MT suction) : 52 bar.
 - LP (LT suction) : 30 bar.
 - IP (Receiver and liquid line) : 70 bar.
 - HP (Discharge): 120 bar.



RHX



Emergency unit



Plug & Play

PS 120 / 70 /
52 / 30 Bar

Compact design



40 to 140KW




Receiver up to 160l



Smart Rack

Three different frame sizes available:

- › 4 compressors: length 1900 mm
- › 5 compressors: length 2650 mm
- › 6 compressors: length 3350 mm

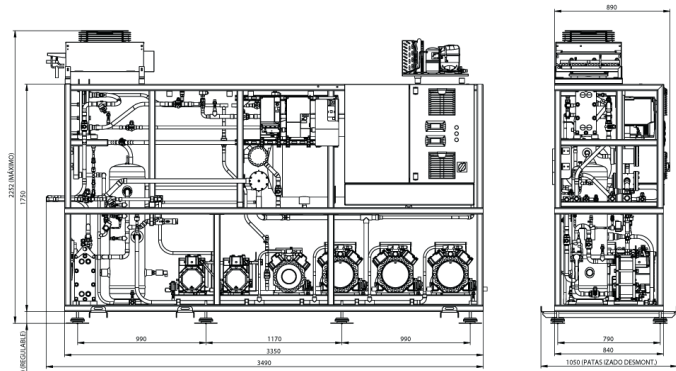

			GSR2FJ_093YBX	GSR2FJ_041YBX	TSR2EJ_585XBX	TSR2FJ_092XBX	TSR2FJ_086YBX	TSR2FJ_089YBX
Application			MT		MT+LT			
Capacity MT*	70 Hz	kW	94.9	114.67	36.84	62.7	75.26	81.48
Capacity LT*	70 Hz	kW	-	-	5.79	6.48	6.48	6.48
MT Compressors		n°	1 x 4JTE-15K (V.F.) + 2 x 4JTE-15K	1 x 4HTE-20K (V.F.) + 1 x 4FTE-20K	1 x 4JTE-15K (V.F.) + 1 x 4JTE-15K	1 x 4HTE-20K (V.F.) + 1 x 4FTE-20K	1 x 4HTE-20K (V.F.) + 2 x 4HTE-20K	1 x 4HTE-20K (V.F.) + 1 x 4HTE-20K
Parallel Compressors		n°	1 x 4MTE-10K	1 x 4JTE-15K	-	-	-	1 x 4MTE-10K
LT Compressors		n°	-	-	1 x 2KSL-1K	1 x 2KSL-1K	1 x 2KSL-1K	1 x 2KSL-1K
			TSR2FJ_439YBX	TSR2FJ_090YBX	TSR2FJ_490YBX	TSR2FJ_489YBX	TSR2EJ_112XBX	TSR2FJ_128XBX
Application			MT+LT					
Capacity MT*	70 Hz	kW	70.61	37.97	62.01	73.76	20.47	50.81
Capacity LT*	70 Hz	kW	11.1	12.7	14.16	14.16	18.5	18.33
MT Compressors		n°	1 x 4HTE-20K (V.F.) + 2 x 4HTE-20K	1 x 4JTE-15K (V.F.) + 1 x 4HTE-20K	1 x 4JTE-15K (V.F.) + 1 x 4JTE-15K	1 x 4HTE-20K (V.F.) + 1 x 4HTE-20K	1 x 4JTE-15K (V.F.) + 1 x 4JTE-15K	1 x 4HTE-20K (V.F.) + 1 x 4FTE-20K
Parallel Compressors		n°	-	1 x 4MTE-10K	1 x 4MTE-10K	1 x 4MTE-10K	-	-
LT Compressors		n°	1 x 2KSL-1K + 1 x 2KSL-1K	1 x 2GSL-3K	1 x 2JSL-2K + 1 x 2JSL-2K	1 x 2JSL-2K + 1 x 2JSL-2K	1 x 2HSL-3K + 1 x 2HSL-3K	1 x 2HSL-3K + 1 x 2HSL-3K
			TSR2FJ_128XBX	TSR2EJ_893XBX	TSR2FJ_193YBX	TSR2EJ_895XBX	TSR2FJ_444YBX	TSR2FJ_088YBX
Application			MT+LT					
Capacity MT*	70 Hz	kW	80.75	22.5	82.91	22.81	46.8	76.79
Capacity LT*	70 Hz	kW	18.5	21.06	21.77	28.07	27.82	27.82
MT Compressors		n°	1 x 4HTE-20K (V.F.) + 2 x 4FTE-20K	1 x 4JTE-15K (V.F.) + 1 x 4HTE-20K	1 x 4HTE-20K (V.F.) + 2 x 4FTE-20K	1 x 4HTE-20K (V.F.) + 1 x 4HTE-20K	1 x 4JTE-15K (V.F.) + 2 x 4HTE-20K	1 x 4HTE-20K (V.F.) + 2 x 4FTE-20K
Parallel Compressors		n°	-	-	-	-	-	-
LT Compressors		n°	2 x 2HSL-3K	1 x 2GSL-3K + 1 x 2GSL-3K	1 x 2GSL-3K + 1 x 2GSL-3K	1 x 2FSL-4K + 1 x 2FSL-4K	1 x 2FSL-4K + 1 x 2FSL-4K	1 x 2FSL-4K + 1 x 2FSL-4K
			TSR2GJ_001ZBX	TSR2GJ_002ZBX	TSR2GJ_003ZBX	TSR2GJ_004ZBX	TSR2GJ_995YBX	TSR2GJ_005ZBX
Application			MT+LT					
Capacity MT*	70 Hz	kW	66.43	72.4	106.38	118.19	70	134.08
Capacity LT*	70 Hz	kW	6.68	11.1	14.16	21.77	25	27.82
MT Compressors		n°	1 x 4MTE-10K (V.F.) + 2 x 4MTE-10K	1 x 4MTE-10K (V.F.) + 2 x 4KTE-10K	1 x 4JTE-15K (V.F.) + 2 x 4HTE-15K	1 x 4HTE-20K (V.F.) + 2 x 4HTE-15K	1 x 4JTE-15K (V.F.) + 2 x 4HTE-20K	1 x 4HTE-20K (V.F.) + 2 x 4FTE-20K
Parallel Compressors		n°	1 x 4MTE-10K (V.F.) + 1 x 2MSL-07K (V.F.)	1 x 4MTE-10K (V.F.) + 1 x 2KSL-1K (V.F.)	1 x 4JTE-15K (V.F.) + 1 x 2JSL-2K (V.F.)	1 x 4HTE-20K (V.F.) + 1 x 2GSL-3K (V.F.)	1 x 4MTE-10K (V.F.) + 1 x 2FSL-4K (V.F.)	1 x 4HTE-20K (V.F.) + 1 x 2FSL-4K (V.F.)
LT Compressors		n°	1 x 2MSL-07K (V.F.) + 1 x 2MSL-07K	1 x 2KSL-1K (V.F.) + 1 x 2KSL-1K	1 x 2JSL-2K (V.F.) + 1 x 2JSL-2K	1 x 2GSL-3K (V.F.) + 1 x 2GSL-3K	1 x 2FSL-4K (V.F.) + 1 x 2FSL-4K	1 x 2FSL-4K (V.F.) + 1 x 2FSL-4K

* Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsgc +35°C. | Design pressures: MP (MT suction) : 52 bar, LP (LT suction) : 30 bar, IP (Container and liquid line) : 70 bar, HP (Discharge): 120 bar | Temperature, LT = Low Temperature, pc = Parallel compressor

CO₂ compact compressor rack

Smart Duplex compressor racks offer the highest powers for the commercial refrigeration range with CO₂ at 2 temperatures

- › Profitability and energy savings.
- › 100% CO₂ = low environmental impact.
- › Compact and simple design (only 1 m depth).
- › High capacity up to 9 compressors.
- › Vertical liquid receiver with high capacity (up to 2x250 l).
- › Extreme flexibility.
- › Remote control (accessible anywhere).
- › Easy commissioning and maintainance.
- › Possibility of 2 RHX, one for DHW and one for air conditioning.
- › Tubular chassis.
- › Oil separator accumulator.
- › High capacity liquid receiver (up to 2x250 l).
- › Up to 9 compressors.
- › Frequency inverter for MT & LT.
- › Two electronic sensors for refrigerant levels.
- › All copper connections.



RHX



Plug & Play

1000 - 2500 m²

PS 120 / 60 / 52 / 30 Bar



Emergency unit



Compact design




80 to 250KW



Liquid receiver up to 2x250



< Maintan. costs

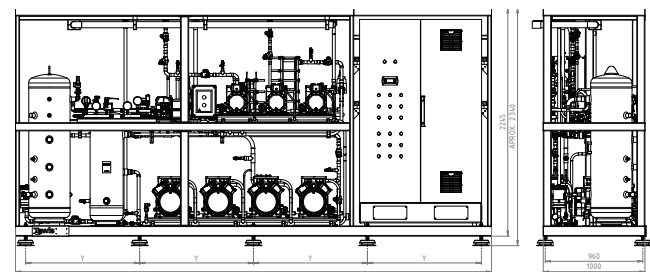

from 4,7 up to 6 m (depending on model)

DEPTH:
JUST 1 m

			GSD3KJ_048ZBX	GSD3MJ_049ZBX	TSD3JJ_028ZBX	TSD3JJ_030ZBX	TSD3JJ_031ZBX	TSD3KJ_033ZBX
Application			MT		52	MT+LT		
Capacity MT*	70 Hz	kW	179.56	266.6		64.41	77.52	105.43
Capacity LT*	70 Hz	kW	-	-	20.37	31.32	26.38	34.14
MT Compressors		n°	1x 4HTE-20K (V.F. @70 Hz) + 4x 4FTE-30K	1x 4FTE-30K (V.F. @70 Hz) + 4x 4CTE-30K	1x 4JTE-15K (V.F. @70 Hz) + 2x 4HTE-20K	1x 4JTE-15K (V.F. @70 Hz) + 3x 4HTE-20K	1x 4HTE-20K (V.F. @70 Hz) + 2x 4FTE-30K	1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K
Parallel Compressors		n°						
LT Compressors		n°			1x 2JSL-2K (V.F. @70 Hz) + 2x 2JSL-2K	1x 2GSL-3K (V.F. @70 Hz) + 2x 2GSL-3K	1x 2HSL-3K (V.F. @70 Hz) + 2x 2HSL-3K	1x 2HSL-3K (V.F. @70 Hz) + 3x 2HSL-3K
			TSD3JJ_035ZBX	TSD3JJ_034ZBX	TSD3JJ_050ZBX	TSD3JJ_051ZBX	TSD3MJ_052ZBX	TSD3MJ_053ZBX
Application			MT+LT					
Capacity MT*	70 Hz	kW	122.55	113.46	155.36	172.74	184.04	213.73
Capacity LT*	70 Hz	kW	18.62	26.81	36.44	36.44	75.88	48.21
MT Compressors		n°	1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K	1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K	1x 4HTE-20K (V.F. @70 Hz) + 3x 4CTE-30K	1x 4FTE-30K (V.F. @70 Hz) + 3x 4CTE-30K	1x 4FTE-30K (V.F. @70 Hz) + 4x 4CTE-30K	1x 4FTE-30K (V.F. @70 Hz) + 4x 4CTE-30K
Parallel Compressors		n°						
LT Compressors		n°	1x 2HSL-3K (V.F. @70 Hz) + 1x 2HSL-3K	1x 2JSL-2K (V.F. @70 Hz) + 2x 2GSL-3K	1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K	1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K	1x 2DSL-5K (V.F. @70 Hz) + 3x 2DSL-5K	1x 2GSL-3K (V.F. @70 Hz) + 3x 2FSL-4K
			TSD3JJ_037ZBX	TSD3JJ_039ZBX	TSD3JJ_042ZBX	TSD3JJ_040ZBX	TSD3JJ_044ZBX	TSD3KJ_041ZBX
Application			MT+LT					
Capacity MT*	70 Hz	kW	85.97	110.01	123.56	119.33	130.4	123.71
Capacity LT*	70 Hz	kW	31.32	26.81	14.38	35.02	24.67	36.44
MT Compressors		n°	1x 4JTE-15K (V.F. @70 Hz) + 2x 4HTE-20K	1x 4HTE-20K (V.F. @70 Hz) + 2x 4HTE-20K	1x 4HTE-20K (V.F. @70 Hz) + 2x 4HTE-20K	1x 4JTE-15K (V.F. @70 Hz) + 2x 4FTE-30K	1x 4JTE-15K (V.F. @70 Hz) + 2x 4FTE-30K	1x 4HTE-20K (V.F. @70 Hz) + 3x 4HTE-20K
Parallel Compressors		n°	1x 4JTE-15K (V.F.)	1x 4HTE-20K (V.F.)	1x 4HTE-20K (V.F.)	1x 4HTE-20K (V.F.)	1x 4HTE-20K (V.F.)	1x 4HTE-20K (V.F.)
LT Compressors		n°	1x 2GSL-3K (V.F. @70 Hz) + 2x 2GSL-3K	1x 2JSL-2K (V.F. @70 Hz) + 2x 2GSL-3K	1x 2JSL-2K (V.F. @70 Hz) + 1x 2JSL-2K	1x 2ESL-4K (V.F. @70 Hz) + 1x 2ESL-4K	1x 2GSL-3K (V.F. @70 Hz) + 1x 2FSL-4K	1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K
			TSD3KJ_041ZBX	TSD3JJ_045ZBX	TSD3KJ_046ZBX	TSD3KJ_047ZBX	TSD3KJ_096ZBX	
Application			MT+LT					
Capacity MT*	70 Hz	kW	123.71	130.05	174.7	188.76	204.69	
Capacity LT*	70 Hz	kW	36.44	31.32	49.61	36.44	26.38	
MT Compressors		n°	1x 4HTE-20K (V.F. @70 Hz) + 3x 4HTE-20K	1x 4HTE-20K (V.F. @70 Hz) + 2x 4FTE-30K	1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K	1x 4HTE-20K (V.F. @70 Hz) + 3x 4FTE-30K	1x 4GTE-30K (V.F. @70 Hz) + 2x 4DTE-25K	
Parallel Compressors		n°	1x 4HTE-20K (V.F.)	1x 4HTE-20K (V.F.)	1x 4FTE-30K (V.F.)	1x 4FTE-30K (V.F.)	1x 4HTE-20K (V.F.) + 1x 4HTE-20K	
LT Compressors		n°	1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K	1x 2GSL-3K (V.F. @70 Hz) + 2x 2GSL-3K	1x 2ESL-4K (V.F. @70 Hz) + 2x 2ESL-4K	1x 2GSL-3K (V.F. @70 Hz) + 2x 2FSL-4K	1x 2HSL-3K (V.F. @70 Hz) + 1x 2HSL-3K	


*Calculation conditions: Tev MT -8°C, Tev LT -32°C, Tsgc +35°C.

Switchboard & electronic control




Switchboard

- › Bench-mounted switchboard, including complete wiring.
- › Power supply at 400V / 3F + N / 50Hz
- › Frequency inverter in the first compressor in sections BT, MT and parallel
- › Booster components and remote gas coolers electrically protected against overcurrents and short circuits.
- › Option: electrical connections of power supply to the auxiliary unit

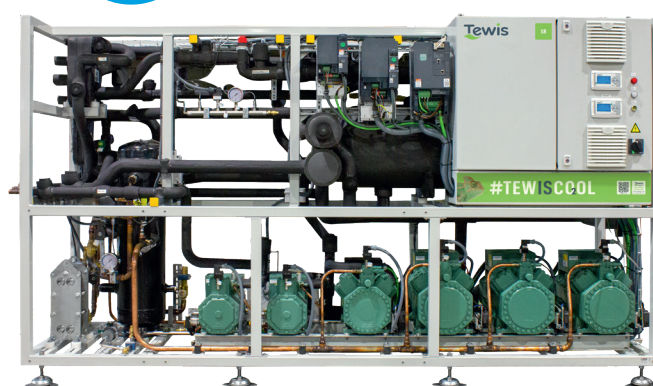

Electronic control

- › It represents the best option for transcritical and subcritical CO₂ solutions with Booster circuit and allows to manage up to two circuits for the recovery of heat.
- › Televis System compatible and open for the integration of Modbus RTU / TCP or BACnet MS / TP (optional) systems.
- › Touch screen with synoptic and real-time data.
- › Data logging and alarms.
- › Historical charts and data tables.
- › Parameter management.

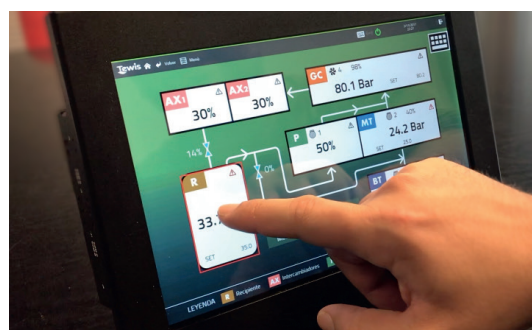




Fresh ideas
for reliable performance

Choose the better solution – with Tewis Full CO₂ refrigeration systems

Why do so many widely-known retail chains count on Tewis? Because Tewis offers a well-thought-out, complete range of efficient refrigeration systems. Especially when working with R-744 under high pressure, best quality solutions count double. Avoid problems – with Tewis features like full stainless steel piping or surprisingly intuitive control systems.

www.daikin.eu

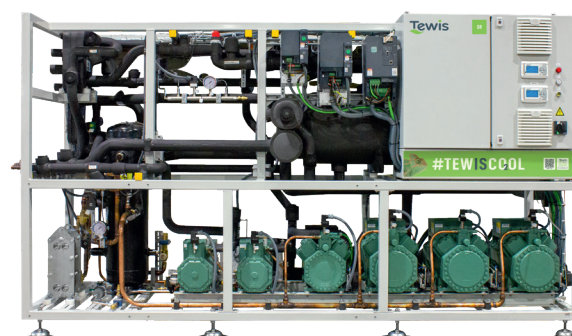

Tewis
a member of **DAIKIN** group







Integrated solutions

Freezing (Low temperature)
(-20° C / +35° C)

Chilling (Medium temperature)
(0° C / +35° C)


Cooling/AC (High Temperature)
(+20° C / +10° C)

Heating


Model	Product name	Capacity (kW)	0	2	5	10	25	50	100	150	300	450
Integrated solution for chilling, freezing, comfort cooling and heating	Conveni-Pack LRYEQ-AY  	LT										
		MT										
		A/C										
		HR + HP										
	CO ₂ Conveni-Pack LRNUN-AY1, LRYEN-AY1  	MT										
		AC										
		HR										

Indoor units compatible with CO₂ Conveni-Pack

NEW



CO₂ Round Flow Cassette
FXFN-A

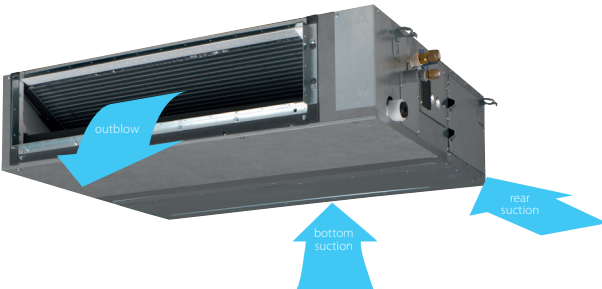

Concealed Ceiling Unit
FXSN-A2

Service station (Ranst, Belgium)
Conveni-Pack

Discover why a Belgian petrol station owner chose Daikin for its shop comfort and refrigeration needs.
www.youtube.com/DaikinEurope




Conveni-Pack, integrated solution for commercial refrigeration, heating and air conditioning

Why choose Conveni-Pack?

Competition in the retail food sector is fierce. This does not just affect the income you can earn from sales - operating costs are also a determining factor for success.


Energy efficient heat recovery system

- › Conveni-Pack recovers up to 100% of the heat extracted from supermarket refrigeration cases and re-uses it to heat the retail space and improve shop comfort at no additional cost (heat recovery system)
- › Savings of up to 50% on energy costs
- › Daikin inverter scroll compressor with economizer technology

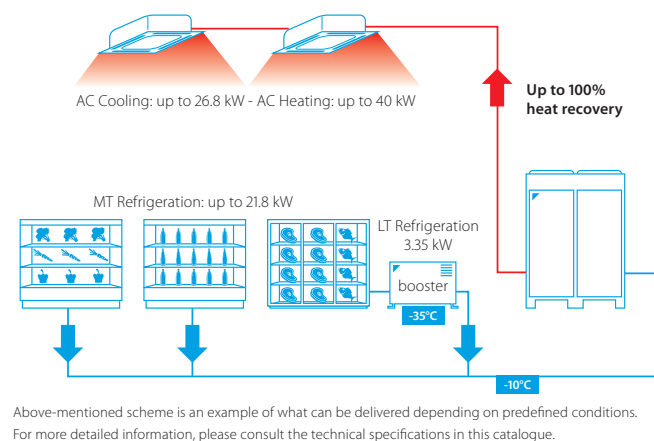

Installing a compact solution

- › Easy to install, even in small spaces
- › Small footprint (up to 60% smaller footprint than conventional systems) and low weight
- › Reduced piping requirements
- › Minimal planning groundwork and lower assembly costs

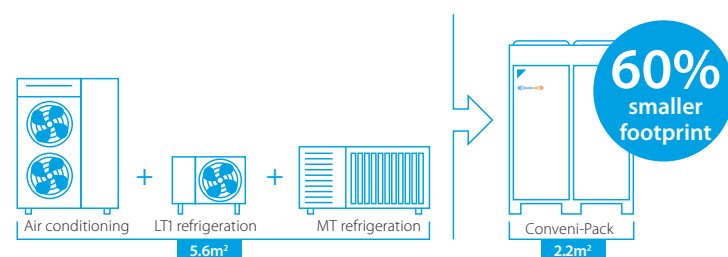

Unique combination

- › First mass-produced, whole-building system to combine medium and low refrigeration, heating, air conditioning in one circuit


Reliable operation

- › Error-proof component selection
- › Factory leak-tested and pre-charged


Year-round climate comfort

- › Quiet operation : Improved acoustics thanks to night operation mode, inverter control and inverter driven fans with optimised blades and grills
- › High grade sound insulation on both panels and compressors
- › Specially designed fan blades to limit sound emissions
- › 4 low sound operation settings including night mode
- › The heat recovered from refrigerated and freezer display cabinets can be used to provide heating for the shop.


Summer

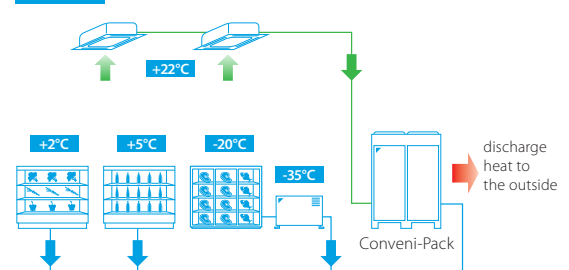

Spring/Autumn

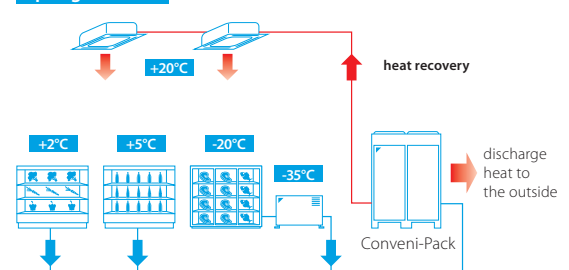

Winter

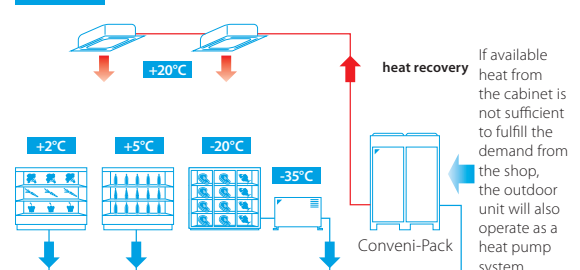

Internationally awarded

Winner of several awards* thanks to the innovating technology used and environmental friendly solution offered:



- › Winner of UK Environmental Product of the Year, Cooling Industry Awards - 2006
- › Winner of Incentive Prize, German Environment Ministry - 2007
- › Winner of the Innovation Trophy, equipmag (exhibition in France) - 2008
- › Winner of 2014 Institute of Refrigeration Ireland (IRI) Environmental award
- › Environmental Friendliness category of the Top Retail Product Awards 2014 in Germany

Reference

Edeka Buschkühle supermarket (Germany)

2 Conveni-Pack systems supply 32 meters of service counters, 12.5 meters of convenience fridges, one cooling storage room for fruit, an air curtain and 5 indoor units; the ZEAS system supplies two deep-freeze cabinets with a total capacity of 5 kW.



Discover more references on

www.daikineurope.com/references



Benefits for installers/consultants

- › Integrated electrical & control box
- › Unit already pre-charged with refrigerant
- › Established VRV technology ensuring optimised installation and maintenance
- › Reduced delivery time thanks to European manufacturing plant
- › Flexible system for multiple applications
- › Connectable to all grocery refrigeration applications and supplied with a wide range of air conditioning indoor units to meet shop requirements
- › Outdoor units can be positioned up to 35m above or 10m below the indoor units
- › Piping length possible up to 130m
- › Suitable for indoor installation through the use of high ESP fans


Benefits for shop owners

- › Thought design for supermarkets and smaller retail outlets
- › Maximised retail sales space available as Conveni-Pack has a footprint up to 60% smaller than conventional grocery refrigeration systems
- › Reduced energy consumption by up to 50% through heat recovery
- › Quiet operation, thus ideal for densely populated urban areas

Marketing tools


Refrigeration Xpress

User-friendly design software for Conveni-Pack, CCU, SCU and ZEAS condensing units. Its detailed report includes a list of materials, piping and wiring diagrams, and device options.

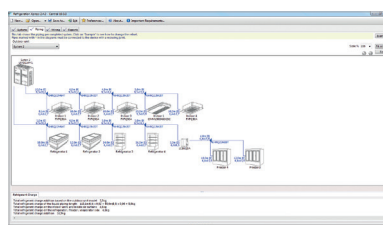

Short videos

- › Watch a short animation on the unique refrigeration solution Conveni-Pack

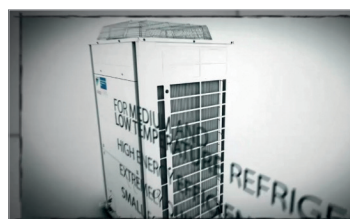

CO₂ Conveni-Pack



Why choose CO₂ Conveni-pack?

- ✓ DX Refrigeration, Heating & Space cooling by CO₂, for those whom demand a totally natural solution
- ✓ Heat recovery, and for those colder days automatic heat pump operation
- ✓ Fully assembled & packaged unit, providing low noise levels
- ✓ Mass produced in Daikin Europe's award winning factory
- ✓ Each unit is fully factory & run tested
- ✓ All units in stock, fast delivery
- ✓ Reduces annual energy consumption by up to 50%, compared to other manufacturers solutions.
- ✓ Hermetic swing compressor, complete with two stage compression, for lower running temperatures
- ✓ Oversized DC Brushless motor technology for improved reliability & efficiency
- ✓ Automatically balances refrigeration & space heating / cooling loads
- ✓ "Plug and Play" technology, reduced "On site" commissioning
- ✓ Optimized control logic for reliability and efficiencies
- ✓ Adaptable evaporation temperature control

Natural HVACR 4 life

Project for demonstration of innovative, integrated HVACR installations with natural refrigerant.



OBJECTIVES

- **Remove barriers** in the market for introducing integrated refrigeration and air conditioning systems that use natural refrigerants which have a lower Global Warming Potential.
- **Raise awareness** among installers, engineers, customers and general public on the potential of a combined air conditioning and refrigeration system that uses CO₂ as a natural refrigerant.
- **Contribute** to the implementation of the EU F-gas Directive.

ACTIONS

1. Demonstrate viability


- test prototype in **Belgium** that integrates air conditioning and refrigeration with heat recovery in real life settings;
- install, operate and monitor the new concept in European supermarkets, located in both temperate and warm climate zones (**Germany** and **Spain, respectively**)

2. Organise training sessions for installers and customers

3. Help update the definitions of standards and energy labelling schemes for multi-functional products by providing information on tested risk management, procedures regarding flammability and toxicity of natural refrigerants

4. Develop a cassette-type indoor unit using CO₂ that best provides comfort cooling and heating

5. Research the potential of cold storage for improving the Total Equivalent Warming Impact

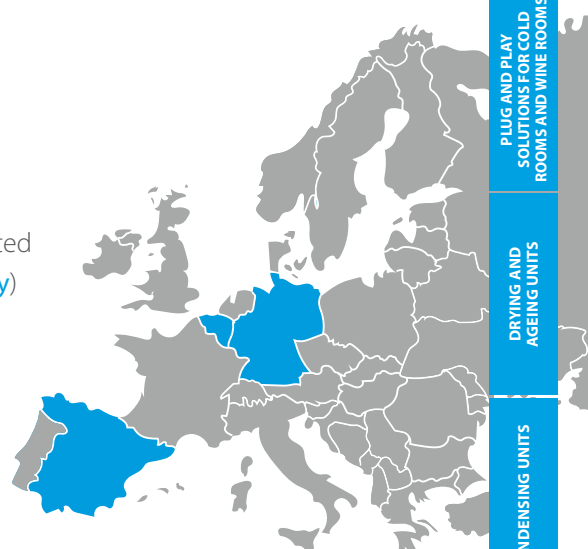

For more information refer to the website: naturalhvacr4life.eu




Low Temperature Showcases

Optional CO₂ CCU's are also available for Remote LT applications (not connected to Conveni-pack)




Plugin LT showcases with propane or LT condensing units with CO₂ are available to satisfy also freezer capacity needs.

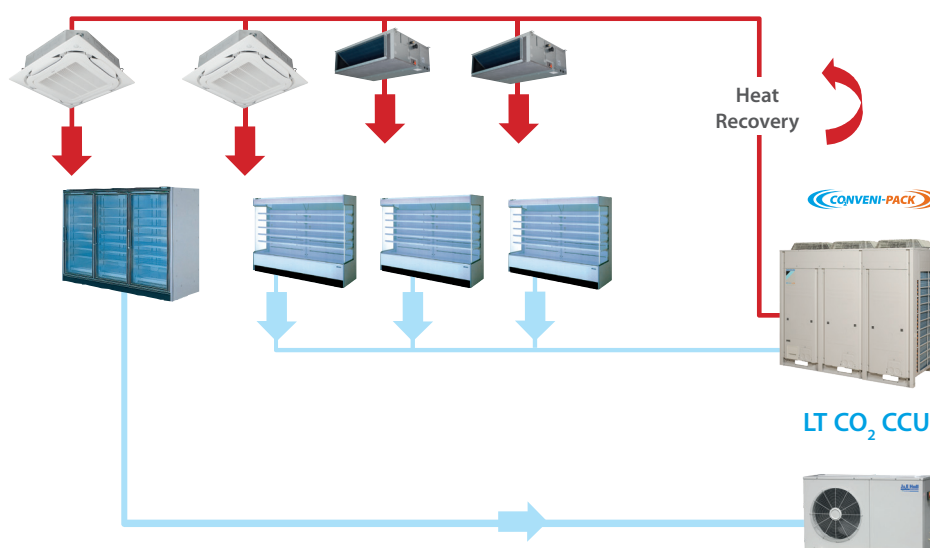

CO₂ Conveni-Pack refrigeration system with heat recovery

Refrigeration solution for food retailers featuring award winning technology for heat recovery

- › Integrates high and low temperature refrigeration and air conditioning (including heating) into one system
- › By using heat recovery, optimised controls and state of the art compressor technology, Conveni-pack can reduce annual energy consumption up to 50% or more, compared to conventional systems
- › Lower associated CO₂ emissions thanks to the heat pump technology
- › Conveni-pack's modular design allows it to be used for smaller as well as larger shops
- › The modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet individual installation constraints
- › The heat extracted from the refrigeration showcases or evaporators can be re-used for comfort heating of the shop at no extra cost
- › Low sound level including „night mode“ operation

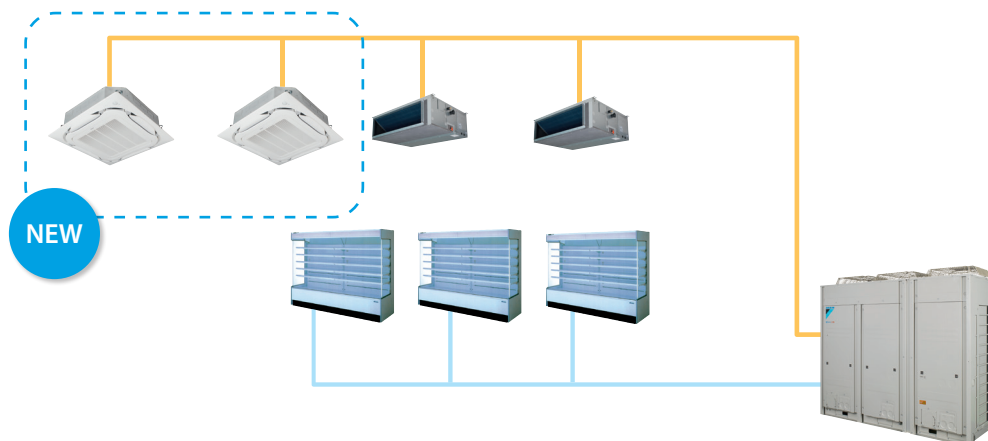

More details and final information can be found by scanning or clicking the QR codes.




LRYEN-AY1

Medium Temperature Refrigeration, Cooling Only, Heating Only				LRYEN	10AY1
Parameters at part load and ambient temp. 25°C (Point B)					-
Parameters at part load and ambient temp. 25°C (Point B)					-
Dimensions	Unit	HeightxWidthxDepth		mm	1,680x1,930x765
Weight	Unit			kg	563
Heat exchanger	Type				Cross fin coil
Compressor	Type				Hermetically sealed swing compressor
	Output			W	4,600.0
	Piston displacement			m ³ /h	6.16
	Starting method				Direct on line (inverter driven)
Fan	Type				Propeller fan
	Quantity				3
	Air flow rate	Cooling	Nom.	m ³ /min	300
Fan motor	Output			W	750
Sound pressure level	Nom.			dBA	64.0
Refrigerant	GWP				1.0
	Type 2				R-744
	Charge			kg	6.30
	Control				Electronic expansion valve
Power supply	Phase/Frequency/Voltage			Hz/V	3N~/50/380-415

LRYEN10AY1+LRNUN5AY1 | Compressor 1 | Compressor 2 | Compressor 3 | Factory charge of unit | Only K65 with D.P. 120 bar is allowed to use for AC piping connections. | The safety valve pressure is indicated as gauge pressure. | Only K65 with D.P. 90 bar is allowed to use for refrigeration piping.

Capacity-up module for CO₂ Conveni-Pack

- › Integrates high and low temperature refrigeration and air conditioning (including heating) into one system
- › By using heat recovery, optimised controls and state of the art compressor technology, Conveni-pack can reduce annual energy consumption up to 50% or more, compared to conventional systems
- › Lower associated CO₂ emissions thanks to the heat pump technology
- › Conveni-pack's modular design allows it to be used for smaller as well as larger shops
- › The modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet individual installation constraints
- › The heat extracted from the refrigeration showcases or evaporators can be re-used for comfort heating of the shop at no extra cost
- › Low sound level including „night mode“ operation

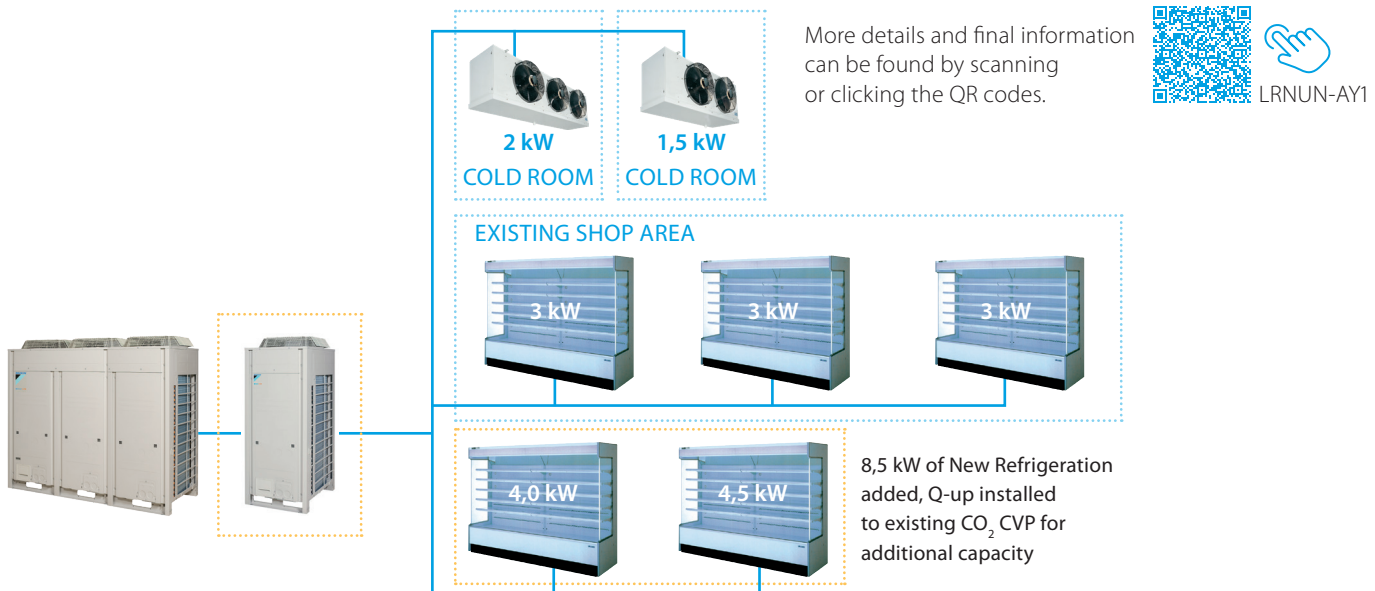

Model	Refrigeration Capacity*	HR Capacity		Model	Refrigeration Capacity*	HR Capacity
DAIKIN CO ₂ CVP AC10	3 - 14.5 kW	22 kW	Q-up can also easily be added later, as part of a system upgrade	DAIKIN CO ₂ CVP AC10 + Q-up	3- 21 kW	22 kW

* Refrigeration capacity given under following conditions: Te = -10°C, 10 K SH and ambient = 32°C


Medium Temperature Refrigeration				LRNUN	5AY1
Parameters at part load and ambient temp. 25°C (Point B)					-
Parameters at part load and ambient temp. 25°C (Point B)					-
Dimensions	Unit	HeightxWidthxDepth	mm		1,680x635x765
Weight	Unit		kg		173
Heat exchanger	Type				Cross fin coil
Compressor	Type				Hermetically sealed swing compressor
	Output		W		4,600.0
	Piston displacement		m ³ /h		6.16
	Starting method				Direct on line (inverter driven)
Fan	Type				Propeller fan
	Quantity				1
	Air flow rate	Cooling	Nom.	m ³ /min	102
Fan motor	Output			W	350
Sound pressure level	Nom.			dBA	65.0 (1)
Refrigerant	GWP				1.0
	Type 2				R-744
	Charge			kg	3.20
	Control				Electronic expansion valve
Power supply	Phase/Frequency/Voltage			Hz/V	3N~/50/380-415

(1) LRNUN10AY1+LRNUN5AY1 | Compressor 1 | Compressor 2 | Compressor 3 | Factory charge of unit | Only K65 with D.P. 120 bar is allowed to use for AC piping connections. | The safety valve pressure is indicated as gauge pressure. | Only K65 with D.P. 90 bar is allowed to use for refrigeration piping.


CO₂ Round Flow Cassette

360° air discharge for optimum efficiency and comfort

- › Automatic filter cleaning results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Lowest installation height in the market: 214mm for class 20-63
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms




- › Standard drain pump with 675mm lift increases flexibility and installation speed




Round flow cassette panel (7 types)
Daikin Round Flow Cassette with 360° airflow, wide flaps and optional intelligent sensors

1) Standard Panel (White & Black)

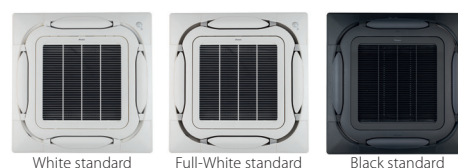

2) Auto-cleaning Panel (White & Black)



3) Designer Panel (White & Black)



More details and final information can be found by scanning or clicking the QR codes.



FXFN-A


FXFN-A				50	71	112
Capacity (H tap)	Cooling	Nom.	kW	5.6	8.0	12.5
	Heating	Nom.	kW	6.3	9.0	14.0
Dimensions	Unit	HeightxWidthxDepth	mm	246x840x840		288x840x840
Weight	Unit	gross	kg	29		32
		net	kg	26		29
Fan	Type	Turbo fan				
	Quantity	1				
Air flow rate	Cooling/heating	high/medium/low	m³/h	15.5/12.8/10.7	23.2/19.4/13.8	32.7/27.6/20.6
Fan motor	Output	W				
Sound power level	Cooling	dBA		53	58	63
Sound pressure level	Cooling	high/medium/low	dBA	35/33/31 (4)	40/36/33 (4)	46/43/38 (4)
	Heating	high/medium/low	dBA	36/34/31 (1)(4)	41/37/33 (1)(4)	47/44/39 (1)(4)
Piping connection	Brazing type	Liquid	mm	9.52		
		Gas	mm	12.7		
Operation range	Indoor	Cooling	°C(WB)	14~24 (2)		
		Heating	°C(WB)	15~27		
Refrigerant	Type	R744				
Power supply	Phase/Frequency/Voltage			Hz/V		
	1~50/60Hz 220~240/220V					

(1) Update of sound pressure level in heating on 2.3.2020 bases on test results (for 71 and 112 class) | (2) update of Cooling max (25 -> 24°C) operation range on 2.3.2020 based on test result | (3) The panel lineup is the same as the existing machine lineup | (4) Sound of designer panel: +3dB


Expansion valve box

EV Box

- › EV Box is the unit which include EV & Control
- › 1 unit of EV box must be used together with 1 unit of CO₂ Cassette.

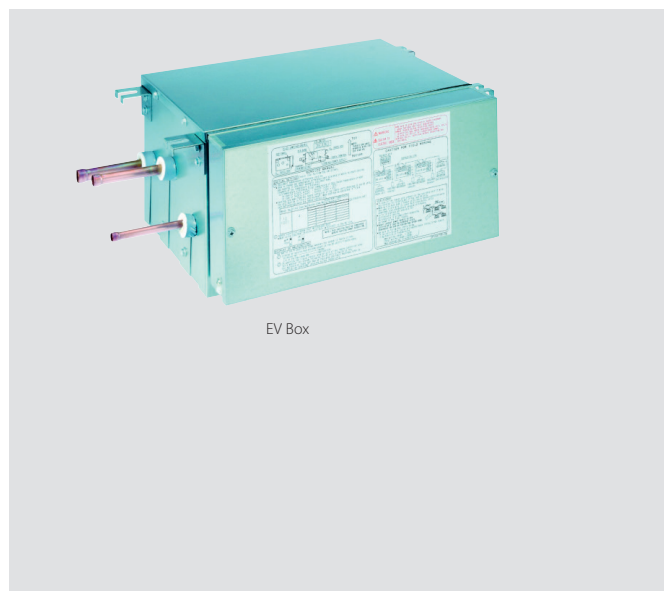

EV Box

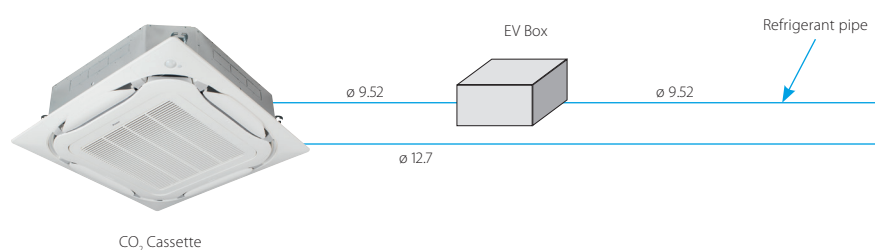CO₂ Cassette

Combination with Cassette Indoor unit

Cassette indoor unit	FXFN50A2VEB	FXFN71A2VEB	FXFN112A2VEB
EV Box			
BEV2N112A7V1B	✓	✓	✓

Specifications			BEV2N-A	BEV2N112A7V1B
Power supply				1~, 50/60Hz, 220~240/220V
Dimension	Height	mm		207
	Wide	mm		388
	Depth	mm		326
Mass	Unit	kg		12 (Tentative)
Refrigerant Type				R744 (CO ₂)
Piping connections Liquid	Type			Brazing
	OD	mm		ø 9.52

Concealed ceiling unit with medium ESP for CO₂ Conveni-pack

To respond to all shop requirements for comfort cooling and heating, a wide range of air conditioning indoor units are available

- › Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge




- › Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Reduced energy consumption thanks to specially developed DC fan motor and drain pump
- › Optional fresh air intake

Fresh air intake opening in casing




* Brings in up to 10% of fresh air into the room

Optional fresh air intake kit




* Allow larger quantities of fresh air to be brought in


- › Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles




For free use into a false ceiling



For connecting onto a suction canvas (not supplied by Daikin)

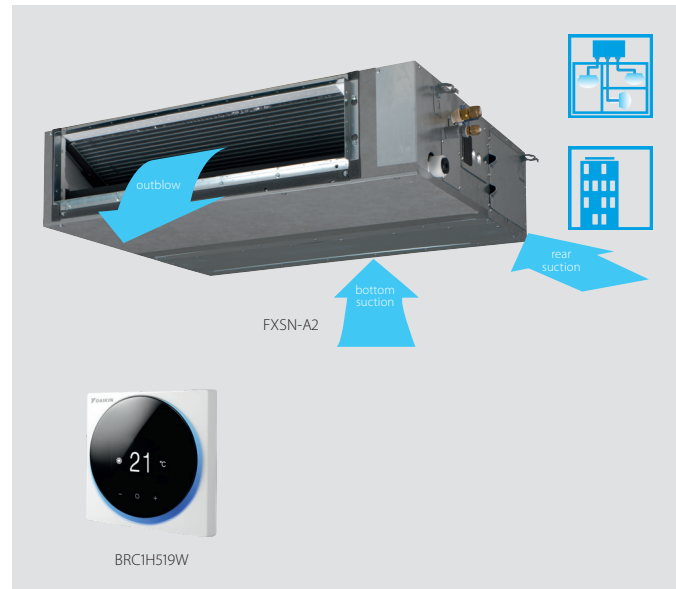

- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed




Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within $\pm 10\%$

Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance * the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature. Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster

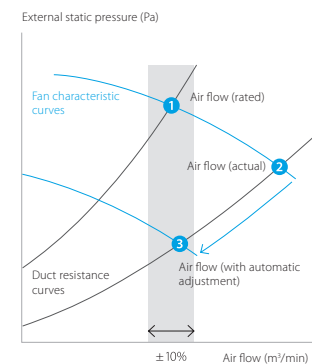

FXSN-A2



More details and final information can be found by scanning or clicking the QR codes.

Indoor unit				FXSN	50A2	71A2	112A2
Cooling capacity	Total capacity	Nom.	kW	5.60	8.00	12.50	
Heating capacity	Total capacity	Nom.	kW	6.30	9.00	14.0	
Power input - 50Hz	Cooling	Nom.	kW	0.186	0.258	0.388	
	Heating	Nom.	kW	0.181	0.253	0.383	
Dimensions	Unit	HeightxWidthxDepth	mm	245x700x800	245x1,000x800	245x1,400x800	
Weight	Unit		kg	31.0	40.0	50.0	
Casing	Material						
Fan	Air flow rate	Cooling	High / Medium / Low	m³/min	15.2/13.0/11.0	23.0/19.5/16.0	36.0/31.5/26.0
	- 50Hz	Heating	High / Medium / Low	m³/min	15.2/13.0/11.0	23.0/19.5/16.0	36.0/31.5/26.0
	External static pressure - 50Hz	Factory set / High		Pa	30/150	40/150	50/150
Air filter	Type						
Sound power level	Cooling	At high fan speed		dBA	61	63	66
Sound pressure level	Cooling	High / Medium / Low		dBA	36.0/33.0/31.0	37.0/34.0/32.0	40.0/38.0/34.0
	Heating	High / Medium / Low		dBA	38.0/35.0/32.0	39.0/36.0/33.0	42.0/40.0/38.0
Refrigerant	Type/GWP						
Piping connections	Liquid	OD	mm	9.52	R-744/1.0		
	Gas	OD	mm	12.7			
	Drain	VP20 (I.D. 20/O.D. 26), drain height 625 mm					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220		
Current - 50Hz	Maximum fuse amps (MFA)			A	16		
Control systems	Infrared remote control				BRC4C65 / BRC4C66		
	Wired remote control				BRC1H52W/S/K		

Contains fluorinated greenhouse gases

Acoustic solution for Conveni-pack

- › Complete & professional housing solution, series KVD specially designed for Daikin CVP units
- › Stable and storm proof construction, tested and verified by TÜV Austria
- › Extremely low static pressure drop, measured by TÜV Austria
- › Highest soundproofing values thanks to multi-layered sound insulation
- › Already assembled ex works -> ensures very quick installation of the outdoor unit
- › Base frame made of steel-profiles, insulated bottom and drain pan are standard
- › Housing can be modified for an even higher dampening with additional deflection plates and hoods

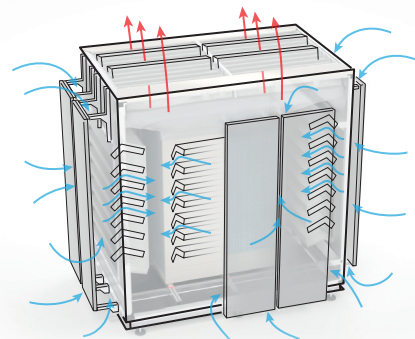

Please contact:

Kellner Engineering GmbH

kellner.r@kellner-engineering.com

www.kellner-engineering.com

Office: +43-2236-660048



suitable for 1x Daikin LRYEN10AY1 (10 HP)

acoustic housing type	external dimensions (HxWxD)	sound dampening ¹		pressure drop ²	weight
		on average Ø	vertically		
Kellner KVD300-PV Standard	2,350 x 3,071 x 1,461 mm	-18 dB(A)	-13 dB(A)	< 20 Pa	850 kg
+ deflection plates (8 pc.)	2,350 x 3,671 x 1,761 mm	-21 dB(A)	-13 dB(A)	< 25 Pa	320 kg
+ redirection hood (exhaust front)	3,100 x 3,671 x 1,761 mm	-24 dB(A)	-24 dB(A)	< 32 Pa	300 kg
Kellner KVD300-PV-UL Ultra	2,550 x 3,071 x 1,461 mm	-20 dB(A)	-18 dB(A)	< 25 Pa	875 kg
+ deflection plates (8 pc.)	2,550 x 3,671 x 1,761 mm	-23 dB(A)	-18 dB(A)	< 30 Pa	320 kg
+ redirection hood (exhaust front)	3,300 x 3,671 x 1,761 mm	-25 dB(A)	-26 dB(A)	< 37 Pa	300 kg

suitable for 1x Daikin LRYEN10AY1 (10 HP) + 1x Daikin LRNUN5AY1 (5 HP)

acoustic housing type	external dimensions (HxWxD)	sound dampening ¹		pressure drop ²	weight
		on average Ø	vertically		
Kellner KVD310-PV Standard	2,350 x 3,871 x 1,461 mm	-18 dB(A)	-13 dB(A)	< 20 Pa	975 kg
+ deflection plates (10 pc.)	2,350 x 4,471 x 1,761 mm	-21 dB(A)	-13 dB(A)	< 25 Pa	400 kg
+ redirection hood (exhaust front)	3,100 x 4,471 x 1,761 mm	-24 dB(A)	-24 dB(A)	< 32 Pa	350 kg
Kellner KVD310-PV-UL Ultra	2,550 x 3,871 x 1,461 mm	-20 dB(A)	-18 dB(A)	< 25 Pa	1,000 kg
+ deflection plates (10 pc.)	2,550 x 4,471 x 1,761 mm	-23 dB(A)	-18 dB(A)	< 30 Pa	400 kg
+ redirection hood (exhaust front)	3,300 x 4,471 x 1,761 mm	-25 dB(A)	-26 dB(A)	< 37 Pa	350 kg

(1) NORM EN ISO 9614-2:1997 - Determination of the sound power level of noise sources from sound intensity measurements


EN ISO 11546-1:2010 - Determination of the sound insulation of soundproofing capsules

EN ISO 717-1:2013 - Assessment of sound insulation in buildings and building components

(2) total pressure drop at maximum air-flow

Acoustic solution for Conveni-Pack

- › Solflex acoustic solutions have been developed to reduce the sound emissions of outdoor units without limiting functionality.
- › Nominal sound reduction measured according to DIN EN ISO 3744 by a renomated and independent laboratory.
- › Exterior surfaces are standard available in RAL7016 anthracite grey, RAL9006 white aluminium, RAL9010 pure white or in galvanised steel.
- › Online technical data and configuration including sound evaluation to norm accepted by many authorities to obtain building permission.
- › On demand custom made acoustic solutions with site assistance including installation for large scale projects.
- › Very large variety of standard acoustic solutions available for all type of HVACR units.

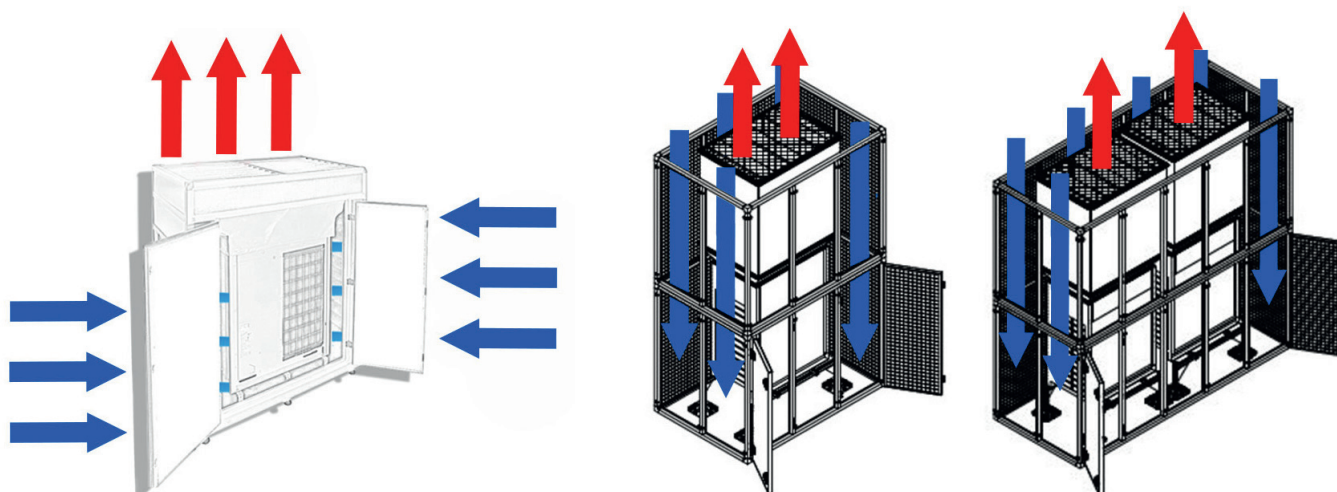

For more info, please contact:

Solflex GmbH
 office@solflex.eu
 www.solflex.eu



suitable for 1x Daikin LRYEN10AY1 (10 HP)

acoustic housing type	external dimensions (HxWxD)	Nominal Sound Insulation ¹	pressure drop ²	weight
SDW 211763-1 A	2,450 x 3,150 x 1,600 mm	Rw(Ctr, 50-5000): 20 dB	< 5 Pa	550 kg
V 211763-2 A	2,600 x 3,100 x 1,650 mm	D(e): 19 dB(A)	<15 Pa	1,250 kg
XV 211763-3 A	2,600 x 3,500 x 1,900 mm	D(e): 23 dB(A)	<25 Pa	1,450 kg
SQVY 211763-4 A	3,800 x 3,150 x 1,600 mm	D(e): 25 dB(A)	<25 Pa	950 kg

suitable for 1x Daikin LRYEN10AY1 (10 HP) + 1x Daikin LRNUN5AY1 (5 HP)

acoustic housing type	external dimensions (HxWxD)	Nominal Sound Insulation ¹	pressure drop ²	weight
SDW 211763-1 B	2,450 x 3,925 x 1,600 mm	Rw(Ctr, 50-5000): 20 dB	< 5 Pa	630 kg
V 211763-2 B	2,600 x 3,800 x 1,650 mm	D(e): 19 dB(A)	<15 Pa	1,350 kg
XV 211763-3 B	2,600 x 4,200 x 1,900 mm	D(e): 23 dB(A)	<25 Pa	1,600 kg
SQVY 211763-4 B	3,800 x 3,925 x 1,600 mm	D(e): 25 dB(A)	<25 Pa	1,140 kg

(1) NORM DIN EN ISO 10140-2 - Specifies a laboratory method for measuring the airborne sound insulation of building products
 DIN EN ISO 3744 - Specifies methods for determining the sound power level or sound energy level of a noise source

(2) total pressure drop at maximum air-flow

R-410A Conveni-Pack refrigeration system with heat recovery

Refrigeration solution for food retailers featuring award winning technology for heat recovery

- › Integrates high and low temperature refrigeration and air conditioning (including heating) into one system
- › By using heat recovery, optimised controls and state of the art compressor technology, Conveni-pack can reduce annual energy consumption up to 50% or more, compared to conventional systems
- › Lower associated CO₂ emissions thanks to the heat pump technology
- › Conveni-pack's modular design allows it to be used for smaller as well as larger shops
- › The modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet individual installation constraints
- › The heat extracted from the refrigeration showcases or evaporators can be re-used for comfort heating of the shop at no extra cost
- › Low sound level including „night mode“ operation

More details and final information can be found by scanning or clicking the QR codes.



LRYEQ-AY

Medium Temperature Refrigeration				LRYEQ-AY	16
Cooling capacity	Air conditioning	Nom.		kW	14.0 (1)
	Refrigeration	Nom.		kW	21.8 (2)
Heating capacity	Air conditioning	Nom.		kW	27.0 (3)
	Refrigeration	Nom.		kW	21.8 (4)
Dimensions	Unit	Height		mm	1,680
		Width		mm	1,240
		Depth		mm	765
Weight	Unit			kg	370
Heat exchanger	Type				Cross fin coil
Compressor	Type				Hermetically sealed scroll compressor
	Piston displacement			m ³ /h	13.34
	Speed			rpm	6,300
	Output			W	2,500
	Starting method				Direct on line (inverter driven)
	Frequency ON/OFF				Less than 6 times/hour
Compressor 2	Speed			rpm	2,900
	Output			W	3,600
Compressor 3	Speed			rpm	2,900
	Output			W	4,500
Fan	Type				Propeller fan
	Quantity				2
Fan motor	Air flow rate	Cooling	Nom.	m ³ /min	230
	Output			W	750
Sound pressure level	Drive				Direct drive
	Nom.			dB(A)	62.0
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-20~-10
	Cooling	Ambient	Min.~Max.	°CDB	-5~-43
	Heating	Ambient	Min.~Max.	°CDB	-15~-21
Refrigerant	Type				R-410A
	GWP				2,087.5
	Charge			kg	11.5
				TCO _{2eq}	24.0
Power supply	Control				Electronic expansion valve
	Phase/Frequency/Voltage			Hz/V	3~/50/380-415

(1) Cooling priority mode: indoor temp. 27°CDB, 19°CWB; outdoor temp. 32°CDB; piping length: 7.5m; level difference: 0m (2) Cooling priority mode: evaporating temp. -10°C; outdoor temp. 32°CDB; Suction SH: 10°C (3) Heat recovery 100% mode: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; refrigeration load 18kW; piping length: 7.5m; level difference: 0m (4) Saturated temperature equivalent to suction pressure (refrigeration side): -10°C (under chilled condition); connection capacity for indoor air conditioner: 10HP, when heat recovery is 100%



Conveni pack, in combination with a ZEAS unit.




This store was nominated by spar as its 'local supermarket of the year', thanks in part to its owner's strategic investment in a key department: Refrigeration.

By installing a Conveni pack in combination with Zeas, it was possible to **save around €10,000 on energy costs each year**, from money that would otherwise have spent on heating. **SPAR, Supermarket.**

Indoor units and Biddle air curtains for connection to R-410A Conveni-Pack

To respond to all shop requirements for comfort cooling and heating, a wide range of air conditioning indoor units and Biddle air curtains are available.

			Capacity class (kW)								
Model	Product name		50	63	71	80	100	125	140	200	250
Cooling capacity (kW) ¹			5.6	7.1	8.0	9.0	11.2	14.0	16.0	22.4	28.0
Heating capacity (kW) ²			6.3	8.0	9.0	10.0	12.5	16.0	18.0	25.0	31.5
Round flow cassette	FXFQ-A		●	●		●	●	●			
2-way blow ceiling mounted cassette	FXCQ-A		●	●		●		●			
Ceiling mounted corner cassette	FXKQ-MA			●							
Concealed ceiling unit with inverter driven fan	FXSQ-A		●	●		●	●	●			
Concealed ceiling unit with inverter driven fan	FXMQ-P7		●	●		●	●	●			
Large concealed ceiling unit	FXMQ-MB									●	●
Ceiling suspended unit	FXHQ-A			●			●				
4-way blow ceiling suspended unit	FXUQ-A				●		●				
Floor standing unit	FXLQ-P		●	●							
Concealed floor standing unit	FXNQ-A		●	●							

			Capacity class (kW)					
Model	Product Name		80	100	125	140	200	250
Heating capacity (kW) ²			7.4 - 9.2	11.6 - 13.4	15.6	16.2 - 19.9	29.4	29.4 - 31.1
Biddle air curtain free hanging	CYVS-DK		●	●	●	●	●	●
Biddle air curtain cassette	CYVM-DK		●	●	●	●	●	●
Biddle air curtain recessed	CYVL-DK		●	●	●	●	●	●

¹ Nominal cooling capacities are based on: indoor temperature: 27°CDB / 19°CWB, outdoor temperature: 35°CDB, piping length: 7,5m, level difference: 0m

² Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB / 6°CWB, piping length: 7,5m, level difference: 0m

Booster unit for R-410A

- › A booster unit allows to connect freezer showcases / rooms to ZEAS and Conveni-Pack outdoor units
- › Reduced piping requirements, from 4 to 2 pipes, compared to a conventional system
- › Low sound mode available reducing sound emissions significantly without giving in on Refrigerating capacity

More details and final information can be found by scanning or clicking the QR codes.




LCBKQ-AV1




Booster with ZEAS:

MEDIUM + LOW TEMPERATURE refrigeration

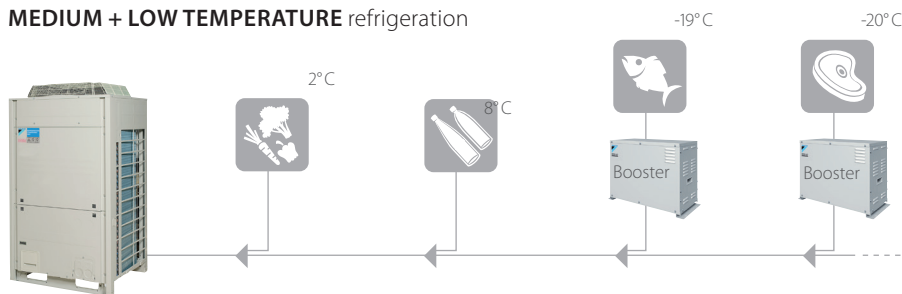

Booster with R-410A Conveni-Pack:

MEDIUM + LOW TEMPERATURE refrigeration + space air conditioning + Biddle air curtain

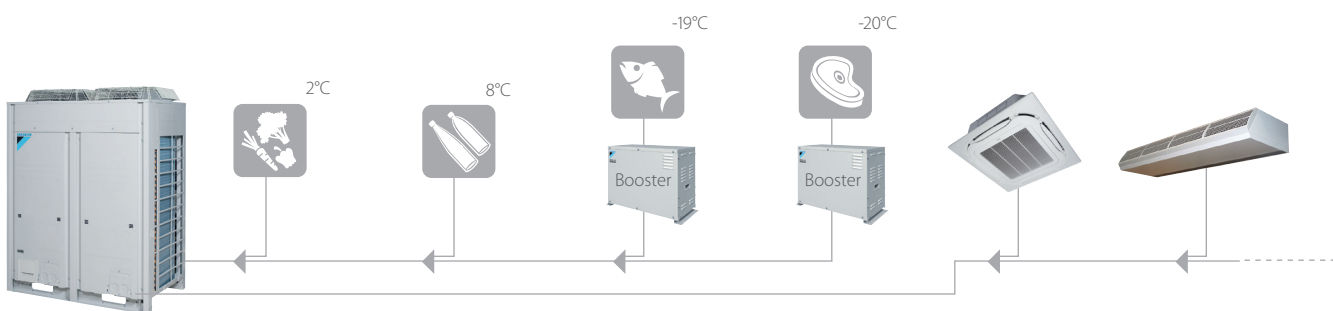

Low Temperature Refrigeration				LCBKQ-AV1	3
Refrigerating capacity	Low temperature	Nom.	kW		3.35 (1)
Dimensions	Unit	Height	mm		480
		Width	mm		680
		Depth	mm		310
			kg		47
Weight	Unit				
Compressor	Type				Hermetically sealed swing compressor
	Piston displacement		m ³ /h		10.16
	Number of revolutions		rpm		6,540
	Output		W		1,300
	Starting method				Direct on line (inverter driven)
	Frequency ON/OFF				Less than 6 times/hour
Fan	Type				Propeller fan
	Air flow rate	Cooling	Nom.	m ³ /min	1.6
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-45~-20
	Ambient temperature	Min.~Max.		°C	-15~43
Refrigerant	Type				R-410A
	GWP				2,087.5
	Control				Electronic expansion valve
Piping connections	For outdoor unit	Liquid	OD	mm	6.35
	To indoor unit	Liquid	OD	mm	6.35
	For indoor unit	Gas	OD	mm	15.9
	To outdoor unit	Gas	OD	mm	9.5
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240

(1) Evaporating temp. -35°C; outdoor temp. 32°C; suction SH 10K; saturated temp. to discharge pressure of booster unit -10°C



Evaporators

Evaporators with or without TEV for different operations and refrigerants

General features:

- › Capacity for LT/MT cooling: 0,5 to 213 kW
- › Ambient/cooling room temperature range: - 40°C - +25°C
- › Refrigerants: R134A a, R 449A, R448A, R452A R407F, R 407A
- › Fin distance: from 3 mm to 11 mm
- › Fin materials: Al
- › Tube materials: Cu
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

Options:

- › Electric defrost heating
- › Hot gas defrost
- › Drain pan heating
- › Fan ring heater
- › High efficient EC fans
- › Wiring on terminal box
- › Included valves and regulation
- › Fin materials AISI 304, AISI 316
- › Tube materials AISI 304, AISI 316
- › Casing in stainless steel (Inox)




Types:

- › flat evaporator
- › double flow
- › cubic design
- › Evaporator only
- › Evaporator + EEV/TEV
- › Evaporator + EEV/TEV + electronic controller


For technical selection, prices, accessories and delivery time please use the Zanotti software and contact our technical department. We are happy to help you.

Dimensions


Flat




mm	A	B	C
201	215	614	410
202	215	1,034	410
203	215	1,614	410
232	150	713	455
301	300	910	690
302	300	1,530	690
303	300	2,150	690
304	300	2,770	690
305	300	3,390	690




Double flow

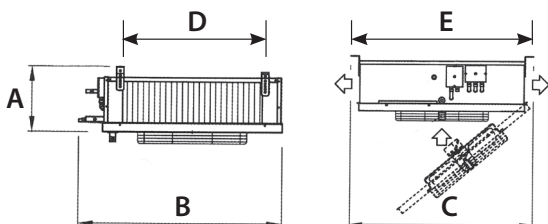


mm	A	B	C	D	E
231	171	579	585	293	600
232	171	889	585	603	600
233	171	1,199	585	913	600
234	171	1,509	585	1,223	600
352	300	1,671	995	1,214	1,065
353	300	2,291	995	1,834	1,065
354	300	2,911	995	2,454	1,065
355	300	3,531	995	3,074	1,065

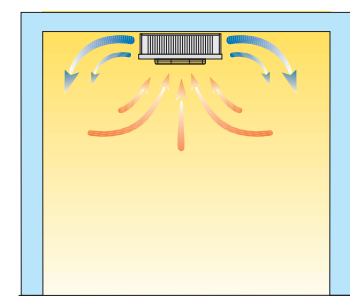

Cubic

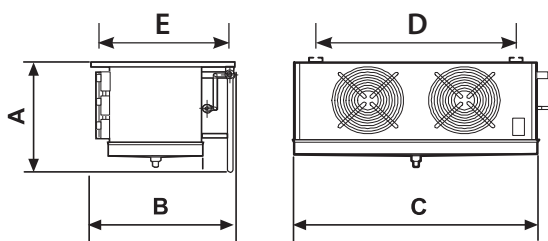

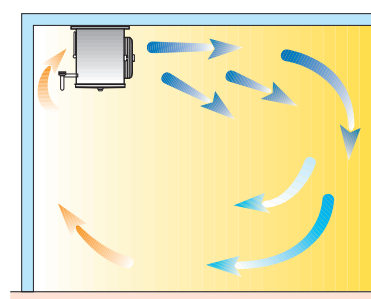

mm	A	B	C	D	E
301	420	480	789	495	345
302	420	480	1,254	960	345
303	420	480	1,719	1,425	345
HEU351	545	690	805	605	540
HEU352	530	690	1,220	965	540
HEU353	600	690	1,690	1,370	540
HEU403	620	700	1,840	1,520	545
HEU502	844	992	1,829	1,526	740
SKC352	490	606	1,614	1,270	450
SKC353	490	606	2,234	1,890	450
SKC452	610	650	2,032	1,680	510
SKC503	800	830	3,350	2,760	675





Options

Options for ZEAS and Conveni-Pack

	CO ₂ Conveni-Pack		Conveni-Pack	ZEAS							Multi-ZEAS		
	LRYEN10AY1	LRNUN5AY1	LRYEQ16AY	LREQ5BY1	LREQ6BY1	LREQ8BY1	LREQ10BY1	LREQ12BY1	LREQ15BY1	LREQ20BY1	LREQ15BY1Rx2	LREQ20BY1Rx2	
Digital pressure gauge kit	-		BHGP26A1										
Pressure gauge kit	-		KHGP26B140										
Pressure Reduction Kit	EKPRV1		-										
(a+b+c+d) kit	KPS26C504	KPS26C160	KPS26C504	KPS26C160	KPS26C280				KPS26C504				
a. Air outlet	KPS26C504T (left side)	KPS26C160T	KPS26C504T	KPS26C160T	KPS26C280T				KPS26C504T				
b. Air inlet (left)	KPS26C504B	-	KPS26C504L	KPS26C504L									
c. Air inlet (right)	KPS26C504L	KPS26C160L	KPS26C504R	KPS26C504R									
d. Air inlet (rear)	KPS26C504R	KPS26C160R	KPS26C504B	KPS26C160B	KPS26C280B				KPS26C504B				
Air outlet	KPS26C160T (right side)	-											
Air inlet (rear)	KPS26C160B (right side)	-											
Central drain pan kit	-		KWC26C450**	KWC26C160	KPS26C280				KPS26C450		KPS26C450*** x2		
Modbus communication kit	BRR9B1V1		BRR9A1V1							BRR9A1V1****			
Booster unit	-		LCBKQ3AV19									-	
Suction branch pipe for multi	-		-									EKHRQZM*****	
Refnet header	-		KHRQM22M29H8										
	-		KHRQ22M64H8										
	-		KHRQM22M75H8										
Refnet joint	-		KHRQ22M20TA8										
	-		KHRQ22M29T9										
	-		KHRQ22M64T8										
	-		KHRQ22M75T8										
	DSC601C51		-										
	DCM601A51		-										

* Snowbreak hoods are field-supplied. For technical drawings and more information, contact your dealer. It is recommended to install a snowbreak hood when regular snowfall occurs.

** In cold areas, provide a drain pan heater (field supply) to prevent drained water from freezing up in the drain pan *** required for each module


**** software update required (to be executed during commissioning) ***** mandatory

Digital pressure gauge kit

BHGP26A1

The digital measurement display allows you to diagnose a unit at a glance and it can be used with all ZEAS and R-410A Conveni-Pack systems.

- › Digital measurement display for fixed installation or service applications.
- › Displays high and low pressure.
- › Displays error codes in the event of a fault.
- › Displays up to 32 operating parameters.
- › Displays error code history (last three).
- › Scrolls and stores output values.
- › Automatically returns to normal operating display mode.

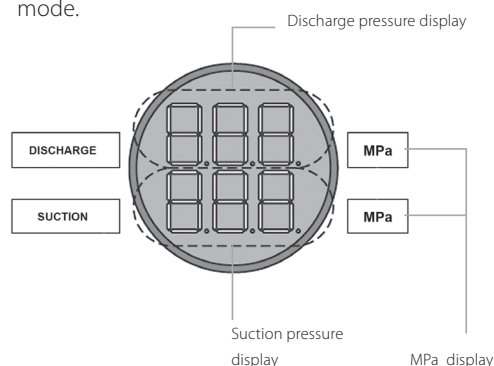

Modbus communication kit

BRR9A1V1


The Daikin Modbus Communication Interface lets you fully integrate Daikin ZEAS and Daikin R-410A Conveni-Pack systems with building control automation networks and other monitoring systems.

The interface allows you to read all the operational parameters and control important values using the Modbus protocol. This unifying component transforms ZEAS and Conveni-Pack into a transparent, customisable refrigeration unit and means that you can create object-specific and energy-optimised shop concepts, including remote monitoring application.

Pro interfaces can be used to connect up to 32 ZEAS units, and are also suitable for use with R-410A Conveni-Pack systems and the Booster.

Control values

- › Target evaporation temperature
- › Low pressure level for on and off points
- › Forced stop
- › Error messages can be cancelled remotely

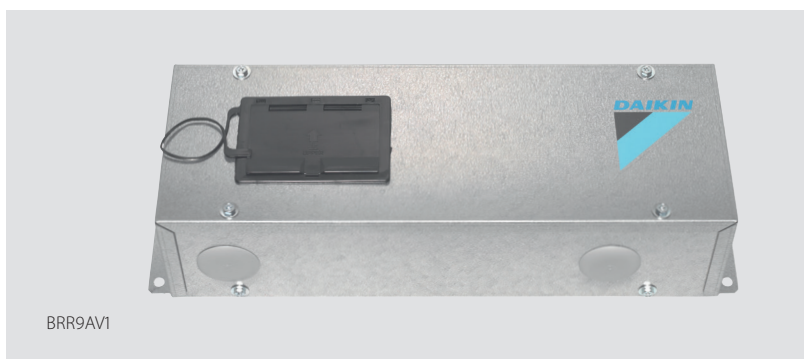

Display values

- › Model information and operating status
- › Refrigerant operating pressure and temperatures
- › Electrical operating data and temperatures for components
- › Target values
- › Fan stage and compressor frequency, operating hours
- › Warning and error messages as well as system safety functions


Modbus communication kit

The Daikin Modbus Communication Interface lets you fully integrate Daikin ZEAS and Daikin CO₂ Conveni-Pack systems with building control automation networks and other monitoring systems.

The interface allows you to read all the operational parameters and control important values using the Modbus protocol on refrigeration and comfort side. This unifying component transforms CO₂ Conveni-Pack into a transparent, customisable refrigeration unit and means that you can create object-specific and energy-optimised shop concepts, including remote monitoring application.

Pro interfaces can be used to connect up to 7 CO₂ Conveni-Pack units.

More details and final information can be found by scanning or clicking the QR codes.

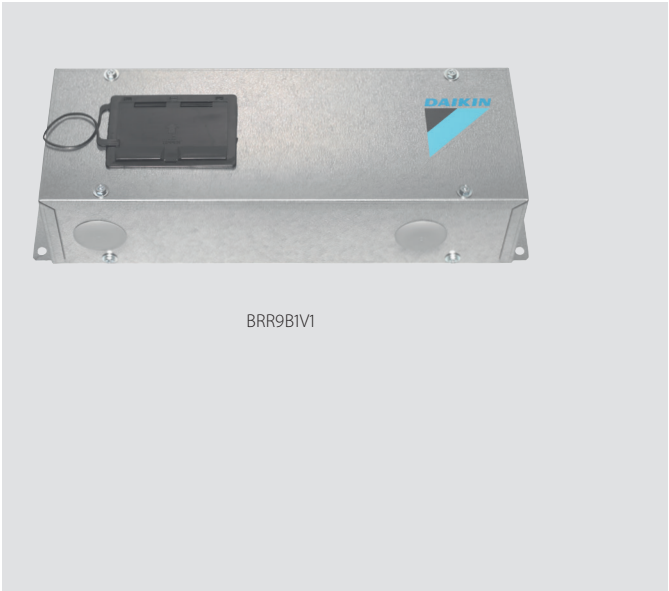



Round Flow CO₂ Cassette Indoor unit for CO₂ Conveni-Pack



To respond to all shop requirements for
comfort cooling and heating




360° AIR DISCHARGE
FOR OPTIMUM
EFFICIENCY & COMFORT



www.daikin.eu

Daikin Europe N.V. Brussels Office · Naamloze Vennootschap · The Bridge · Chaussee de Mons 1424 · 1070 Brussels · www.daikin.eu



ECPEN22-800



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.