



AIR CONDITIONERS

for shops, restaurants and offices

4-WAY BLOW CEILING SUSPENDED UNIT

R-410A



www.daikin.eu

FUQ-B



THE 4-WAY BLOW CEILING SUSPENDED CASSETTES ARE THE IDEAL SOLUTION FOR ROOMS, SHOPS OR OFFICES WITHOUT FALSE CEILINGS. SINCE THEY ARE INSTALLED DIRECTLY INTO THE CEILING THEY DO NOT TAKE UP ANY FLOOR OR WALL SPACE. THESE INDOOR UNITS ARE AN EXCELLENT SOLUTION FOR LARGER AREAS WITH HIGH OCCUPANCY.



COMFORT


- › Air flow distribution for **ceiling heights** up to 3.5m without loss of capacity.
- › To maximize your comfort, you are able to select several **air flow patterns** from your remote control:

Draught prevention (heating mode):

Prevents draughts by automatically changing to horizontal air flow discharge when heating mode is started up.


Auto swing:

Vertical auto swing automatically moves the flaps up and down to distribute air effectively throughout the whole room.




5 different air flow patterns:

All five different air flow patterns between 0° and 60° can be freely selected. The chosen air flow pattern will be maintained during the operation of the air conditioner.



Auto blow air flow control:

The last selected air flow pattern is memorized and automatically reset the next time the unit is turned ON. Initial setting is 30° for cooling and 60° for heating.



- › You have the choice of 2 **fan speeds** to select: high or low. A high fan speed provides maximum reach while a low fan speed minimizes draughts.
- › Daikin's special **dry programme** reduces humidity in the room without variations in room temperature.
- › The indoor unit contains an air **filter** which removes microscopic particles and dust.


EXCELLENT SOLUTION FOR ROOMS WITHOUT FALSE CEILING

- › Ideal for refurbishment
- › Excellent solution for larger areas with high occupancy
- › Different air flow patterns to ensure your comfort
- › Energy efficient


FLEXIBLE INSTALLATION AND EASY TO USE AND MAINTAIN

- › The **air** is discharged in 4 directions.
- › It is possible to **shut off one or 2 flaps** enabling the unit to be installed in the middle of the room, in a corner or in a small room.

2-Way blow




3-Way blow



4-Way blow



- › The **outdoor unit** can be installed on a roof or terrace or placed against an outside wall.
- › Special **anti-corrosion treatment** of the outdoor unit's heat exchanger fin, gives greater resistance against acid rain and salt corrosion. Additional resistance is provided by a rustproof steel sheet on the underside of the unit.
- › Daikin **remote controls** give you easy control at your fingertips.
- › The **wired remote control** (optional) provides you with a schedule timer, enabling the air conditioning to be programmed daily or weekly.
- › The optional **remote ON/OFF** enables you to start/stop the air conditioning from a mobile phone via a telephone remote control (field supply).
- › The optional **forced OFF** enables you to switch off the unit automatically. E.g. when a window is opened, the unit switches off.

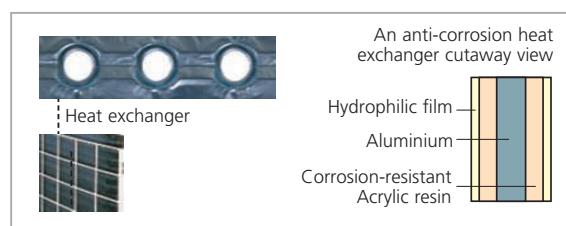

Infrared remote control (Optional)



Wired remote control (Optional)

ENERGY EFFICIENT

› **A** Energy label: up to class A

› The **inverter technology**, developed by Daikin is a true innovation in the area of climate control. The principle is simple: inverters adjust the power used to suit the actual requirement. No more, no less. This technology provides you with two concrete benefits:

1. Comfort

The inverter repays its investment many times over by improving comfort.


An air conditioning system with an inverter continuously adjusts its cooling and heating output to suit the temperature in the room.

The inverter shortens system start-up time enabling the required room temperature to be reached more quickly.

As soon as that temperature is reached, the inverter ensures that it is constantly maintained.

2. Energy efficient

Because an inverter monitors and adjusts ambient temperature whenever needed, energy consumption drops by 30% compared to a traditional on/off system!

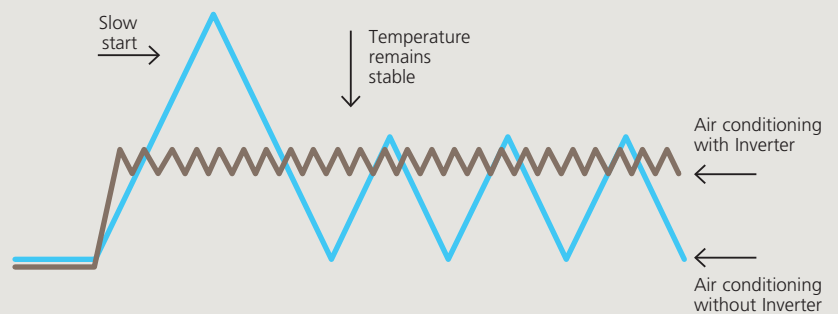

› The **'home leave'** function button should be set when the occupant leaves the room for a lengthy period of time, such as a holiday. When the function is activated, the room temperature is automatically set to a minimum of 10°C, at which point all connected indoor units will switch to heating mode.

The function ceases to operate when the room temperature reaches 15°C and should also be switched off when the occupant returns home.



APPLICATION OPTIONS

- › This model can be used for **cooling and heating (heat pump) or cooling only**.
- › It is possible to use the indoor unit in **pair** (connecting one indoor to one outdoor), **twin, triple** application (connecting up to 3 indoors in the same room to a single outdoor).



DID YOU KNOW *that ...*

energy savings are increased significantly when you choose an air conditioner that can heat as well as cool? Indeed, with a heat pump, warmth from outdoors is transported indoors for free, even with negative outside temperatures.

CAPACITY AND POWER INPUT

COOLING ONLY - NON INVERTER (air cooled)				FUQ71B	FUQ100B	FUQ125B			
				RR71BV3 / W1	RR100BV3 / W1	RR125BW1			
Cooling capacity	nominal		kW	7.10	10.00	12.20			
Nominal input	nominal		kW	2.70/2.65	3.83/3.78	4.57			
EER				2.63/2.68	2.61/2.65	2.67			
Energy label				D/D	D/D	D			
Annual energy consumption	cooling		kWh	1,350/1,325	1,915/1,890	2,285			
HEAT PUMP - NON INVERTER/INVERTER CONTROLLED (air cooled)				FUQ71B	FUQ100B	FUQ125B	FUQ71B	FUQ100B	FUQ125B
				RQ71BV3 / W1	RQ100BV3 / W1	RQ125BW1	RZQ71CV1	RZQ100CV1 / BW1	RZQ125CV1 / BW1
Cooling capacity	nominal		kW	7.10	10.00	12.20	7.1	10.00	12.50
Heating capacity	nominal		kW	8.00	11.20	14.50	8.0	11.20	14.00
Nominal input	cooling	nominal	kW	2.70/2.65	3.83/3.78	4.57	2.21	3.12/3.12	4.15/4.05
	heating	nominal	kW	2.53/2.44	3.58/3.54	4.88	2.34	3.37/3.28	4.33/4.36
EER				2.63/2.68	2.61/2.65	2.67	3.21	3.21/3.21	3.01/3.09
COP				3.16/3.28	3.13/3.16	2.97	3.42	3.32/3.41	3.23/3.21
Energy label	cooling			D/D	D/D	D	A	A/A	B/B
	heating			D/C	D/D	D	B	C/B	C/C
Annual energy consumption	cooling		kWh	1,350/1,325	1,915/1,890	2,285	1,105	1,560/1,560	2,025/2,025


Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

TWIN/TRIPLE APPLICATION	FUQ71B	FUQ100B	FUQ125B
RZQ140	2		
RZQ200	3	2	
RZQ250			2

Height	165 mm
Width	895 mm
Depth	895 mm

Height	1,170 mm
Width	900 mm
Depth	320 mm



SPECIFICATIONS INDOOR UNITS

COOLING ONLY/HEAT PUMP				FUQ71B	FUQ100B	FUQ125B
Dimensions	HxWxD	mm		165x895x895	230x895x895	
Weight		kg		25	31	
Casing colour				White		
Air flow rate	cooling	H/L	m ³ /min	19/14	29/21	32/23
	heating	H/L	m ³ /min	19/14	29/21	32/23
Fan speed				2 steps		
Sound pressure level	cooling	H/L	dB(A)	40/35	43/38	44/39
	heating	H/L	dB(A)	40/35	43/38	44/39
Sound power level	cooling	H/L	dB(A)	56/51	59/54	60/55
		liquid	mm	Ø 9.5		
Piping connections		gas	mm	Ø 15.9		
		drain (VP20)	ID mm	Ø 20		
			OD mm	Ø 26		
Heat insulation				Both liquid and gas pipes		

SPECIFICATIONS OUTDOOR UNITS

COOLING ONLY - NON INVERTER CONTROLLED				RR71BV3/W1	RR100BV3/W1	RR125BW1							
Dimensions	HxWxD	mm		770x900x320	1,170x900x320								
Weight		kg		83/81	102/99	106							
Casing colour				Daikin white									
Sound pressure level		H	dB(A)	50	53	53							
Sound power level		H	dB(A)	63	66	67							
Compressor		type		Hermetically sealed scroll									
Refrigerant type				R-410A									
Refrigerant charge		kg/m		2.70	3.70	3.70							
Maximum piping length		m		70 (equivalent length 90)									
Maximum level difference		m		30									
Operation range		from ~ to	°CDB	-15~46									
HEAT PUMP - NON INVERTER/INVERTER CONTROLLED				RQ71BV3W1	RQ100BV3/W1	RQ125BW1	RZQ71CV1	RZQ100CV1	RZQ100BW1	RZQ125CV1	RZQ125BW1		
Dimensions	HxWxD	mm		770x900x320	1,170x900x320			770x900x320	1,170x900x320	1,345x900x320	1,770x900x320	1,345x900x320	
Weight		kg		84/83	103/101	108	67	103	106	103	106	106	
Casing colour				Daikin white						Ivory white			
Sound pressure level (night quiet mode)	cooling	H	dB(A)	50	53	53	47(43)	49(45)	49(45)	50(45)	50(45)		
	heating	H	dB(A)	-	-	-	49	51	51	52	52		
Sound power level	cooling	H	dB(A)	63	66	67	63	65	65	66	66		
Compressor		type		Hermetically sealed scroll						Herm. sealed swing	Hermetically sealed scroll		
Refrigerant type				R-410A									
Refrigerant charge		kg/m		2.70	3.70	3.70	2.75	3.7	4.3	3.7	4.3		
Maximum piping length		m		70 (equivalent length 90)						50 (equiv. length 70)	75 (equivalent length 95)		
Maximum level difference		m		30									
Operation range	cooling	from ~ to	°CDB	-5~46						-15~50			
	heating	from ~ to	°CWB	-10~15						-20~15.5			



ACCESSORIES: CONTROL SYSTEMS

INDOOR UNITS	FUQ71B	FUQ100B	FUQ125B
Wired remote control		BRC1D52	
Infrared remote control	cooling only	BRC7C529	
	heat pump	BRC7C528	
Centralised remote control		DCS302C51	
Unified ON/OFF control		DCS301B51	
Schedule timer		DST301B51	
Electrical box with earth terminal (2 blocks)		KJB212A	
Electrical box with earth terminal (3 blocks)		KJB311A	
Wiring adapter for electrical appendices (1)		KRP4A53*	
Interface adapter for Sky Air		DTA112B51	
Installation box for adapter PCB		KRP1B97	
Remote ON/OFF		EKRORO	
Remote sensor		KRCS01-1	

(1) Installation box for adapter PCB (KRP1B97) is necessary for each adapter marked with *.

ACCESSORIES: INDOOR UNITS

INDOOR UNITS	FUQ71B	FUQ100B	FUQ125B
L-type piping kit		KHFP49MA140	
Replacement long-life filter		KAF495FA140	
Sealing member of air discharge outlet	KDBH49FA80		KDBHJ49F140
Decoration panel for air discharge	KDBTJ49F80		KDBTJ49F140
Vertical flap kit	KDGJ49F80		KDGJ49F140

ACCESSORIES: OUTDOOR UNITS

OUTDOOR UNITS	RR/RQ71B	RR/RQ100B	RR/RQ125B	RZQ71CV1	RZQ100CV1/BW1	RZQ125CV1/BW1
Central drain plug		KKPJ5F180			KKPJ5F180	
Refrigerant branch piping	for twin	KHRQ22M20TA			KHRQ22M20TA	
	for triple	-	KHRQ127H	-	KHRQ127H	
Demand adapter kit	remote control of sound reduction and power input	-	-	-	KRP58M51	

1) V1 = 1~, 230V, 50Hz; V3 = 1~, 230V, 50Hz

2) Nominal cooling capacities are based on: indoor temperature 27°CDB / 19°CWB • outdoor temperature 35°CDB • refrigerant piping length 7.5m • level difference 0m.

3) Nominal heating capacities are based on: indoor temperature 20°CDB • outdoor temperature 7°CDB / 6°CWB • refrigerant piping length 7.5m • level difference 0m.

4) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.

5) Units should be selected on nominal capacity. Max. capacity is limited to peak periods.

6) The sound pressure level is measured via a microphone at a certain distance from the unit (for measuring conditions: please refer to the technical data books).



In all of us,
a green heart



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues.

For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment.

This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.




Daikin units comply with the European regulations that guarantee the safety of the product.



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FC); the certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units.

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

Daikin products are distributed by:

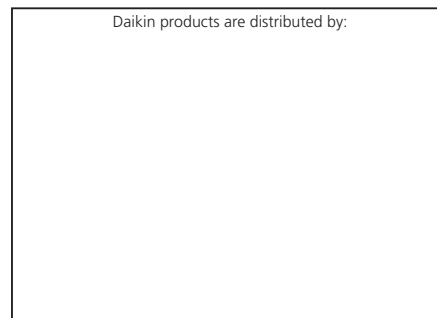

DAIKIN EUROPE N.V.

Naamloze Vennootschap
Zandvoordestraat 300
B-8400 Oostende, Belgium
www.daikin.eu
BTW: BE 0412 120 336
RPR Oostende



Mixed Sources
Product group from well-managed
forests and other controlled sources
www.fsc.org Cert no. SGS-COC-003924
© 1996 Forest Stewardship Council



EPLEN08-112

EPLEN08-112 • 1000 • 12/07 • Copyright © Daikin
The present publication supersedes EPLEN07-112.
Printed on non-chlorinated paper. Prepared by La Movidia, Belgium
Responsible Editor: Daikin Europe N.V., Zandvoordestraat 300, B-8400 Oostende